


Epson MA406

- Small Footprint for High Density
- Tape & Reel or Bulk Packaging
- Molded Plastic Package
- Excellent Heat & Environmental Characteristics



Parameter	MA406	
Frequency Range	4.00MHz to 30.00MHz 26.001MHz to 64.00MHz	Fund 3 rd O/tone
Calibration Tolerance @ 25 ^o C	+/-50ppm standard	
Temperature Tolerance	+/-50ppm below 5.5MHz +/-30ppm above 5.5MHz	
Operating Temperature	-20 ^o C to +70 ^o C other options available	Specify
Storage Temp	-55 ^o C to +125 ^o C	
Load Capacitance	5pf to ∞ 16pf standard	Specify
ESR	40Ω to 150Ω Frequency Dependant	
Shunt Capacitance	5pF max	
Drive Level	2.0mW max 10μW to 100μW Recommended	
Aging	+/-5ppm First Year	

Environmental & Mechanical	
Mechanical Shock	EIAJ ED-4701 A-124
Humidity	EIAJ ED-4701 B-121
Vibration	EIAJ ED 4701 A-121
Soldering	260 ^o C for 20s max
Thermal Shock	EIAJ ED-4701 B-131

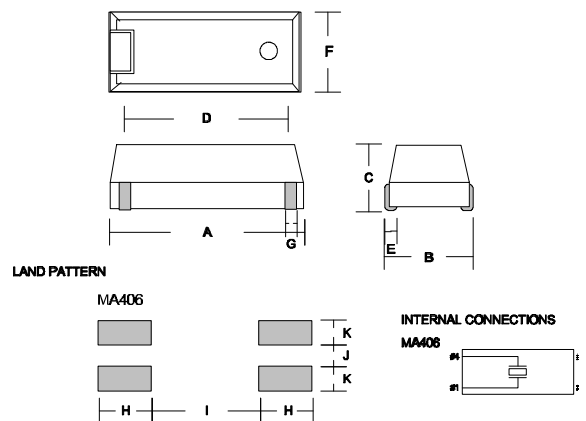

A	B	C	D	E	F	G
11.70	4.80	3.70	9.60	1.20	4.00	0.70

H	I	J	K
1.80	7.80	1.70	1.90

Dimensions in mm

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com