

Ceramic

Frequency Mixer WIDE BAND

MCA1-80LH+


Level 10 (LO Power +10 dBm) 2800 to 8000 MHz

Features

- wide bandwidth, 2800 to 8000 MHz
- low conversion loss, 5.9 dB typ.
- high L-R isolation, 35 dB typ.
- IF, DC to 1250 MHz
- LTCC double balanced mixer
- low cost
- low profile, 0.08"

Applications

- satellite up and down converters
- line of sight links
- defense radar
- defense communication



CASESTYLE: DZ885
PRICE: \$9.95 ea. QTY (10-49)

(Patent pending)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +suffix has been added in order to identify RoHS Compliance. There has been no change to the model's material, form, fit, or function. See our web site for RoHS Compliance methodologies and qualifications.

Mixer Electrical Specifications (T_{AMB}=-55°C to 100°C)

MODEL NO.	FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3@ center band Typ. (dBm)	E FACTOR
	LO/RF f _L -f _U	IF	\bar{x}	σ	Max.	Typ.	Min.	Typ.	Min.		
MCA1-80LH+	2800-3000	DC-1250	6.0	0.2	8.4*	35	25	13	8	15	0.5
	2800-5000	DC-1250									
	5000-8000	DC-1250									

1dB Compr.: +5 dBm typ.
E= (IP3(dBm)-LO Power(dBm))/10
* Conversion loss at 30 MHz IF, increases with IF frequency


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA


Outline Drawing

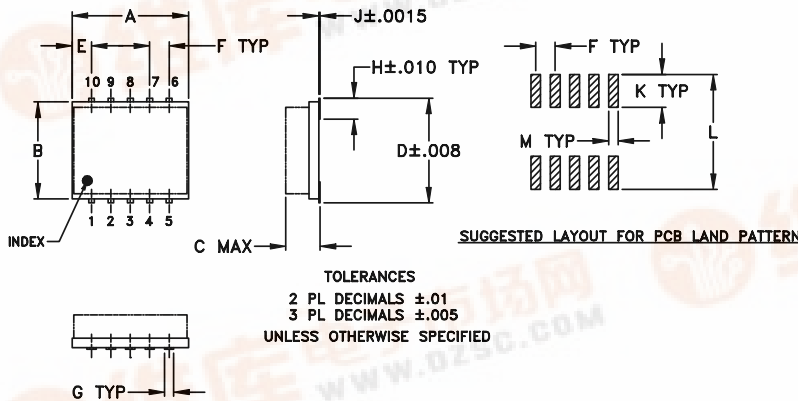

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.085	.274	.050	.050	.012
7.62	6.35	2.16	6.96	1.27	1.27	0.30
H	J	K	L	M	wt	
.057	.004	.085	.296	.030	grams	
1.5	0.10	2.16	7.52	0.76	0.25	

Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)

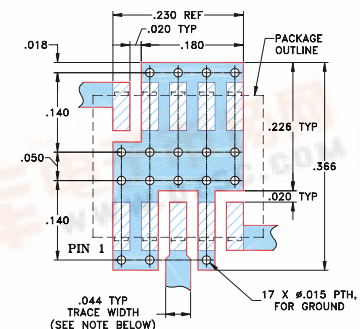

MCA1-80LH+

Typical Performance Data at 25°C

Frequency		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO port (:1)	VSWR RF port (:1)
RF MHz	LO MHz	LO +10 dBm	LO +10 dBm	LO +10 dBm	LO +10 dBm	LO +10 dBm
2800.00	2830.10	5.86	42.01	11.25	2.37	2.65
3100.00	3130.10	5.33	43.77	12.32	2.56	2.29
3400.00	3430.10	5.17	41.01	13.64	2.45	1.84
3700.00	3730.10	5.11	31.53	14.12	2.16	1.49
4000.00	4030.10	6.37	41.29	14.13	2.34	2.46
4300.00	4330.10	6.89	35.37	17.02	2.23	2.31
4600.00	4630.10	6.54	39.20	21.32	2.63	1.94
4900.00	4930.10	6.91	39.89	24.95	2.49	2.71
5200.00	5230.10	5.89	46.23	27.60	2.83	1.95
5500.00	5530.10	5.91	49.01	30.76	3.41	1.93
5800.00	5830.10	6.37	38.83	34.49	2.71	2.08
6100.00	6130.10	5.86	37.35	38.71	2.44	2.09
6400.00	6430.10	5.43	40.56	42.58	2.07	1.93
6700.00	6730.10	5.30	33.67	48.33	1.99	1.64
7000.00	7030.10	5.31	31.70	42.01	1.97	1.76
7300.00	7330.10	5.55	31.52	41.10	2.24	1.77
7600.00	7630.10	5.92	28.55	39.91	1.87	1.65
7800.00	7830.10	6.16	27.10	31.71	1.85	1.52
7900.00	7930.10	6.02	26.59	31.18	1.83	1.41
8000.00	8030.10	5.89	25.89	31.04	1.93	1.43

Performance Charts

