


24 Amp Silicon Rectifiers MD2401 — MD2406

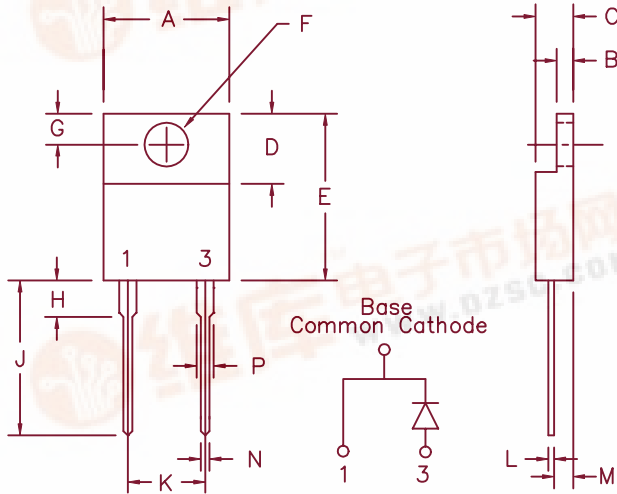

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.390	.415	9.91	10.54	
B	.045	.055	1.14	1.40	
C	.180	.190	4.57	4.83	
D	.245	.260	6.22	6.60	
E	.590	.605	14.99	15.37	
F	.139	.147	3.53	3.73	Dia.
G	.100	.120	2.54	3.05	
H	---	.250	---	6.35	
J	.540	.570	13.72	14.48	
K	.190	.210	4.83	5.33	
L	.021	.025	.533	.640	
M	.080	.115	2.03	2.92	
N	.028	.038	.710	.970	
P	.045	.055	1.14	1.40	

Similar to TO-220AC

Microsemi Catalog Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
MD2401	100V	100V
MD2402	200V	200V
MD2404	400V	400V
MD2406	600V	600V

- Glass Passivated Die
- Excellent Reliability
- V_{RRM} 100 to 600 Volts


Electrical Characteristics

Average Forward Current	$I_F(AV)$ 24 Amps	$T_C = 116^\circ C$, Square wave, $R_{\theta JC} = 1.8^\circ C/W$
Maximum Surge Current	I_{FSM} 150 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Max. Peak Forward Voltage	V_{FM} 1.05 Volts	$I_{FM} = 24A$, $T_J = 175^\circ C^*$
Max. Peak Forward Voltage	V_{FM} 1.15 Volts	$I_{FM} = 24A$, $T_J = 25^\circ C^*$
Max. Peak Reverse Current	I_{RM} 5 mA	V_{RRM} , $T_J = 125^\circ C^*$
Max. Peak Reverse Current	I_{RM} 10 μA	V_{RRM} , $T_J = 25^\circ C$

*Pulse test: Pulse width 300 μsec . Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	TSTG	$-55^\circ C$ to $+175^\circ C$
Operating junction temp range	T_J	$-55^\circ C$ to $+175^\circ C$
Max thermal resistance	$R_{\theta JC}$	$1.8^\circ C/W$
Mounting torque		10-15 inch pounds
Weight		.06 ounces (1.8 grams) typical

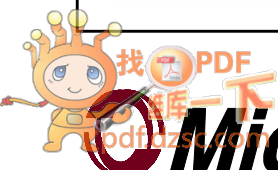

MD2401 — MD2406

Figure 1
Typical Forward Characteristics

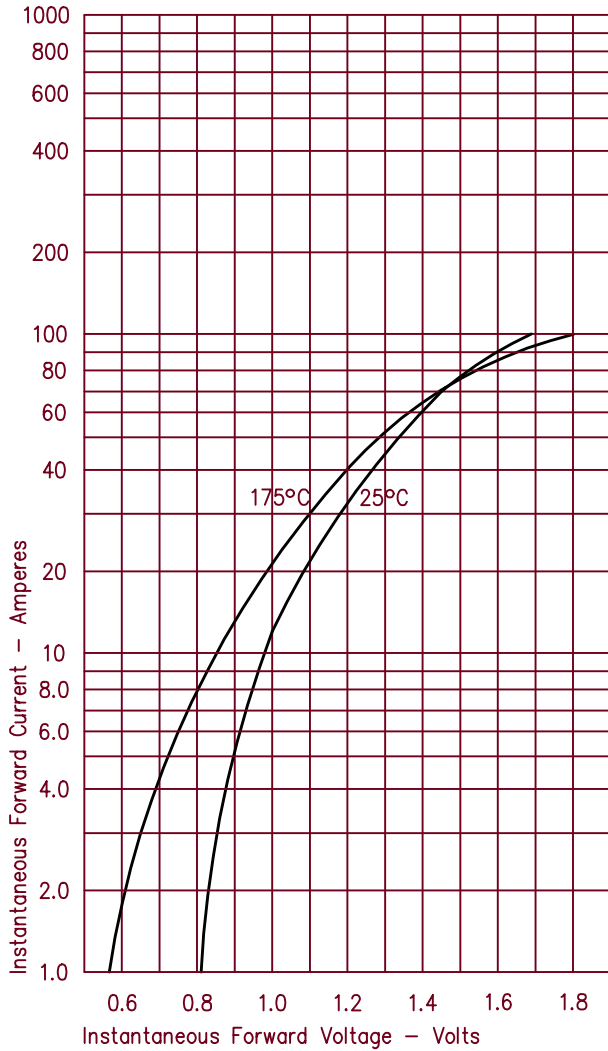


Figure 3
Forward Current Derating - Standard Polarity

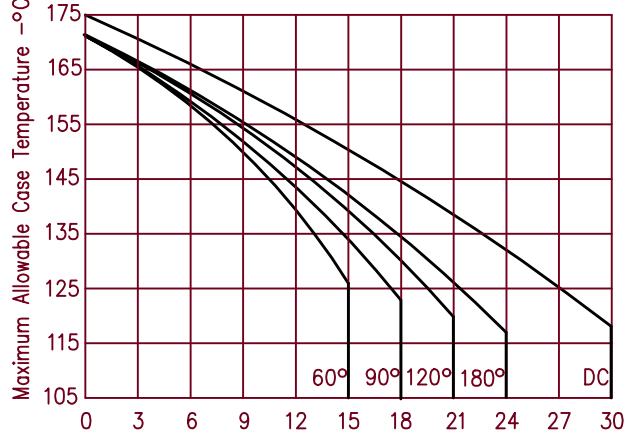


Figure 4
Maximum Forward Power Dissipation

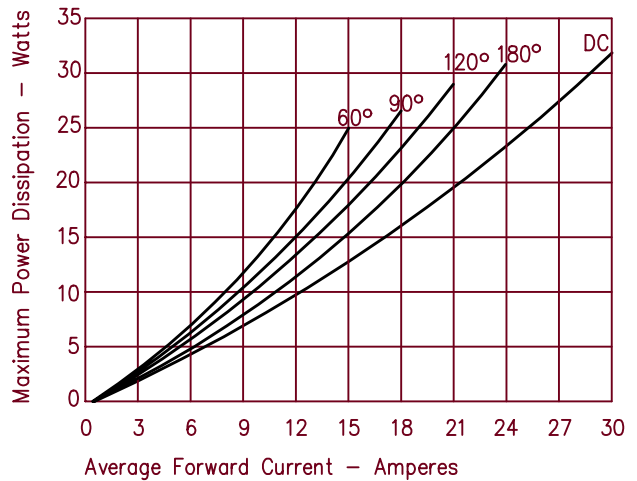


Figure 2
Typical Reverse Characteristics

