



## Features

- Surface Mount Devices
- Fully compatible with current industry standards
- Packaged per EIA 481-2 standard
- Lead free option available
- Agency recognition: 

## Applications

Almost anywhere there is a low voltage power supply and a load to be protected, including:

- Computers & peripherals
- General electronics
- Automotive applications

**BOURNS®**

## MF-SM Series - PTC Resettable Fuses

### Electrical Characteristics

| Model       | V max.<br>Volts | I max.<br>Amps | I <sub>hold</sub> | I <sub>trip</sub> | Resistance        |                    | Max. Time To Trip |                  | Tripped Power Dissipation |
|-------------|-----------------|----------------|-------------------|-------------------|-------------------|--------------------|-------------------|------------------|---------------------------|
|             |                 |                | Amperes at 23 °C  |                   | Ohms at 23 °C     |                    | Amperes at 23 °C  | Seconds at 23 °C | Watts at 23 °C            |
|             |                 |                | Hold              | Trip              | R <sub>Min.</sub> | R <sub>1Max.</sub> |                   | Max.             | Typ.                      |
| MF-SM030    | 60              | 40             | 0.30              | 0.60              | 0.90              | 4.80               | 1.5               | 3.0              | 1.7                       |
| MF-SM050    | 60              | 40             | 0.50              | 1.00              | 0.35              | 1.40               | 2.5               | 4.0              | 1.7                       |
| MF-SM075    | 30              | 80             | 0.75              | 1.50              | 0.23              | 1.00               | 8.0               | 0.3              | 1.7                       |
| MF-SM100*   | 30              | 80             | 1.10              | 2.20              | 0.12              | 0.48               | 8.0               | 0.5              | 1.7                       |
| MF-SM100/33 | 33              | 40             | 1.10              | 2.20              | 0.12              | 0.41               | 8.0               | 0.5              | 1.7                       |
| MF-SM125    | 15              | 100            | 1.25              | 2.50              | 0.07              | 0.25               | 8.0               | 2.0              | 1.7                       |
| MF-SM150    | 15              | 100            | 1.50              | 3.00              | 0.06              | 0.25               | 8.0               | 5.0              | 1.9                       |
| MF-SM150/33 | 33              | 40             | 1.50              | 3.00              | 0.06              | 0.23               | 8.0               | 5.0              | 1.9                       |
| MF-SM185/33 | 33              | 40             | 1.8               | 3.60              | 0.04              | 0.15               | 8.0               | 5.0              | 1.2                       |
| MF-SM200    | 15              | 100            | 2.00              | 4.00              | 0.045             | 0.125              | 8.0               | 12.0             | 1.9                       |
| MF-SM250    | 15              | 100            | 2.50              | 5.00              | 0.024             | 0.085              | 8.0               | 25.0             | 1.9                       |
| MF-SM260    | 6               | 100            | 2.60              | 5.20              | 0.025             | 0.075              | 8.0               | 20.0             | 1.7                       |

\*UL Pending

### Environmental Characteristics

Operating/Storage Temperature ..... -40 °C to +85 °C  
 Maximum Device Surface Temperature in Tripped State ..... 125 °C  
 Passive Aging ..... +85 °C, 1000 hours ..... ±5 % typical resistance change  
 Humidity Aging ..... +85 °C, 85 % R.H. 7 days ..... ±5 % typical resistance change  
 Thermal Shock ..... MIL-STD-202F, Method 107G, ..... ±10 % typical resistance change  
 +125 °C to -55 °C, 10 cycles  
 Vibration ..... MIL-STD-883C, Method 2007.1, Condition A ..... No change

### Test Procedures And Requirements For Model MF-SM Series

| Test            | Test Conditions                                  | Accept/Reject Criteria                   |
|-----------------|--------------------------------------------------|------------------------------------------|
| Visual/Mech.    | Verify dimensions and materials                  | Per MF physical description              |
| Resistance      | In still air @ 23 °C                             | R <sub>min</sub> ≤ R ≤ R <sub>1max</sub> |
| Time to Trip    | At specified current, V <sub>max</sub> , 23 °C   | T ≤ max. time to trip (seconds)          |
| Hold Current    | 30 min. at I <sub>hold</sub>                     | No trip                                  |
| Trip Cycle Life | V <sub>max</sub> , I <sub>max</sub> , 100 cycles | No arcing or burning                     |
| Trip Endurance  | V <sub>max</sub> , 48 hours                      | No arcing or burning                     |
| Solderability   | MIL-STD-202F, Method 208F                        | 95 % min. coverage                       |

UL File Number ..... E174545

<http://www.ul.com/> Follow link to Certifications, then UL File No., enter E174545

CSA File Number ..... CA110338

<http://directories.csa-international.org/> Under "Certification Record" and "File Number" enter 110338-0-000

TÜV Certificate Number ..... R 02057213

<http://www.tuvdotcom.com/> Follow link to "other certificates", enter File No. 2057213

### Thermal Derating Chart - I<sub>hold</sub> / I<sub>trip</sub> (Amps)

| Model       | Ambient Operating Temperature |             |             |             |             |             |             |             |             |
|-------------|-------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|             | -40 °C                        | -20 °C      | 0 °C        | 23 °C       | 40 °C       | 50 °C       | 60 °C       | 70 °C       | 85 °C       |
| MF-SM030    | 0.45 / 0.90                   | 0.40 / 0.80 | 0.35 / 0.70 | 0.30 / 0.60 | 0.25 / 0.50 | 0.23 / 0.46 | 0.20 / 0.40 | 0.17 / 0.34 | 0.14 / 0.28 |
| MF-SM050    | 0.76 / 1.52                   | 0.67 / 1.34 | 0.59 / 1.18 | 0.50 / 1.00 | 0.42 / 0.84 | 0.38 / 0.76 | 0.33 / 0.66 | 0.29 / 0.58 | 0.23 / 0.46 |
| MF-SM075    | 1.13 / 2.26                   | 1.01 / 2.02 | 0.88 / 1.76 | 0.75 / 1.50 | 0.62 / 1.24 | 0.56 / 1.12 | 0.50 / 1.00 | 0.44 / 0.88 | 0.34 / 0.68 |
| MF-SM100    | 1.66 / 3.32                   | 1.47 / 2.94 | 1.29 / 2.58 | 1.10 / 2.20 | 0.91 / 1.82 | 0.83 / 1.66 | 0.73 / 1.46 | 0.64 / 1.28 | 0.50 / 1.00 |
| MF-SM100/33 | 1.66 / 3.32                   | 1.47 / 2.94 | 1.29 / 2.58 | 1.10 / 2.20 | 0.91 / 1.82 | 0.83 / 1.66 | 0.73 / 1.46 | 0.64 / 1.28 | 0.50 / 1.00 |
| MF-SM125    | 1.89 / 3.78                   | 1.68 / 3.36 | 1.46 / 2.92 | 1.25 / 2.50 | 1.04 / 2.08 | 0.94 / 1.88 | 0.83 / 1.66 | 0.73 / 1.46 | 0.56 / 1.12 |
| MF-SM150    | 2.27 / 4.54                   | 2.01 / 4.02 | 1.76 / 3.52 | 1.50 / 3.00 | 1.25 / 2.50 | 1.13 / 2.26 | 0.99 / 1.98 | 0.87 / 1.74 | 0.68 / 1.36 |
| MF-SM150/33 | 2.27 / 4.54                   | 2.01 / 4.02 | 1.76 / 3.52 | 1.50 / 3.00 | 1.25 / 2.50 | 1.13 / 2.26 | 0.99 / 1.98 | 0.87 / 1.74 | 0.68 / 1.36 |
| MF-SM185/33 | 2.56 / 5.12                   | 2.32 / 4.64 | 2.08 / 4.16 | 1.85 / 3.70 | 1.60 / 3.20 | 1.44 / 2.88 | 1.28 / 2.56 | 1.12 / 2.24 | 0.88 / 1.76 |
| MF-SM200    | 3.02 / 6.04                   | 2.68 / 5.36 | 2.34 / 4.68 | 2.00 / 4.00 | 1.66 / 3.32 | 1.50 / 3.00 | 1.32 / 2.64 | 1.16 / 2.32 | 0.90 / 1.80 |
| MF-SM250    | 3.78 / 7.56                   | 3.35 / 6.70 | 2.93 / 5.86 | 2.50 / 5.00 | 2.08 / 4.16 | 1.88 / 3.76 | 1.65 / 3.30 | 1.45 / 2.90 | 1.13 / 2.26 |
| MF-SM260    | 3.64 / 7.28                   | 3.25 / 6.50 | 2.91 / 5.82 | 2.60 / 5.20 | 2.26 / 4.52 | 2.08 / 4.16 | 1.95 / 3.90 | 1.74 / 3.48 | 1.48 / 2.96 |

Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.

## Additional Features

- Patents pending

# MF-SM Series - PTC Resettable Fuses

**BOURNS®**


## Product Dimensions

| Model       | A               |                 | B               | C               | D               |                 | E               |                 | F               |                 | G               |                 | H               |
|-------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|             | Min.            | Max.            | Max.            | Max.            | Min.            | Max.            | Min.            | Max.            | Min.            | Max.            | Min.            | Max.            | Min.            |
| MF-SM030    | 6.73<br>(0.265) | 7.98<br>(0.314) | 3.18<br>(0.125) | 5.44<br>(0.214) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 2.16<br>(0.085) | 2.41<br>(0.095) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM050    | 6.73<br>(0.265) | 7.98<br>(0.314) | 3.18<br>(0.125) | 5.44<br>(0.214) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 2.16<br>(0.085) | 2.41<br>(0.095) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM075    | 6.73<br>(0.265) | 7.98<br>(0.314) | 3.18<br>(0.125) | 5.44<br>(0.214) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 2.16<br>(0.085) | 2.41<br>(0.095) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM100    | 6.73<br>(0.265) | 7.98<br>(0.314) | 3.00<br>(0.118) | 5.44<br>(0.214) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 2.16<br>(0.085) | 2.41<br>(0.095) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM100/33 | 6.73<br>(0.265) | 7.98<br>(0.314) | 3.00<br>(0.118) | 5.44<br>(0.214) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 2.16<br>(0.085) | 2.41<br>(0.095) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM125    | 6.73<br>(0.265) | 7.98<br>(0.314) | 3.00<br>(0.118) | 5.44<br>(0.214) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 2.16<br>(0.085) | 2.41<br>(0.095) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM150    | 8.00<br>(0.315) | 9.50<br>(0.374) | 3.00<br>(0.118) | 6.71<br>(0.264) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 3.68<br>(0.145) | 3.94<br>(0.155) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM150/33 | 8.00<br>(0.315) | 9.50<br>(0.374) | 3.00<br>(0.118) | 6.71<br>(0.264) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 3.68<br>(0.145) | 3.94<br>(0.155) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM185/33 | 8.00<br>(0.315) | 9.50<br>(0.374) | 3.00<br>(0.118) | 6.71<br>(0.264) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 3.68<br>(0.145) | 3.94<br>(0.155) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM200    | 8.00<br>(0.315) | 9.50<br>(0.374) | 3.00<br>(0.118) | 6.71<br>(0.264) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 3.68<br>(0.145) | 3.94<br>(0.155) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM250    | 8.00<br>(0.315) | 9.50<br>(0.374) | 3.00<br>(0.118) | 6.71<br>(0.264) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 3.68<br>(0.145) | 3.94<br>(0.155) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |
| MF-SM260    | 6.73<br>(0.265) | 7.98<br>(0.314) | 3.00<br>(0.118) | 5.44<br>(0.214) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.56<br>(0.022) | 0.71<br>(0.028) | 2.16<br>(0.085) | 2.41<br>(0.095) | 0.66<br>(0.026) | 1.37<br>(0.054) | 0.43<br>(0.017) |


Packaging:

TAPE & REEL: MF-SM030, 050, 075, 100, 100/33, 125, 260 = 2000 pcs. per reel;  
MF-SM150, 150/33, 185/33, 200, 250 = 1500 pcs. per reel.

UNIT =  $\frac{\text{MM}}{\text{(INCHES)}}$




Terminal material:  
Tin-plated brass



## Typical Part Marking

Represents total content. Layout may vary.

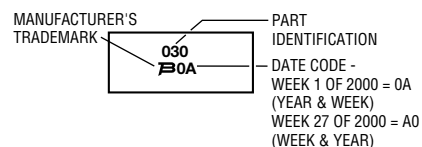

## How to Order

**MF - SM 100/33 - 2 - 99**

Multifuse® Product Designator

Series SM = Surface Mount Component

Hold Current, I<sub>hold</sub>/V<sub>max</sub>\*  
030 - 260 (0.3 - 2.6 Amps)


Packaging Options  
- 2 = Tape and Reel\*\*

Lead Free Option  
- \_\_ = Standard Product  
- 99 = Lead Free


\*V<sub>max</sub> entry applies only to models MF-SM100/33, MF-SM150/33 & MF-SM185/33.

\*\*Packaged per EIA-481-2

## Recommended Pad Layout MF-SM030, 050, 075, 100, 100/33, 125, 260

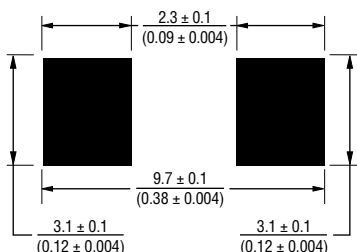

## Recommended Pad Layout MF-SM150, 150/33, 185/33, 200, 250

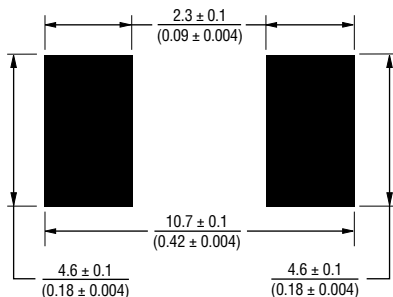


Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.


## MF-SM Series - PTC Resettable Fuses

**BOURNS®**

### Typical Time to Trip at 23 °C

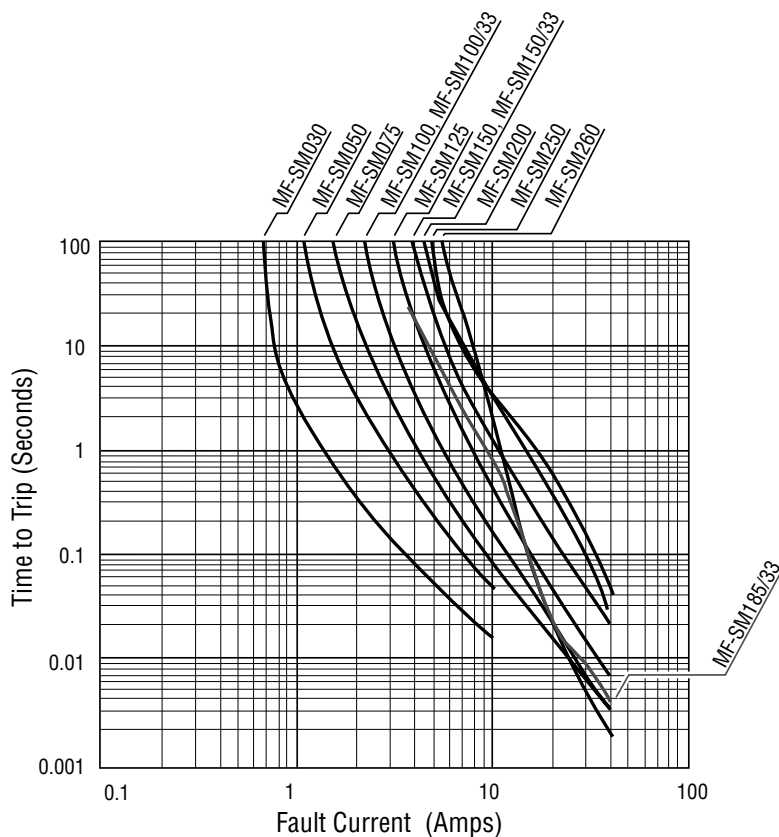

### Solder Reflow Recommendations

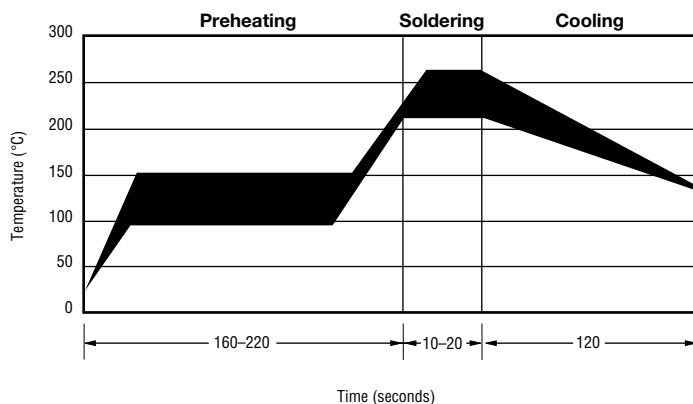

#### Solder reflow

- Recommended reflow methods: IR, vapor phase oven, hot air oven.
- Devices are not designed to be wave soldered to the bottom side of the board.
- Gluing the devices is not recommended.
- Recommended maximum paste thickness is 0.25 mm (.010 inch).
- Devices can be cleaned using standard industry methods and solvents.

#### Note:

- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

#### Rework

- A device should not be reworked.

# MF-SM, MF-SM/33 & MF-SM/250 Series Tape and Reel Specifications

**BOURNS®**

**MF-SM030, 050, 075, 100, 125, 260;  
MF-SM-100/33  
per EIA-481-2**

**MF-SM150, 200, 250;  
MF-SM-150/33; MF-SM185/33; MF-SM013/250  
per EIA 481-2**

## Tape Dimensions



|                     |                                                 |                                                 |
|---------------------|-------------------------------------------------|-------------------------------------------------|
| W                   | $\frac{16.0 \pm 0.3}{(0.630 \pm 0.012)}$        | $\frac{16.0 \pm 0.3}{(0.630 \pm 0.012)}$        |
| P <sub>0</sub>      | $\frac{4.0 \pm 0.1}{(0.157 \pm 0.004)}$         | $\frac{4.0 \pm 0.1}{(0.157 \pm 0.004)}$         |
| P <sub>1</sub>      | $\frac{8.0 \pm 0.1}{(0.315 \pm 0.004)}$         | $\frac{12.0 \pm 0.1}{(0.472 \pm 0.004)}$        |
| P <sub>2</sub>      | $\frac{2.0 \pm 0.1}{(0.079 \pm 0.004)}$         | $\frac{2.0 \pm 0.1}{(0.079 \pm 0.004)}$         |
| A <sub>0</sub>      | $\frac{5.7 \pm 0.1}{(0.224 \pm 0.004)}$         | $\frac{6.9 \pm 0.1}{(0.272 \pm 0.004)}$         |
| B <sub>0</sub>      | $\frac{8.1 \pm 0.1}{(0.319 \pm 0.004)}$         | $\frac{9.6 \pm 0.1}{(0.378 \pm 0.004)}$         |
| B <sub>1</sub> max. | $\frac{12.1}{(0.476)}$                          | $\frac{12.1}{(0.476)}$                          |
| D <sub>0</sub>      | $\frac{1.5 \pm 0.1/-0.0}{(0.059 \pm 0.004/-0)}$ | $\frac{1.5 \pm 0.1/-0.0}{(0.059 \pm 0.004/-0)}$ |
| F                   | $\frac{7.5 \pm 0.1}{(0.295 \pm 0.004)}$         | $\frac{7.5 \pm 0.1}{(0.295 \pm 0.004)}$         |
| E <sub>1</sub>      | $\frac{1.75 \pm 0.1}{(0.069 \pm 0.004)}$        | $\frac{1.75 \pm 0.1}{(0.069 \pm 0.004)}$        |
| E <sub>2</sub> min. | $\frac{14.25}{(0.561)}$                         | $\frac{14.25}{(0.561)}$                         |
| T max.              | $\frac{0.6}{(0.024)}$                           | $\frac{0.6}{(0.024)}$                           |
| T <sub>1</sub> max. | $\frac{0.1}{(0.004)}$                           | $\frac{0.1}{(0.004)}$                           |
| K <sub>0</sub>      | $\frac{3.4 \pm 0.1}{(0.134 \pm 0.004)}$         | $\frac{3.4 \pm 0.1^*}{(0.134 \pm 0.004)^*}$     |
| Leader min.         | $\frac{390}{(15.35)}$                           | $\frac{390}{(15.35)}$                           |
| Trailer min.        | $\frac{160}{(6.30)}$                            | $\frac{160}{(6.30)}$                            |

## Reel Dimensions

|                     |                                                  |                                                  |
|---------------------|--------------------------------------------------|--------------------------------------------------|
| A max.              | $\frac{360}{(14.17)}$                            | $\frac{360}{(14.17)}$                            |
| N min.              | $\frac{50}{(1.97)}$                              | $\frac{50}{(1.97)}$                              |
| W <sub>1</sub>      | $\frac{16.4 \pm 2.0/-0.0}{(0.646 \pm 0.079/-0)}$ | $\frac{16.4 \pm 2.0/-0.0}{(0.646 \pm 0.079/-0)}$ |
| W <sub>2</sub> max. | $\frac{22.4}{(0.882)}$                           | $\frac{22.4}{(0.882)}$                           |

\* Model MF-SM013/250 =  $\frac{3.8 \pm 0.1}{(0.150 \pm 0.004)}$

UNIT =  $\frac{\text{MM}}{(\text{INCHES})}$

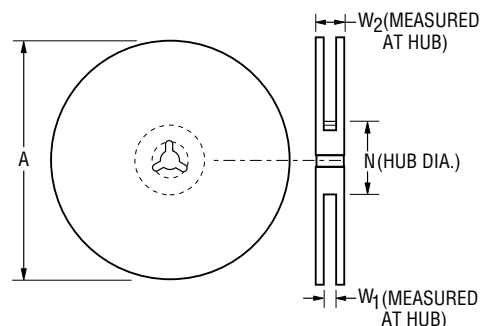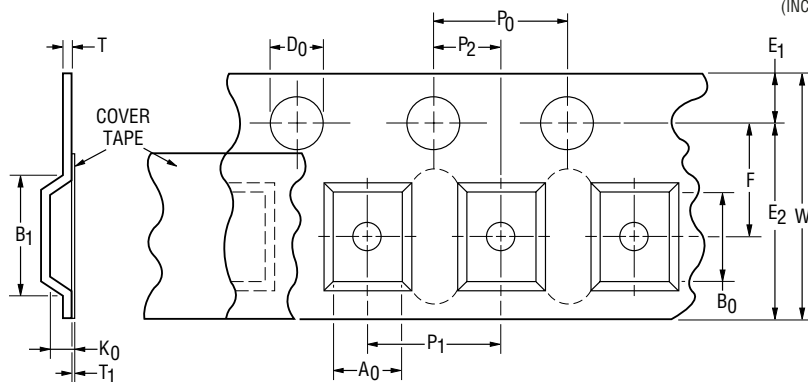

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.