查询MG25Q6ES50A供应商 捷多邦，专业PCB打样工厂，24小时加急出货

TOSHIBA GTR MODULE SILICON N CHANNEL IGBT

MG25Q6ES50A

HIGH POWER SWITCHING APPLICATIONS

MOTOR CONTROL APPLICATIONS

- The Electrodes are Isolated from Case.
- High Input Impedance.
- 6 IGBTs Built Into 1 Package.

Unit in mm

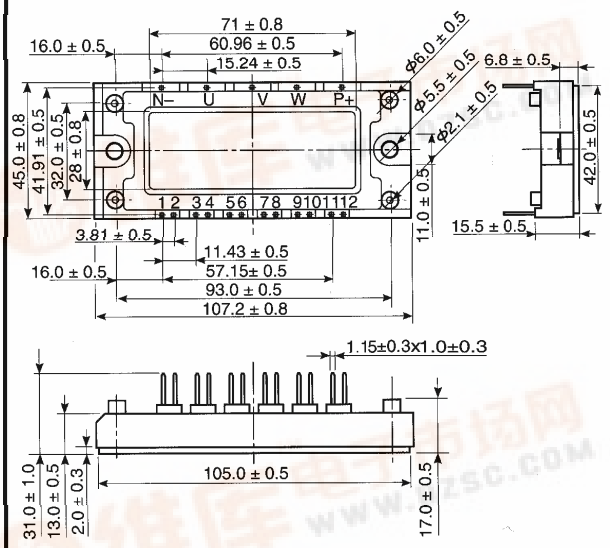

JEDEC	—
EIAJ	—
TOSHIBA	2-108E2A

Weight : 185g

EQUIVALENT CIRCUIT

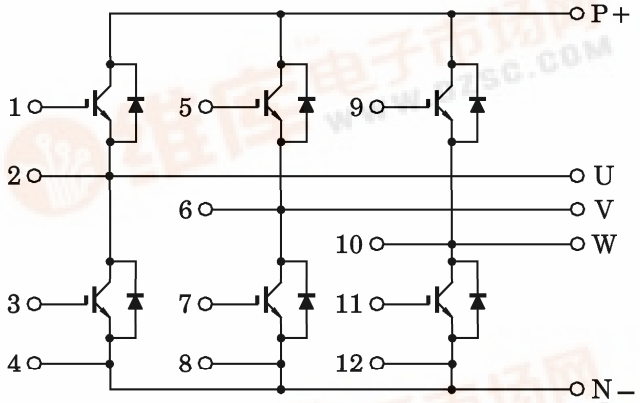

961001EAA1

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
● The information contained herein is subject to change without notice.

找PDF 维库一下 pdf.dzsc.com

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Emitter Voltage		V_{CES}	1200	V
Gate-Emitter Voltage		V_{GES}	±20	V
Collector Current	DC	I_C (25°C / 80°C)	35 / 25	A
	1ms	I_{CP} (25°C / 80°C)	70 / 50	A
Forward Current	DC	I_F	25	A
	1ms	I_{FM}	50	A
Collector Power Dissipation (Tc = 25°C)		P_C	200	W
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	−40~125	°C
Isolation Voltage		V_{Isol}	2500 (AC 1 minute)	V
Screw Torque		—	6	N·m

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GES}	V_{GE} = ±20V, V_{CE} = 0		—	—	±500	nA
Collector Cut-Off Current		I_{CES}	V_{CE} = 1200V, V_{GE} = 0		—	—	0.5	mA
Gate-Emitter Cut-Off Voltage		$V_{GE\ (off)}$	I_C = 25mA, V_{CE} = 5V		3.0	—	6.0	V
Collector-Emitter Saturation Voltage		$V_{CE\ (sat)}$	I_C = 25A, V_{GE} = 15V	T_j = 25°C	—	2.8	3.2	V
				T_j = 125°C	—	3.1	3.7	
Input Capacitance		C_{ies}	V_{CE} = 10V, V_{GE} = 0, f = 1MHz		—	2600	—	pF
Switching Time	Rise Time	t_r	V_{CC} = 600V, I_C = 25A, V_{GE} = ±15V, R_G = 51Ω, T_j = 125°C (Note 1)		—	0.07	0.15	μs
	Turn-On Time	t_{on}			—	0.15	0.30	
	Fall Time	t_f			—	0.07	0.10	
	Turn-Off Time	t_{off}			—	0.60	0.90	
Forward Voltage		V_F	I_F = 25A, V_{GE} = 0		—	2.0	2.8	V
Reverse Recovery Time		t_{rr}	I_F = 25A, V_{GE} = −10V, di / dt = 400A / μs (Note 1)		—	0.10	0.25	μs
Thermal Resistance		$R_{th\ (j-c)}$	Transistor Stage		—	—	0.6	°C / W
			Diode Stage		—	—	1.0	

(Note 1) Switching Time and Reverse Recovery Time Test Circuit & Timing Chart

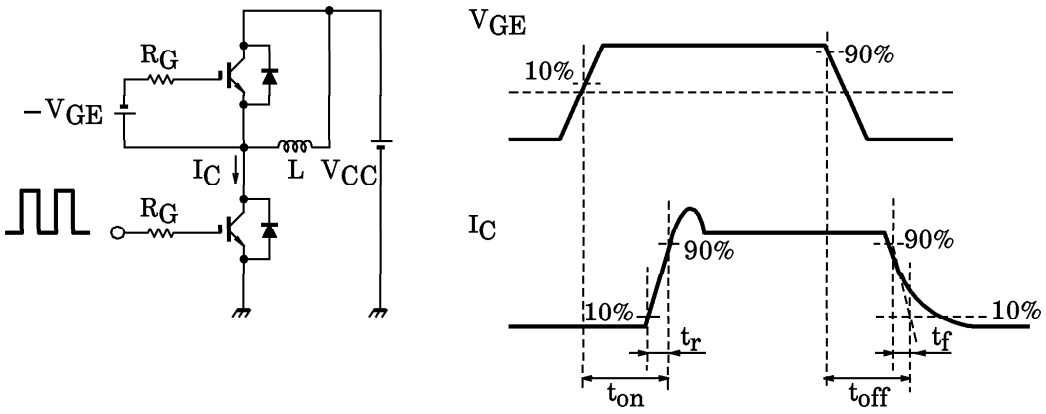

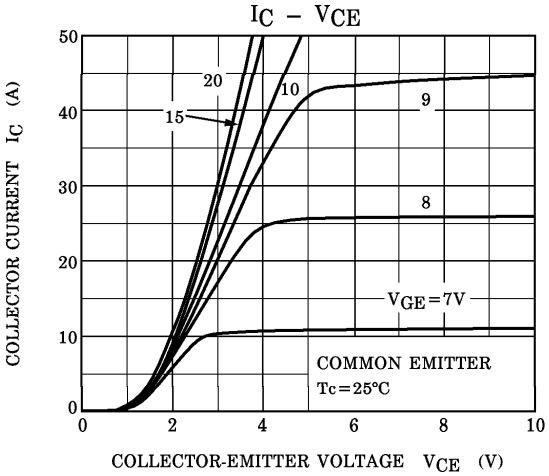
IC – VCE
COLLECTOR CURRENT IC (A)
COLLECTOR-EMITTER VOLTAGE VCE (V)
20
15
10
9
8
VGE=7V
COMMON EMITTER
Tc=25°C

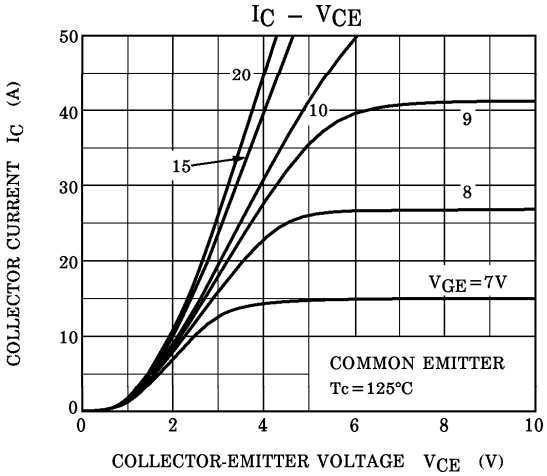
IC – VCE
COLLECTOR CURRENT IC (A)
COLLECTOR-EMITTER VOLTAGE VCE (V)
20
15
10
9
8
VGE=7V
COMMON EMITTER
Tc=125°C

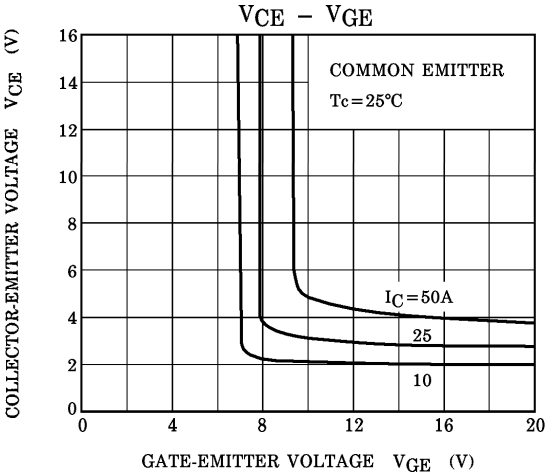
VCE – VGE
COLLECTOR-EMITTER VOLTAGE VCE (V)
GATE-EMITTER VOLTAGE VGE (V)
COMMON EMITTER
Tc=25°C
IC=50A
25
10

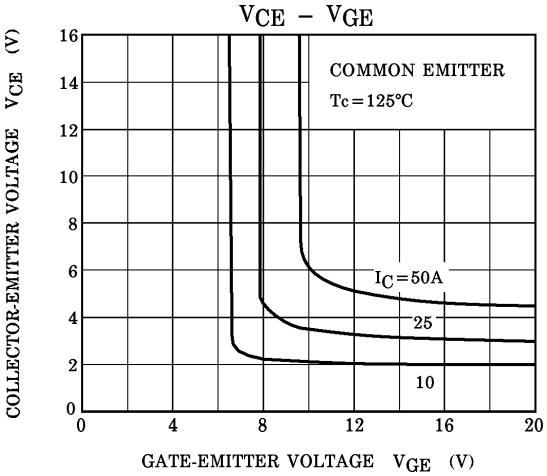
VCE – VGE
COLLECTOR-EMITTER VOLTAGE VCE (V)
GATE-EMITTER VOLTAGE VGE (V)
COMMON EMITTER
Tc=125°C
IC=50A
25
10

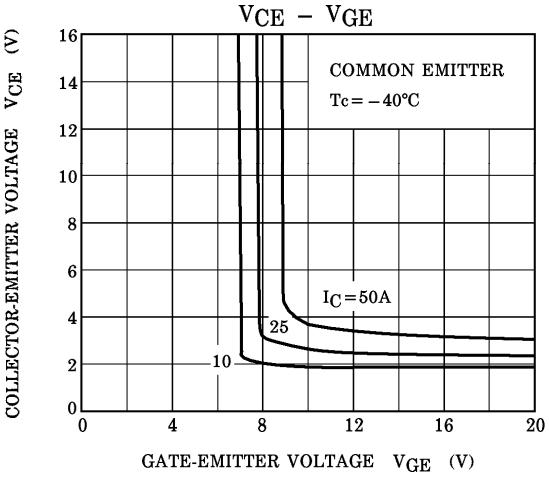
VCE – VGE
COLLECTOR-EMITTER VOLTAGE VCE (V)
GATE-EMITTER VOLTAGE VGE (V)
COMMON EMITTER
Tc=–40°C
IC=50A
25
10

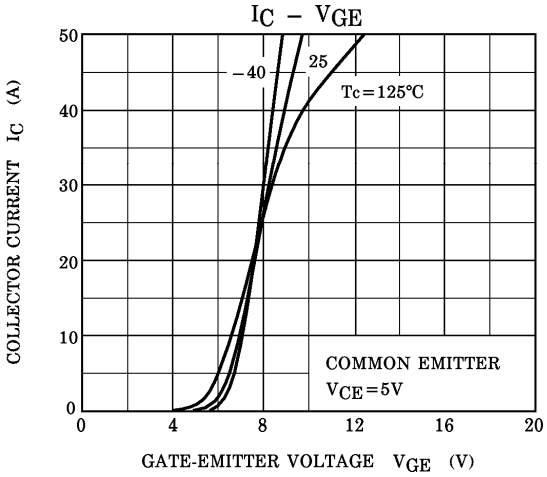
IC – VGE
COLLECTOR CURRENT IC (A)
GATE-EMITTER VOLTAGE VGE (V)
–40
25
Tc=125°C
COMMON EMITTER
VCE=5V

SWITCHING TIME – I_C

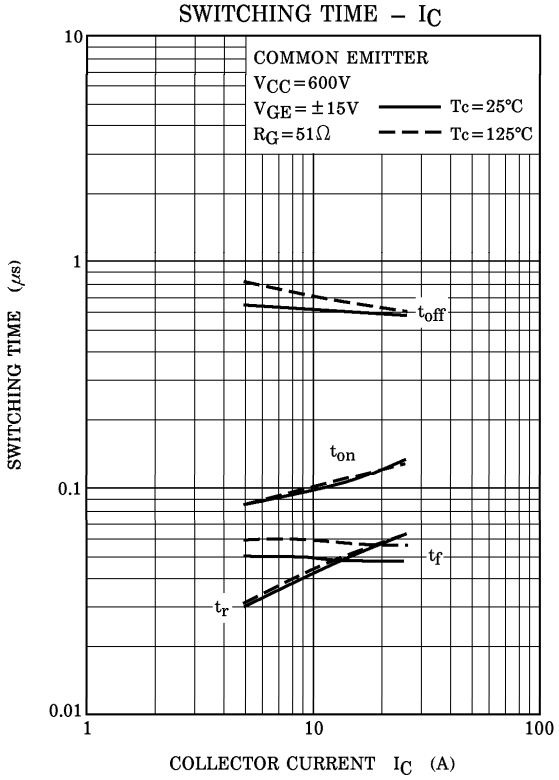

SWITCHING TIME – R_G

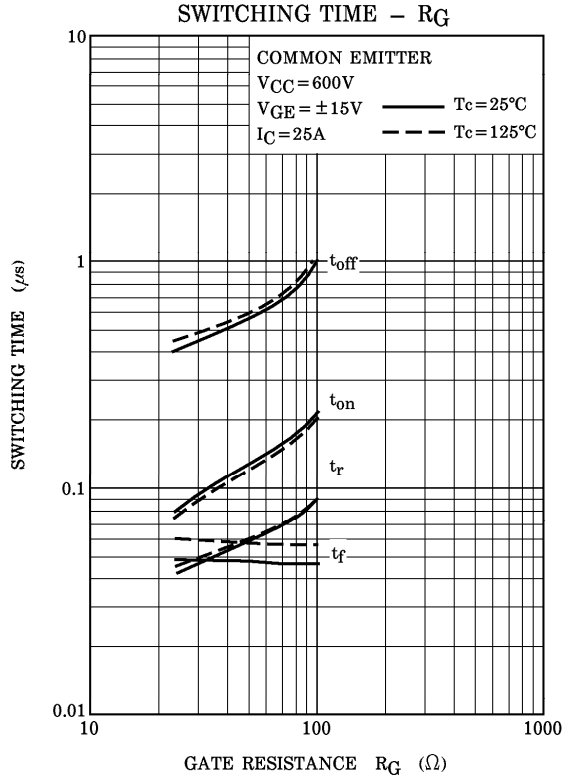

SWITCHING LOSS – I_C

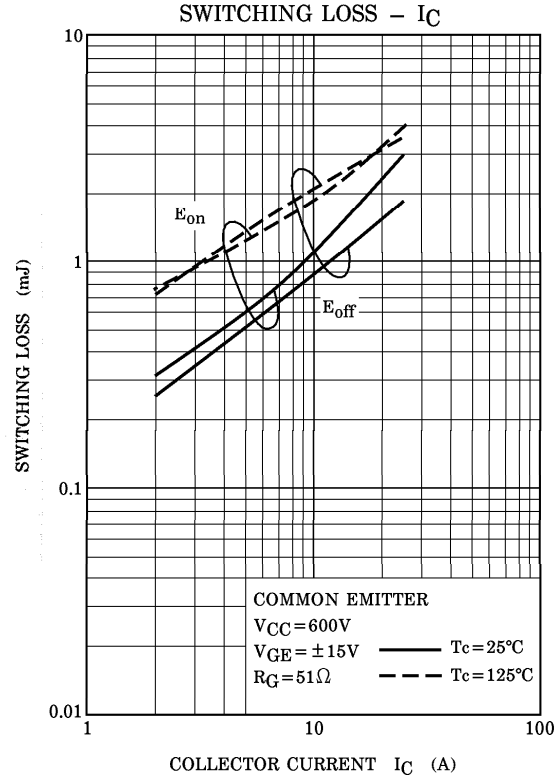

SWITCHING LOSS – R_G

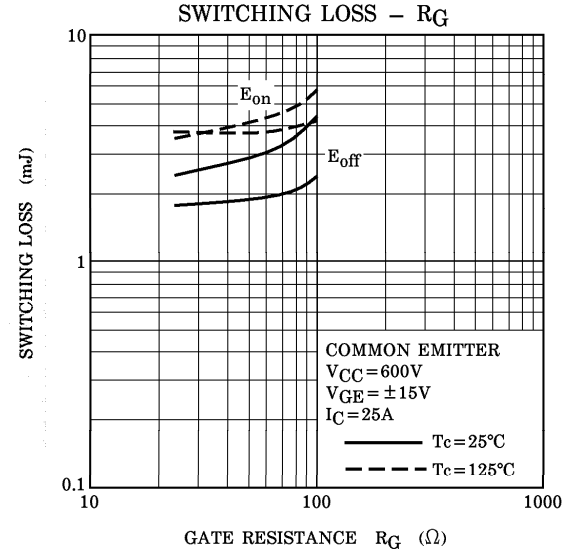

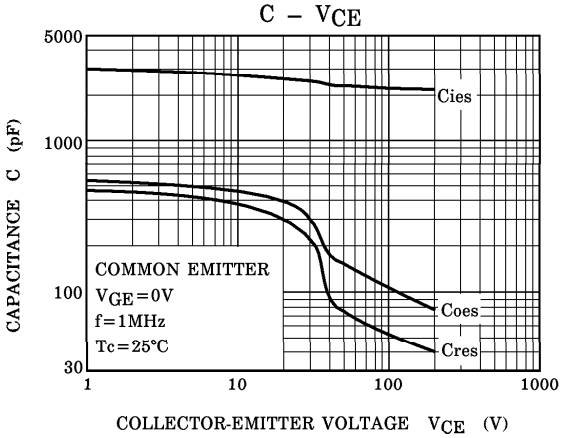
C – VCE
CAPACITANCE C (pF)
COLLECTOR-EMITTER VOLTAGE VCE (V)
Cies
Coes
Cres
COMMON EMITTER
VGE=0V
f=1MHz
Tc=25°C

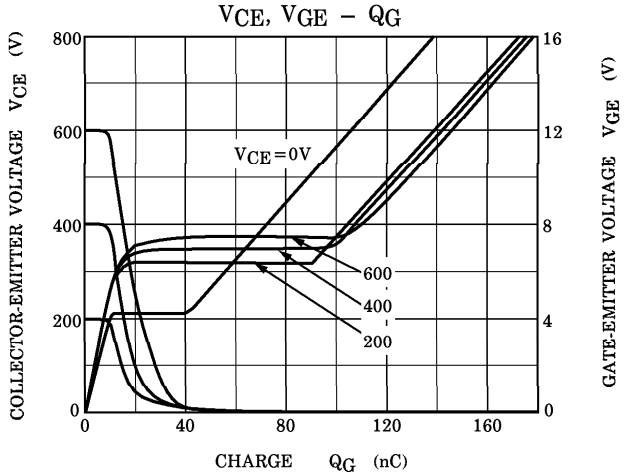
VCE, VGE – QG
COLLECTOR-EMITTER VOLTAGE VCE (V)
GATE-EMITTER VOLTAGE VGE (V)
CHARGE QG (nC)
VCE=0V
600
400
200

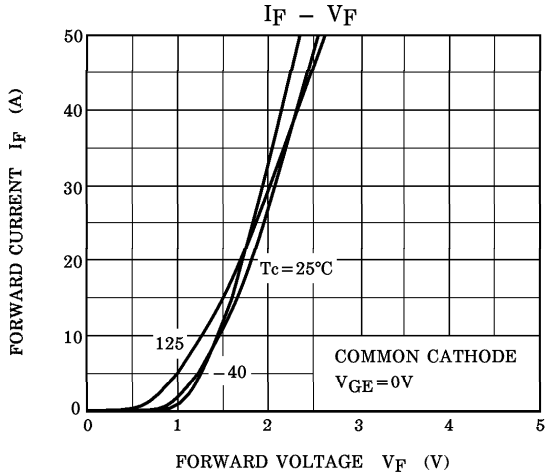
IF – VF
FORWARD CURRENT IF (A)
FORWARD VOLTAGE VF (V)
Tc=25°C
125
–40
COMMON CATHOLE
VGE=0V

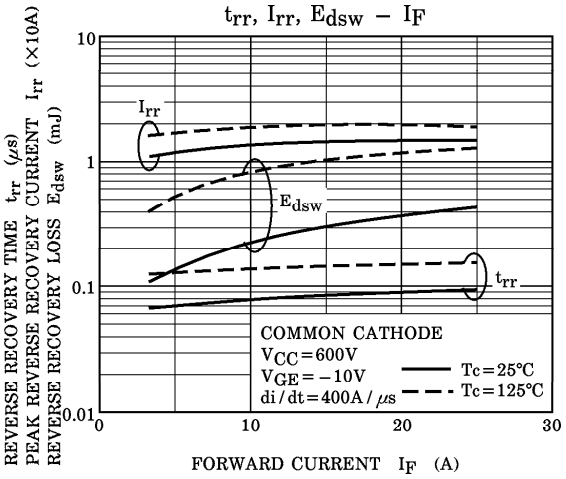
trr, Irr, Edsw – IF
REVERSE RECOVERY TIME trr (μs)
PEAK REVERSE RECOVERY CURRENT Irr (×10A)
REVERSE RECOVERY LOSS Edsw (mJ)
FORWARD CURRENT IF (A)
Irr
Edsw
trr
COMMON CATHODE
VCC=600V
VGE=–10V
di/dt=400A/μs
Tc=25°C
Tc=125°C

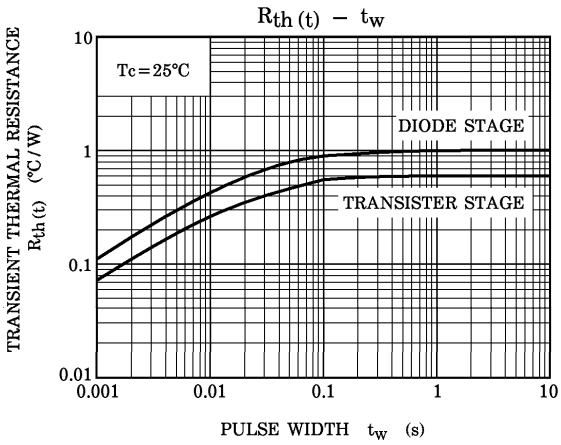
Rth (t) – tw
TRANSIENT THERMAL RESISTANCE Rth(t) (°C/W)
PULSE WIDTH tw (s)
Tc=25°C
DIODE STAGE
TRANSISTER STAGE

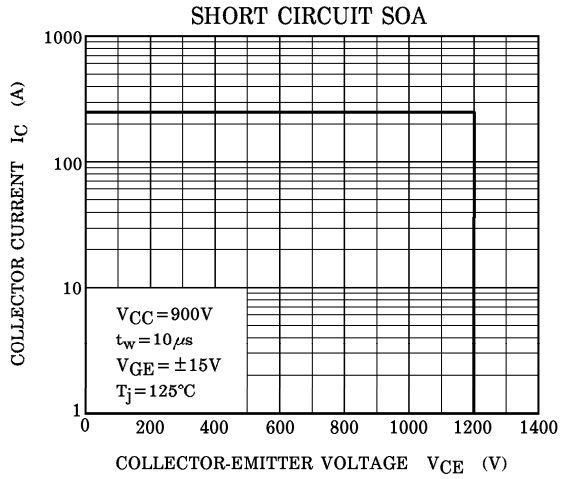
SHORT CIRCUIT SOA
COLLECTOR CURRENT IC (A)
COLLECTOR-EMITTER VOLTAGE VCE (V)
VCC=900V
tw=10μs
VGE=±15V
Tj=125°C

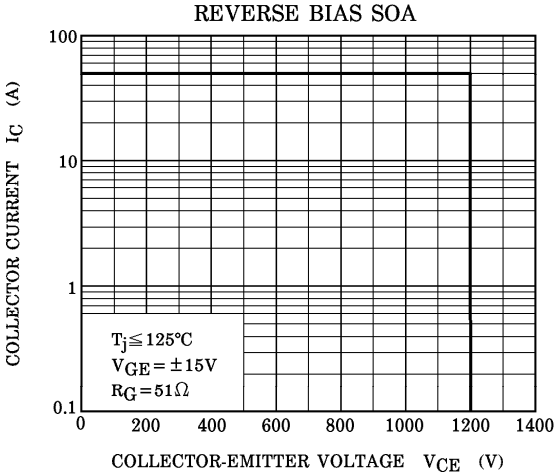
REVERSE BIAS SOA
COLLECTOR CURRENT I_C (A)
100
10
1
0.1
$T_j \leq 125°C$
$V_{GE} = \pm 15V$
$R_G = 51\Omega$
0
200
400
600
800
1000
1200
1400
COLLECTOR-EMITTER VOLTAGE V_{CE} (V)