



# MJ15026


# NPN PLANAR SILICON TRANSISTOR

## AUDIO POWER AMPLIFIER DC TO DC CONVERTER

- High Current Capability
- High Power Dissipation
- Complementary to MJ15027

### ABSOLUTE MAXIMUM RATING (Ta=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	VCBO	200	V
Collector-Emitter Voltage	VCEO	200	V
Emitter-Base voltage	VEBO	7	V
Collector Current (DC)	IC	16	A
Collector Dissipation	PC	250	W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-50~150	°C

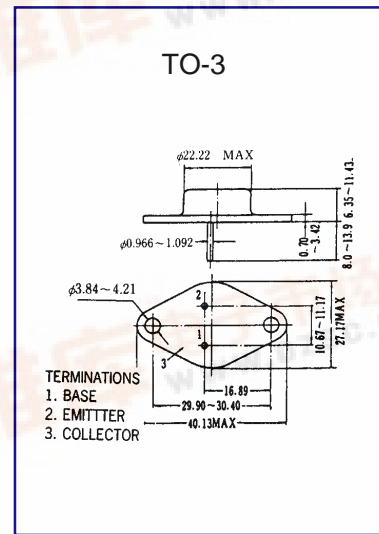

### ELECTRICAL CHARACTERISTICS (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Base Breakdown Voltage	BVCBO	IC=10 mA IE=0	200			V
Collector Emitter Breakdown Voltage	BVCEO	IC=5 mA RBE=	200			V
Emitter Base Breakdown Voltage	BVEBO	IE=5 mA IC=0	7			V
Collector Cutoff Current	ICBO	VCB=100V IE=0			0.1	mA
Emitter Cutoff Current	IEBO	VEB=5V IC=0			0.1	mA
*DC Current Gain	hFE1	VCE=5V IC=1A	50		150	
DC Current Gain	hFE2	VCE=5V IC=5A	25			
Collector- Emitter Saturation Voltage	VCE(sat)	IC=10A IB=1A			2.0	V

Wing Shing Computer Components Co., (H.K.) Ltd.  
Homepage: <http://www.wingshing.com>

Tel:(852)2341 9276 Fax:(852)2797 8153  
E-mail: [wscltd@hkstar.com](mailto:wscltd@hkstar.com)

