

# OKI Semiconductor

## ML9050/9051

### 132-Channel LCD Driver with Built-in RAM for LCD Dot Matrix Displays

#### GENERAL DESCRIPTION

The ML9050/9051 is an LSI for dot matrix graphic LCD devices carrying out bit map display. This LSI can drive a dot matrix graphic LCD display panel under the control of an 8-bit microcomputer. Since all the functions necessary for driving a bit map type LCD device are incorporated in a single chip, using the ML9050/9051 makes it possible to realize a bit map type dot matrix graphic LCD display system with only a few chips.

Since the bit map method in which one bit of display RAM data turns ON or OFF one dot in the display panel, it is possible to carry out displays with a high degree of freedom such as Chinese character displays, etc. With one chip, it is possible to construct a graphic display system with a maximum of  $132 \times 65$  dots. The display can be expanded further using two chips.

The ML9050/9051 is made using a CMOS process. Because it has a built-in RAM, low power consumption is one of its features, and is therefore suitable for displays in battery-operated portable equipment.

The ML9050 has 65 common signal outputs and 132 segment signal outputs and one chip can drive a display of up to  $65 \times 132$  dots.

The ML9051 has 49 common signal outputs and 132 segment signal outputs and one chip can drive a display of up to  $49 \times 132$  dots.


This device is not resistant to radiation or to light.

#### FEATURES

- Direct display of the RAM data using the bit map method  
Display RAM data "1" ... Dot is displayed  
Display RAM data "0" ... Dot is not displayed
- Display RAM capacity  
ML9050/9051:  $65 \times 132 = 8580$  dots
- LCD Drive circuits  
ML9050: 65 common outputs, 132 segment outputs  
ML9051: 49 common outputs, 132 segment outputs
- Microcomputer interface: Can select an 8-Bit parallel or serial interface
- Built-in voltage multiplier circuit for the LCD drive power supply
- Built-in LCD drive power supply adjustment circuit
- Built-in LCD drive bias resistors
- Line reversal drive/frame reversal drive (selected by a command)
- Built-in oscillator circuit (Internal RC oscillator/external clock input)
- A variety of commands  
Read/write of display data, display ON/OFF, normal/reverse display, all dots ON/all dots OFF, set page address, set display start address, etc.
- Power supply voltage  
Logic power supply:  $V_{DD}-V_{SS} = 1.8 \text{ V to } 5.5 \text{ V}$   
Voltage multiplier reference voltage:  $V_{IN}-V_{SS} = 1.8 \text{ V to } V_{DD}$   
5-times multiplier  $\rightarrow 1.8 \text{ V to } 3.6 \text{ V}$ , 6-times multiplier  $\rightarrow 1.8 \text{ to } 3 \text{ V}$ , 7-times multiplier  $\rightarrow 1.8$  to 2.5 V)  
LCD Drive voltage:  $V_{BI}-V_{SS} = 6.0 \text{ to } 18 \text{ V}$



## BLOCK DIAGRAM

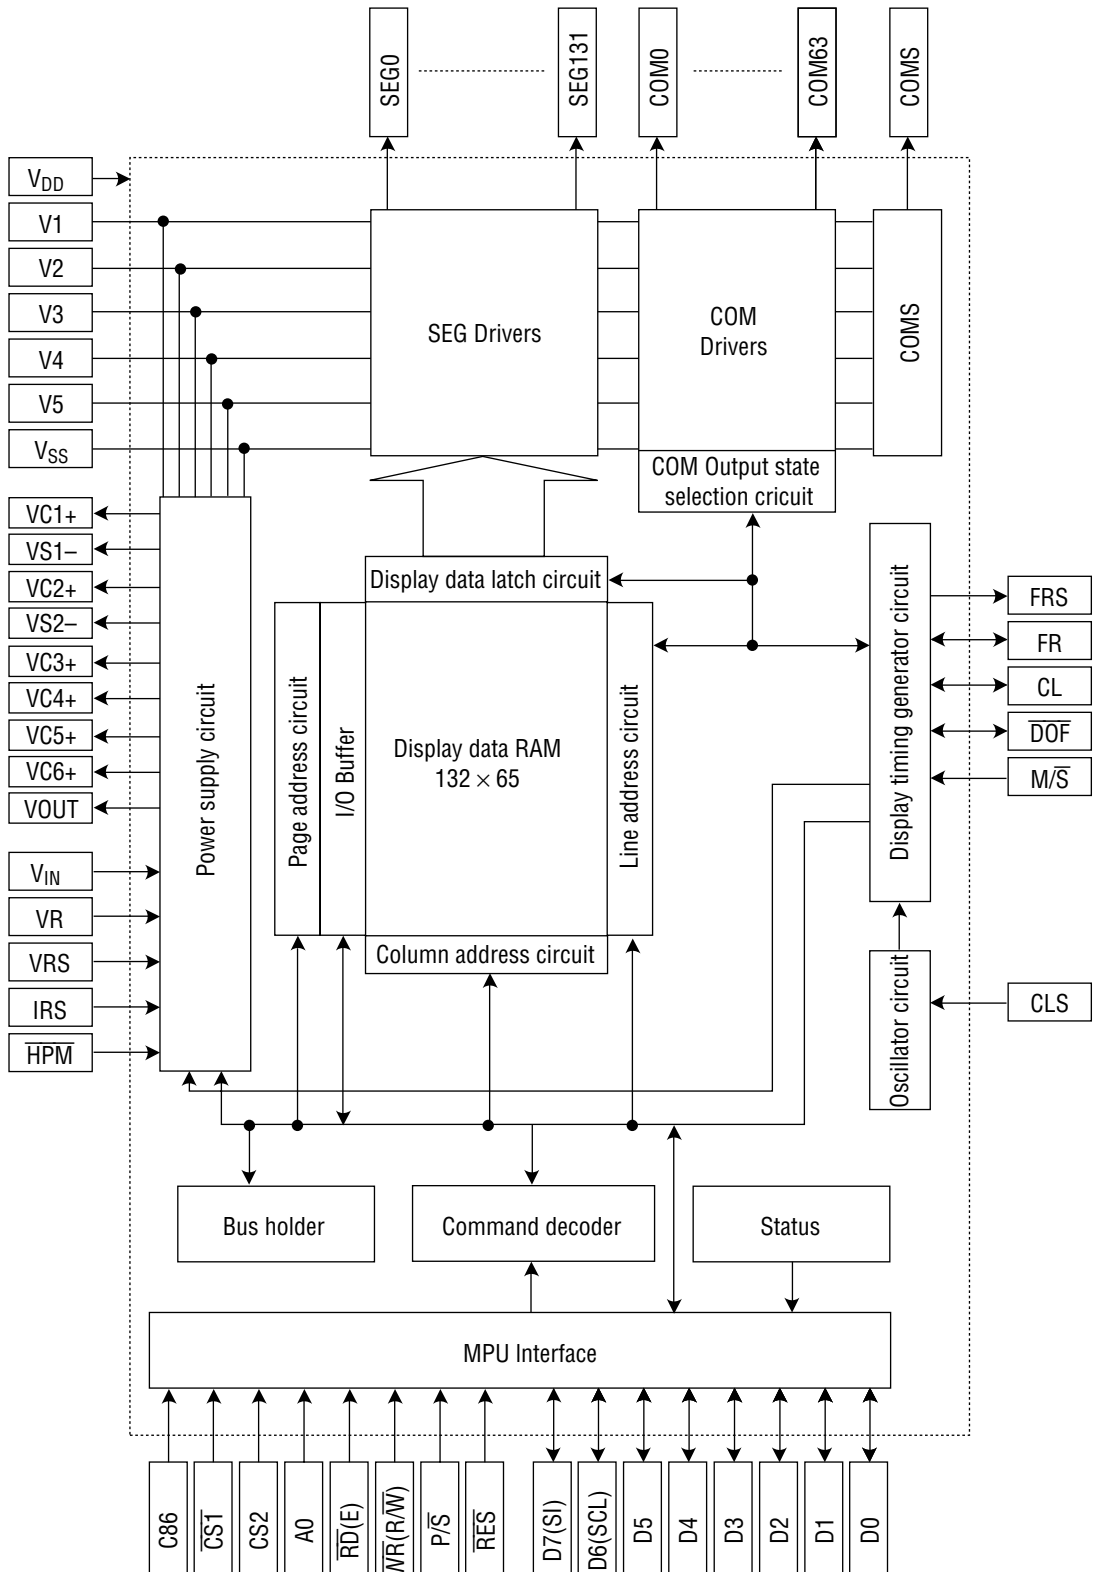

## PIN DESCRIPTION

| Function      | Pin name                                | Number of pins | I/O | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------|-----------------------------------------|----------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MPU Interface | D0 to D7                                | 8              | I/O | This is an 8-bit bi-directional data bus that can be connected to an 8-bit or 16-bit standard MPU data bus. When a serial interface is selected ( $\overline{P/S}$ = "L"): <p>D7: Serial data input pin (SI)</p> <p>D6: Serial clock input pin (SCL)</p> <p>In this case, D0 to D5 will be in the Hi-Z state. D0 to D7 will all be in the Hi-Z state when the chip select is in the inactive state.</p>                                                              |
|               | A0                                      | 1              | I   | Normally, the lowest bit of the MPU address bus is connected and used for distinguishing between data and commands. <p>A0 = "H": Indicates that D0 to D7 is display data.</p> <p>A1 = "L": Indicates that D0 to D7 is control data.</p>                                                                                                                                                                                                                              |
|               | $\overline{RES}$                        | 1              | I   | Initial setting is made by making $\overline{RES}$ = "L". The reset operation is made during the active level of the RES signal.                                                                                                                                                                                                                                                                                                                                     |
|               | $\overline{CS1}$<br>CS2                 | 2              | I   | These are the chip select signals. The Chip Select of the LSI becomes active when $\overline{CS1}$ is "L" and also CS2 is "H" and allows the input/output of data or commands.                                                                                                                                                                                                                                                                                       |
|               | $\overline{RD}$<br>(E)                  | 1              | I   | The active level of this signal is "L" when connected to an 80-series MPU. This terminal is connected to the $\overline{RD}$ signal of the 80-series MPU, and the data bus of the ML9050/9051 goes into the output state when this signal is "L". <p>The active level of this signal is "H" when connected to a 68-series MPU. This pin will be the Enable and clock input pin when connected to a 68-series MPU.</p>                                                |
|               | $\overline{WR}$<br>(R/ $\overline{W}$ ) | 1              | I   | The active level of this signal is "L" when connected to an 80-series MPU. This terminal is connected to the $\overline{WR}$ signal of the 80-series MPU. The data on the data bus is latched into the ML9052 at the rising edge of the $\overline{WR}$ signal. <p>When connected to a 68-series MPU, this pin becomes the input pin for the Read/Write control signal.</p> <p><math>R/\overline{W}</math> = "H": Read, <math>R/\overline{W}</math> = "L": Write</p> |
|               | C86                                     | 1              | I   | This is the pin for selecting the MPU interface type. <p>C86 = "H": 68-Series MPU interface.</p> <p>C86 = "L": 80-Series MPU interface.</p>                                                                                                                                                                                                                                                                                                                          |

| Function                                                                                                                                                                                                                                                        | Pin name         | Number of pins | I/O        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------------|-----------------------------------|----------------------|--------------|--------|------------------|------------------|-----------------------------------|----------|---------|---------|---------|------------|--------|--------|-----|----------|---------|-------|--------|--------|--------|-----|-----|----------|----------|-------|-------|--------|-------|-----|----------|----------|-------|-------|--------|-------|
| MPU Interface                                                                                                                                                                                                                                                   | $P/\overline{S}$ | 1              | I          | This is the pin for selecting parallel data input or serial data input.<br>$P/\overline{S}$ = "H": Parallel data input.<br>$P/\overline{S}$ = "L": Serial data input.<br>The pins of the LSI have the following functions depending on the state of $P/\overline{S}$ input.                                                                                                                                                                                                                                                                                                                                                                                                                                              |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 |                  |                |            | <table><tr><th><math>P/\overline{S}</math></th><th>Data/command</th><th>Data</th><th>Read/Write</th><th>Serial clock</th></tr><tr><td>"H"</td><td>A0</td><td>D0 to D7</td><td><math>\overline{RD}</math>, <math>\overline{WR}</math></td><td rowspan="2">SCL (D6)</td></tr><tr><td>"L"</td><td>A0</td><td>SI (D7)</td><td>Write only</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                   | $P/\overline{S}$ | Data/command       | Data                              | Read/Write           | Serial clock | "H"    | A0               | D0 to D7         | $\overline{RD}$ , $\overline{WR}$ | SCL (D6) | "L"     | A0      | SI (D7) | Write only |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 |                  |                |            | $P/\overline{S}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Data/command     | Data               | Read/Write                        | Serial clock         |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 |                  |                |            | "H"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | A0               | D0 to D7           | $\overline{RD}$ , $\overline{WR}$ | SCL (D6)             |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
| "L"                                                                                                                                                                                                                                                             | A0               | SI (D7)        | Write only |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
| When $P/\overline{S}$ is "L", D0 to D5 will go into the Hi-Z state. In this condition, the data on the lines D0 to D5 can be "H", "L", or open. The pins $\overline{RD}$ (E) and $\overline{WR}$ (R/W) should be tied to either the "H" level or the "L" level. |                  |                |            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
| During serial data input, it is not possible to read the display data in the RAM.                                                                                                                                                                               |                  |                |            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
| Oscillator circuit                                                                                                                                                                                                                                              | CLS              | 1              | I          | This is the pin for selecting whether to enable or disable the internal oscillator circuit for the display clock.<br>CLS = "H": The internal oscillator circuit is enabled.<br>CLS = "L": The internal oscillator circuit is disabled (External input).<br>When CLS = "L", the display clock is input at the pin CL.                                                                                                                                                                                                                                                                                                                                                                                                     |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
| Display timing generator circuit                                                                                                                                                                                                                                | $M/\overline{S}$ | 1              | I          | This is the pin for selecting whether master operation or slave operation is made towards the ML9050/9051. During master operation, the synchronization with the LCD display system is achieved by inputting the timing signals necessary for LCD display.<br>$M/\overline{S}$ = "H": Master operation<br>$M/\overline{S}$ = "L": Slave operation<br>The functions of the different circuits and pins will be as follows depending on the states of $M/\overline{S}$ and CLS signals.                                                                                                                                                                                                                                    |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 |                  |                |            | <table><tr><th><math>M/\overline{S}</math></th><th>CLS</th><th>Oscillator circuit</th><th>Power supply circuit</th><th>CL</th><th>FR</th><th>FRS</th><th><math>\overline{DOF}</math></th></tr><tr><td rowspan="2">"H"</td><td>"H"</td><td>Enabled</td><td>Enabled</td><td>Output</td><td>Output</td><td>Output</td><td>Output</td></tr><tr><td>"L"</td><td>Disabled</td><td>Enabled</td><td>Input</td><td>Output</td><td>Output</td><td>Output</td></tr><tr><td rowspan="2">"L"</td><td>"H"</td><td>Disabled</td><td>Disabled</td><td>Input</td><td>Input</td><td>Output</td><td>Input</td></tr><tr><td>"L"</td><td>Disabled</td><td>Disabled</td><td>Input</td><td>Input</td><td>Output</td><td>Input</td></tr></table> | $M/\overline{S}$ | CLS                | Oscillator circuit                | Power supply circuit | CL           | FR     | FRS              | $\overline{DOF}$ | "H"                               | "H"      | Enabled | Enabled | Output  | Output     | Output | Output | "L" | Disabled | Enabled | Input | Output | Output | Output | "L" | "H" | Disabled | Disabled | Input | Input | Output | Input | "L" | Disabled | Disabled | Input | Input | Output | Input |
|                                                                                                                                                                                                                                                                 |                  |                |            | $M/\overline{S}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | CLS              | Oscillator circuit | Power supply circuit              | CL                   | FR           | FRS    | $\overline{DOF}$ |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 |                  |                |            | "H"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | "H"              | Enabled            | Enabled                           | Output               | Output       | Output | Output           |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
| "L"                                                                                                                                                                                                                                                             | Disabled         | Enabled        | Input      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Output           | Output             | Output                            |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
| "L"                                                                                                                                                                                                                                                             | "H"              | Disabled       | Disabled   | Input                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Input            | Output             | Input                             |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 | "L"              | Disabled       | Disabled   | Input                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Input            | Output             | Input                             |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 |                  |                |            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |
|                                                                                                                                                                                                                                                                 |                  |                |            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |                    |                                   |                      |              |        |                  |                  |                                   |          |         |         |         |            |        |        |     |          |         |       |        |        |        |     |     |          |          |       |       |        |       |     |          |          |       |       |        |       |

| Function                         | Pin name         | Number of pins | I/O                                                                                                                                                                                                                                                                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|----------------------------------|------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----|----|-----|-----|--------|-----|-------|-----|-----|-------|-----|-------|
| Display timing generator circuit | CL               | 1              | I/O                                                                                                                                                                                                                                                                                                | <p>This is the display clock input/output pin.</p> <p>The function of this pin will be as follows depending on the states of <math>M/\overline{S}</math> and CLS signals.</p> <table border="1"><tr><td><math>M/\overline{S}</math></td><td>CLS</td><td>CL</td></tr><tr><td rowspan="2">"H"</td><td>"H"</td><td>Output</td></tr><tr><td>"L"</td><td>Input</td></tr><tr><td rowspan="2">"L"</td><td>"H"</td><td>Input</td></tr><tr><td>"L"</td><td>Input</td></tr></table> <p>When the ML9050/9051 is used in the master/slave mode, the corresponding CL pin has to be connected.</p> | $M/\overline{S}$ | CLS | CL | "H" | "H" | Output | "L" | Input | "L" | "H" | Input | "L" | Input |
|                                  | $M/\overline{S}$ | CLS            | CL                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|                                  | "H"              | "H"            | Output                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|                                  |                  | "L"            | Input                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|                                  | "L"              | "H"            | Input                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
| "L"                              |                  | Input          |                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
| FR                               | 1                | I/O            | <p>This is the input/output pin for LCD display frame reversal signal.</p> <p><math>M/\overline{S}</math> = "H": Output</p> <p><math>M/\overline{S}</math> = "L": Input</p> <p>When the ML9050/9051 is used in the master/slave mode, the corresponding FR pin has to be connected.</p>            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
| $\overline{DOF}$                 | 1                | I/O            | <p>This is the blanking control pin for the LCD display.</p> <p><math>M/\overline{S}</math> = "H": Output</p> <p><math>M/\overline{S}</math> = "L": Input</p> <p>When the ML9050/9051 is used in the master/slave mode, the corresponding <math>\overline{DOF}</math> pin has to be connected.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
| FRS                              | 1                | O              | <p>This is the output pin for static drive.</p> <p>This pin is used in combination with the FR pin.</p>                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |    |     |     |        |     |       |     |     |       |     |       |
| Power supply circuit             | IRS              | 1              | I                                                                                                                                                                                                                                                                                                  | <p>This is the pin for selecting the resistor for adjusting the voltage V1.</p> <p>IRS = "H": The internal resistor is used.</p> <p>IRS = "L": The internal resistor is not used. The voltage V1 is adjusted using the external potential divider resistors connected to the pins VR.</p> <p>This pin is effective only in the master operation. This pin is tied to the "H" or the "L" level during slave operation.</p>                                                                                                                                                             |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|                                  | $\overline{HPM}$ | 1              | I                                                                                                                                                                                                                                                                                                  | <p>This is the power control pin for the LCD drive power supply circuit.</p> <p><math>\overline{HPM}</math> = "H": Normal mode</p> <p><math>\overline{HPM}</math> = "L": High power mode</p> <p>This pin is effective only during master operation mode. This pin is tied to the "H" or the "L" level during slave operation.</p>                                                                                                                                                                                                                                                     |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|                                  | V <sub>DD</sub>  | 13             | —                                                                                                                                                                                                                                                                                                  | This pin is tied to the MPU power supply terminal VCC.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|                                  | V <sub>SS</sub>  | 9              | —                                                                                                                                                                                                                                                                                                  | This is the 0 V pin connected to the system ground (GND).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                  |     |    |     |     |        |     |       |     |     |       |     |       |
|                                  | V <sub>IN</sub>  | 4              | —                                                                                                                                                                                                                                                                                                  | This is the reference power supply of the voltage multiplier circuit for driving the LCD.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                  |     |    |     |     |        |     |       |     |     |       |     |       |

| Function             | Pin name                   | Number of pins | I/O                                                                                                                                                                                                                                                                                                                                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
|----------------------|----------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--|--|----|----------|----------|----|----------|----------|----|----------|----------|----|----------|----------|--------|--|--|----|----------|----------|----|----------|----------|----|----------|----------|----|----------|----------|
| Power supply circuit | V <sub>RS</sub>            | 2              | —                                                                                                                                                                                                                                                                                                                                      | This is the external input VREG power supply for the LCD power supply voltage adjustment circuit.<br>(This pin should be left open when not used as an external input)<br>This pin is effective only in the case of optional devices with the VREG external input option.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
|                      | V <sub>OUT</sub>           | 2              | 0                                                                                                                                                                                                                                                                                                                                      | These are the output pins during voltage multiplication. Connect a capacitor between these pins and V <sub>SS</sub> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
|                      | V1<br>V2<br>V3<br>V4<br>V5 | 10             | —                                                                                                                                                                                                                                                                                                                                      | These are the multiple level power supply pins for the LCD power supply. The voltages specified for the LCD cells are applied to these pins after resistor network voltage division or after impedance transformation using operational amplifiers. The voltages are specified taking V <sub>SS</sub> as the reference, and the following relationship should be maintained among them.<br>V1 ≥ V2 ≥ V3 ≥ V4 ≥ V5 ≥ V <sub>SS</sub><br>Master operation: When the power supply is ON, the following voltages are applied to V2 to V5 from the built-in power supply circuit. The selection of voltages is determined by the LCD bias set command.<br><table border="1"><thead><tr><th colspan="3">ML9050</th></tr></thead><tbody><tr><td>V2</td><td>8/9 × V1</td><td>6/7 × V1</td></tr><tr><td>V3</td><td>7/9 × V1</td><td>5/7 × V1</td></tr><tr><td>V4</td><td>2/9 × V1</td><td>2/7 × V1</td></tr><tr><td>V5</td><td>1/9 × V1</td><td>1/7 × V1</td></tr></tbody></table><br><table border="1"><thead><tr><th colspan="3">ML9051</th></tr></thead><tbody><tr><td>V2</td><td>7/8 × V1</td><td>5/6 × V1</td></tr><tr><td>V3</td><td>6/8 × V1</td><td>4/6 × V1</td></tr><tr><td>V4</td><td>2/8 × V1</td><td>2/6 × V1</td></tr><tr><td>V5</td><td>1/8 × V1</td><td>1/6 × V1</td></tr></tbody></table> | ML9050 |  |  | V2 | 8/9 × V1 | 6/7 × V1 | V3 | 7/9 × V1 | 5/7 × V1 | V4 | 2/9 × V1 | 2/7 × V1 | V5 | 1/9 × V1 | 1/7 × V1 | ML9051 |  |  | V2 | 7/8 × V1 | 5/6 × V1 | V3 | 6/8 × V1 | 4/6 × V1 | V4 | 2/8 × V1 | 2/6 × V1 | V5 | 1/8 × V1 | 1/6 × V1 |
|                      | ML9050                     |                |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
|                      | V2                         | 8/9 × V1       | 6/7 × V1                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
|                      | V3                         | 7/9 × V1       | 5/7 × V1                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| V4                   | 2/9 × V1                   | 2/7 × V1       |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| V5                   | 1/9 × V1                   | 1/7 × V1       |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| ML9051               |                            |                |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| V2                   | 7/8 × V1                   | 5/6 × V1       |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| V3                   | 6/8 × V1                   | 4/6 × V1       |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| V4                   | 2/8 × V1                   | 2/6 × V1       |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| V5                   | 1/8 × V1                   | 1/6 × V1       |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| VR                   | 2                          | I              | Voltage adjustment pins. Voltages between V1 and V <sub>SS</sub> are applied using a resistance voltage divider.<br>These pins are effective only when the internal resistors for voltage V1 adjustment are not used (IRS = "L").<br>Do not use these pins when the internal resistors for voltage V1 adjustment are used (IRS = "H"). |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| VC1+                 | 2                          | 0              | These are the pins for connecting the positive side of the capacitors for voltage multiplication.<br>Connect capacitors between VS1– and these pins.                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |
| VS1–                 | 2                          | 0              | These are the pins for connecting the negative side of the capacitors for voltage multiplication.<br>Connect capacitors between these pins and VC1+, VC3+, and VC5+.                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |        |  |  |    |          |          |    |          |          |    |          |          |    |          |          |

| Function             | Pin name       | Number of pins | I/O | Description                                                                                                                                                                                                                                                                                                                                                                                                                                         |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|----------------------|----------------|----------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|----------------|----------------|----------------|-----------------|---|---|----|----|---|---|-----|----|---|---|----|----|---|---|----|-----|------------|---|-----|--|
| Power supply circuit | VC2+           | 2              | 0   | These are the pins for connecting the positive side of the capacitors for voltage multiplication.<br>Connect capacitors between VS2– and these pins.                                                                                                                                                                                                                                                                                                |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      | VS2–           | 2              | 0   | These are the pins for connecting the negative side of the capacitors for voltage multiplication.<br>Connect capacitors between these pins and VC2+, VC4+, and VC6+ (during 7-times voltage multiplication).                                                                                                                                                                                                                                        |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      | VC3+           | 2              | 0   | These are the pins for connecting the positive side of the capacitors for voltage multiplication.<br>Connect capacitors between VS1– and these pins.                                                                                                                                                                                                                                                                                                |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      | VC4+           | 2              | 0   | These are the pins for connecting the positive side of the capacitors for voltage multiplication.<br>Connect capacitors between VS2– and these pins.                                                                                                                                                                                                                                                                                                |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      | VC5+           | 2              | 0   | These are the pins for connecting the positive side of the capacitors for voltage multiplication.<br>Connect capacitors between VS1– and these pins.                                                                                                                                                                                                                                                                                                |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      | VC6+           | 2              | 0   | These are the pins for connecting the positive side of the capacitors for voltage multiplication.<br>Connect capacitors between VS2– and these pins (during 7-times voltage multiplication).<br>For 6-times voltage multiplication, connect these pins to the V <sub>OUT</sub> pin.                                                                                                                                                                 |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
| LCD Drive output     | SEG0 to SEG131 | 132            | 0   | These are the LCD segment drive outputs.<br>One of the levels among V1, V3, V4, and V <sub>SS</sub> is selected depending on the combination of the display RAM content and the FR signal.                                                                                                                                                                                                                                                          |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      |                |                |     | <table><tr><th rowspan="2">RAM Data</th><th rowspan="2">FR</th><th colspan="2">Output voltage</th></tr><tr><th>Normal display</th><th>Reverse display</th></tr><tr><td>H</td><td>H</td><td>V1</td><td>V3</td></tr><tr><td>H</td><td>L</td><td>VSS</td><td>V4</td></tr><tr><td>L</td><td>H</td><td>V3</td><td>V1</td></tr><tr><td>L</td><td>L</td><td>V4</td><td>VSS</td></tr><tr><td>Power save</td><td>—</td><td colspan="2">VSS</td></tr></table> | RAM Data       | FR              | Output voltage |                | Normal display | Reverse display | H | H | V1 | V3 | H | L | VSS | V4 | L | H | V3 | V1 | L | L | V4 | VSS | Power save | — | VSS |  |
|                      |                |                |     | RAM Data                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                 | FR             | Output voltage |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      |                |                |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Normal display | Reverse display |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      |                |                |     | H                                                                                                                                                                                                                                                                                                                                                                                                                                                   | H              | V1              | V3             |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      |                |                |     | H                                                                                                                                                                                                                                                                                                                                                                                                                                                   | L              | VSS             | V4             |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      |                |                |     | L                                                                                                                                                                                                                                                                                                                                                                                                                                                   | H              | V3              | V1             |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
|                      |                |                |     | L                                                                                                                                                                                                                                                                                                                                                                                                                                                   | L              | V4              | VSS            |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |
| Power save           | —              | VSS            |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                |                |                |                 |   |   |    |    |   |   |     |    |   |   |    |    |   |   |    |     |            |   |     |  |

| Function         | Pin name                                                                                                                 | Number of pins | I/O            | Description                                                                                                                                                                                               |               |
|------------------|--------------------------------------------------------------------------------------------------------------------------|----------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| LCD Drive output | COM0 to COMn                                                                                                             | 96             | O              | These are the LCD common drive outputs.                                                                                                                                                                   |               |
|                  |                                                                                                                          |                |                |                                                                                                                                                                                                           | COM           |
|                  |                                                                                                                          |                |                | ML9050                                                                                                                                                                                                    | COM0 to COM63 |
|                  |                                                                                                                          |                |                | ML9051                                                                                                                                                                                                    | COM0 to COM47 |
|                  | One of the levels among V1, V2, V5, and VSS is selected depending on the combination of the scan data and the FR signal. |                |                |                                                                                                                                                                                                           |               |
|                  | Scan data                                                                                                                | FR             | Output voltage |                                                                                                                                                                                                           |               |
|                  | H                                                                                                                        | H              | VSS            |                                                                                                                                                                                                           |               |
|                  | H                                                                                                                        | L              | V1             |                                                                                                                                                                                                           |               |
|                  | L                                                                                                                        | H              | V2             |                                                                                                                                                                                                           |               |
|                  | L                                                                                                                        | L              | V5             |                                                                                                                                                                                                           |               |
| Power save       | —                                                                                                                        | Vss            |                |                                                                                                                                                                                                           |               |
|                  | COMS                                                                                                                     | 2              | O              | These are the COM output pins only for indicators. Both pins output the same signal. Leave these pins open when they are not used.<br>The same signal is output in both master and slave operation modes. |               |
|                  | TEST0                                                                                                                    |                | I              | These are the pins for testing the IC chip. Leave these pins open during normal use.                                                                                                                      |               |
| TEST1            |                                                                                                                          | O              |                |                                                                                                                                                                                                           |               |



## FUNCTIONAL DESCRIPTION

### MPU Interface

- Selection of interface type

The ML9050/9051 carries out data transfer using either the 8-bit bi-directional data bus (D7 to D0) or the serial data input line (SI). Either the 8-bit parallel data input or serial data input can be selected as shown in Table 1 by setting the P/ $\overline{S}$  pin to the "H" or the "L" level.

**Table 1**

| P/ $\overline{S}$ | $\overline{CS1}$ | CS2 | A0 | $\overline{RD}$ | $\overline{WR}$ | C86 | D7 | D6  | D5 to D0 |
|-------------------|------------------|-----|----|-----------------|-----------------|-----|----|-----|----------|
| H: Parallel input | $\overline{CS1}$ | CS2 | A0 | $\overline{RD}$ | $\overline{WR}$ | C86 | D7 | D6  | D5 to D0 |
| L: Serial input   | $\overline{CS1}$ | CS2 | A0 | —               | —               | —   | SI | SCL | (HZ)     |

A hyphen (—) indicates that the pin can be tied to the "H" or the "L" level.

- Parallel interface

When the parallel interface is selected, (P/ $\overline{S}$  = "H"), it is possible to connect this LSI directly to the MPU bus of either an 80-series MPU or a 68-series MPU as shown in Table 2 depending on whether the pin C86 is set to "H" or "L".

**Table 2**

| P/ $\overline{S}$    | $\overline{CS1}$ | CS2 | A0 | $\overline{RD}$ | $\overline{WR}$   | D7 to D0 |
|----------------------|------------------|-----|----|-----------------|-------------------|----------|
| H: 68-Series MPU bus | $\overline{CS1}$ | CS2 | A0 | E               | R/ $\overline{W}$ | D7 to D0 |
| L: 80-Series MPU bus | $\overline{CS1}$ | CS2 | A0 | $\overline{RD}$ | $\overline{WR}$   | D7 to D0 |

The data bus signals are identified as shown in Table 3 below depending on the combination of the signals A0,  $\overline{RD}$ (E), and  $\overline{WR}$ (R/ $\overline{W}$ ) of Table 2.

**Table 3**

|                              | Common | 68-Series         | 80-Series       |                 |
|------------------------------|--------|-------------------|-----------------|-----------------|
|                              | A0     | R/ $\overline{W}$ | $\overline{RD}$ | $\overline{WR}$ |
| Display data read            | 1      | 1                 | 0               | 1               |
| Display data write           | 1      | 0                 | 1               | 0               |
| Status read                  | 0      | 1                 | 0               | 1               |
| Control data write (command) | 0      | 0                 | 1               | 0               |

## Serial interface

When the serial interface is selected ( $P/\overline{S} = "L"$ ), the serial data input (SI) and the serial clock input (SCL) can be accepted if the chip is in the active state ( $\overline{CS1} = "L"$  and  $CS2 = "H"$ ). The serial interface consists of an 8-bit shift register and a 3-bit counter. The serial data is read in from the serial data input pin in the sequence D7, D6, ... , D0 at the rising edge of the serial clock input, and is converted into parallel data at the rising edge of the 8th serial clock pulse and processed further. The identification of whether the serial data is display data or command is judged based on the A0 input, and the data is treated as display data when A0 is "H" and as command when A0 is "L". The A0 input is read in and identified at the rising edge of the  $(8 \times n)$  th serial clock pulse after the chip has become active. Fig. 1 shows the signal chart of the serial interface. (When the chip is not active, the shift register and the counter are reset to their initial states. No data read out is possible in the case of the serial interface. It is necessary to take sufficient care about wiring termination reflection and external noise in the case of the SCL signal. We recommend verification of operation in an actual unit.)

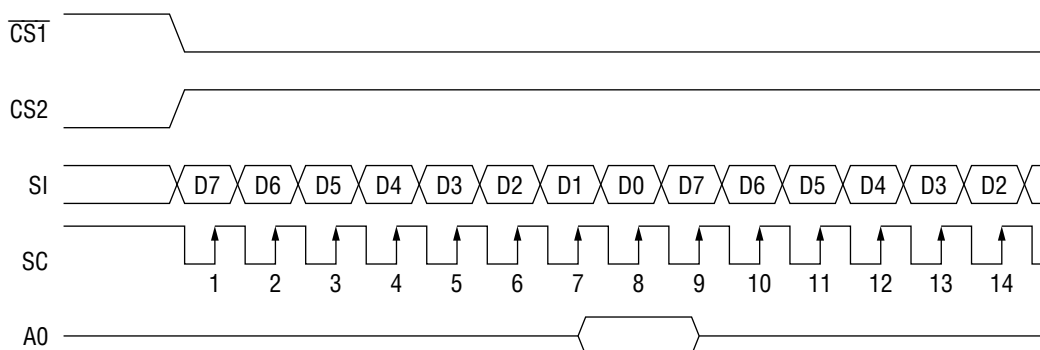


Fig. 1

### • Chip select

The ML9050/9051 has the two chip select pins  $\overline{CS1}$  and  $CS2$ , and the MPU interface or the serial interface is enabled only when  $\overline{CS1} = "L"$  and  $CS2 = "H"$ . When the chip select signals are in the inactive state, the D0 to D7 lines will be in the high impedance state and the inputs A0,  $\overline{RD}$ , and  $\overline{WR}$  will not be effective. When the serial interface has been selected, the shift register and the counter are reset when the chip select signals are in the inactive state.

### • Accessing the display data RAM and the internal registers

Accessing the ML9050/9051 from the MPU side requires merely that the cycle time ( $t_{CYC}$ ) be satisfied, and high speed data transfer without requiring any wait time is possible. Also, during the data transfer with the MPU, the ML9050/9051 carries out a type of pipeline processing between LSIs via a bus holder associated with the internal data bus. For example, when the MPU writes data in the display data RAM, the data is temporarily stored in the bus holder, and is then written into the display data RAM before the next data read cycle. Further, when the MPU reads out data in the display data RAM, first a dummy data read cycle is carried out to temporarily store the data in the bus holder which is then placed on the system bus and is read out during the next read cycle. There is a restriction on the read sequence of the display data RAM, which is that the read instruction immediately after setting the address does not read out the data of that address, but that data is output as the data of the address specified during the second data read sequence, and hence care should be taken about this during reading. Therefore, always one dummy read is necessary immediately after setting the address or after a write cycle. This relationship is

- Data write

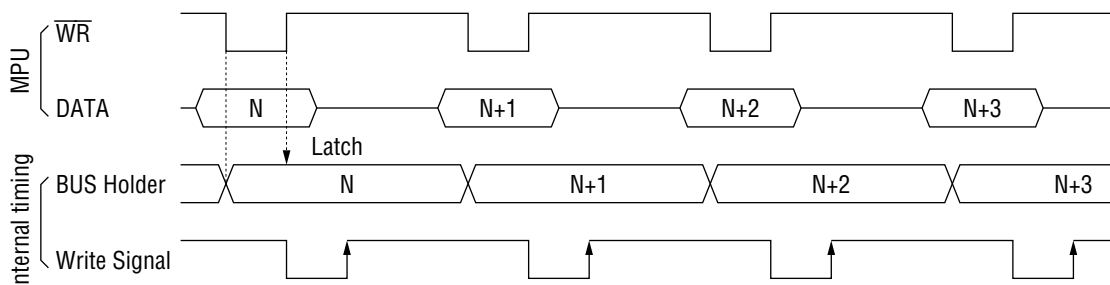


Fig. 2(a)

- Data read

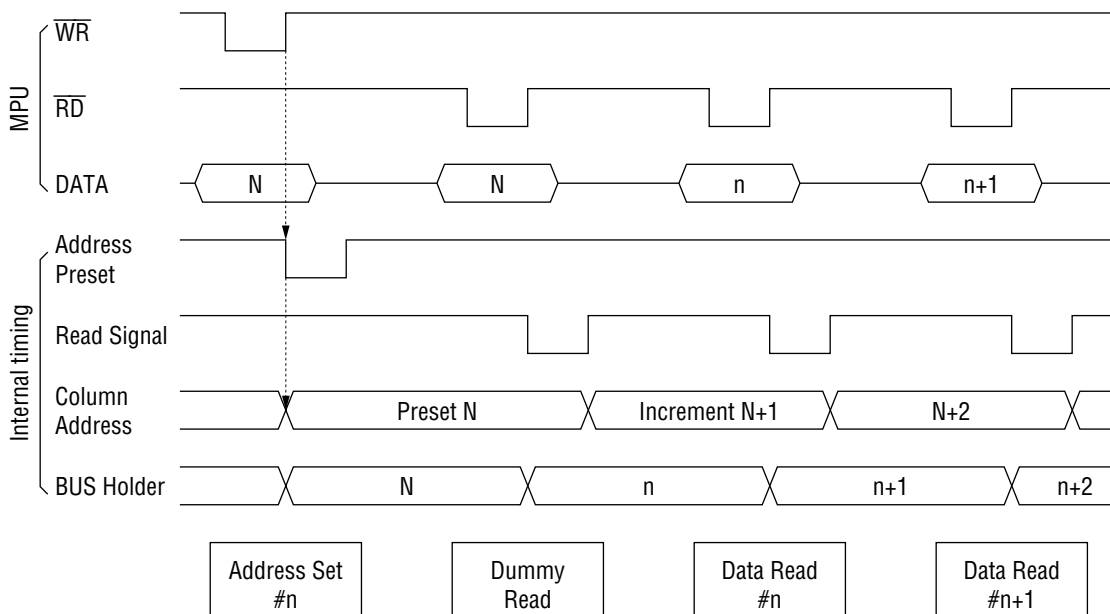


Fig. 2(b)


- Busy flag

The busy flag being "1" indicates that the ML9050/9051 is carrying out internal operations, and hence no instruction other than a status read instruction is accepted during this period. The busy flag is output at pin D7 when a status read instruction is executed. If the cycle time ( $t_{CYC}$ ) is established, there is no need to check this flag before issuing every command and hence the processing performance of the MPU can be increased greatly.

## Display data RAM

- Display data RAM

This is the RAM storing the dot data for display and has an organization of  $65 (8 \text{ pages} \times 8 \text{ bits} + 1) \times 132 \text{ bits}$ . It is possible to access any required bit by specifying the page address and the column address. Since the display data D7 to D0 from the MPU corresponds to the LCD display in the direction of the common lines as shown in Fig. 3, there are fewer restrictions during display data transfer when the ML9050/9051 is used in a multiple chip configuration, thereby making it easily possible to realize a display with a high degree of freedom. Also, since the display data RAM read/write from the MPU side is carried out via an I/O buffer, it is done independent of the signal read operation for the LCD drive. Consequently, the display is not affected by flickering, etc., even when the display data RAM is accessed asynchronously during the LCD display operation.

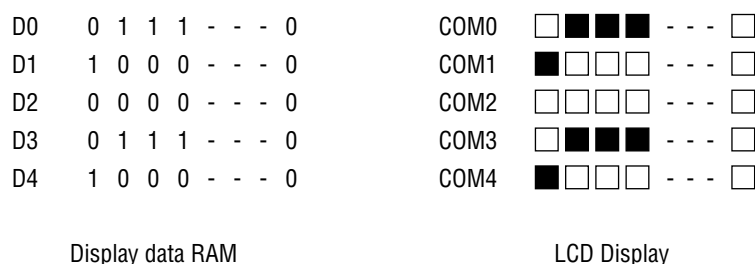

**Fig. 3**

- Page address circuit

The page address of the display data RAM is specified using the page address set command as shown in Fig. 4. Specify the page address again when accessing after changing the page. The page address 8 (D3, D2, D1, D0 → 1, 0, 0, 0) is the RAM area dedicated to the indicator, and only the display data D0 is valid in this page.

- Column address circuit

The column address of the display data RAM is specified using the column address set command as shown in Fig. 4. Since the specified column address is incremented (by +1) every time a display data read/write command is issued, the MPU can access the display data continuously. Further, the incrementing of the column address is stopped at the column address of 83H. Since the column address and the page address are independent of each other, it is necessary, for example, to specify separately the new page address and the new column address when changing from column 83H of page 0 to column 00H of page 1. Also, as is shown in Table 4, it is possible to reverse the correspondence relationship between the display data RAM column address and the segment output using the ADC command (the segment driver direction select command). This reduces the IC placement restrictions at the time of assembling LCD modules.

### Table 4

|          | SEG Output                    |        |
|----------|-------------------------------|--------|
| ADC      | SEG0                          | SEG131 |
| D0 = "0" | 0(H) → Column Address → 83(H) |        |
| D0 = "1" | 83(H) ← Column Address ← 0(H) |        |

- Line address circuit

The line address circuit is used for specifying the line address corresponding to the COM output when displaying the contents of the display data RAM as is shown in Fig. 4. Normally, the topmost line in the display (COM0 output in the normal display state of the common output, and COM63 output and COM47 output for the ML9050 and the ML9051, respectively, in the reverse display stage) is specified using the display start line address set command. The display area is 65 lines and 49 lines for the ML9050 and the ML9051, respectively, in the direction of increasing line address from the specified display start line address. It is possible to carry out screen scrolling and page changing by dynamically changing the line address using the display start line address set command.

- Display data latch circuit

The display data latch circuit is a latch for temporarily storing the data from the display data RAM before being output to the LCD drive circuits. Since the commands for selecting normal/reverse display and turning the display ON/OFF control the data in this latch, the data in the display data RAM will not be changed.

### Oscillator circuit

This is an RC oscillator that generates the display clock. The oscillator circuit is effective only when  $M/\overline{S}$  = "H" and also CLS = "H". The oscillations will be stopped when CLS = "L", and the display clock has to be input to the CL pin.

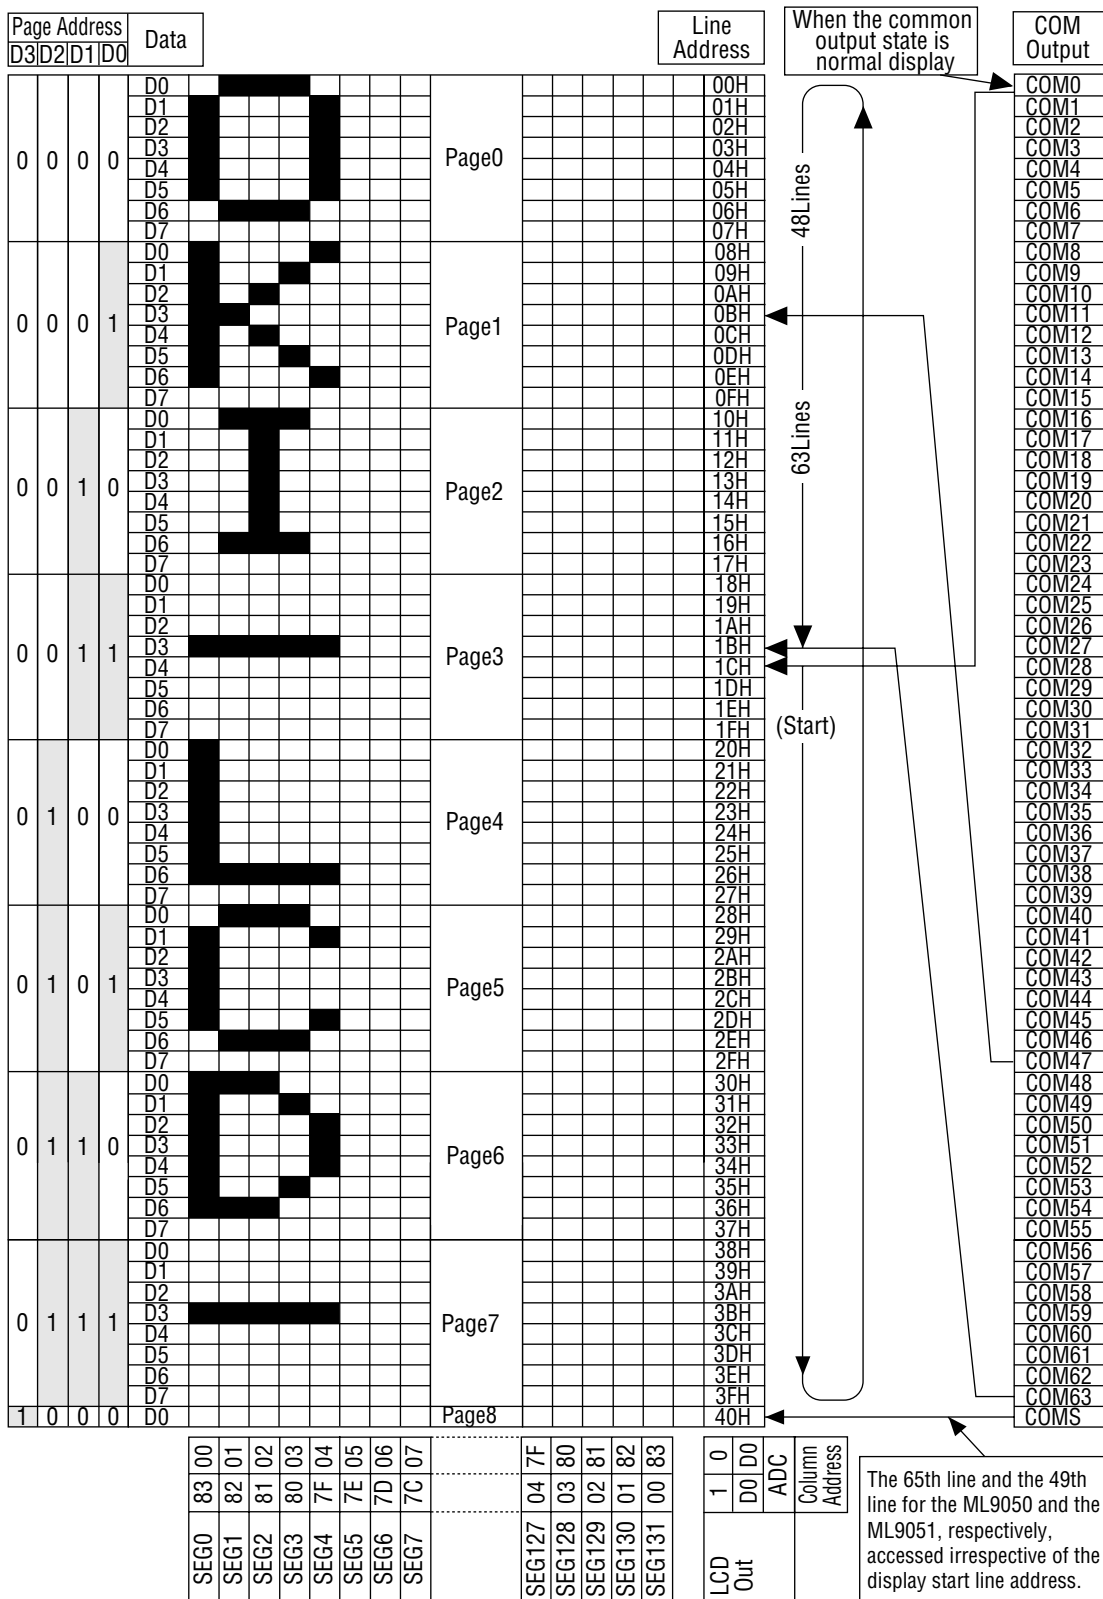


Fig. 4

### Display timing generator circuit

This circuit generates the timing signals for the line address circuit and the display data latch circuit from the display clock. The display data is latched in the display data latch circuit and is output to the segment drive output pins in synchronization with the display clock. This circuit generates the timing signals for the line address circuit and the display data latch circuit from the display clock. The display data is latched in the display data latch circuit and is output to the segment drive output pins in synchronization with the display clock. The read out of the display data to the LCD drive circuits is completely independent of the display data RAM access from the MPU. As a result, there is no bad influence such as flickering on the display even when the display data RAM is accessed asynchronously during the LCD display. Also, the internal common timing and LCD frame reversal (FR) signals are generated by this circuit from the display clock. The drive waveforms of the frame reversal drive method shown in Fig. 5(a) for the LCD drive circuits are generated by this circuit. Further, the drive waveforms of the line reversal method shown in Fig. 5(b) can also be generated depending on the issued command.

In the line reversal drive method, it is possible to carry out reverse display drive at every line to a maximum of 32 lines. Fig. 5(b) shows the waveforms of the 1 line reversal drive method.


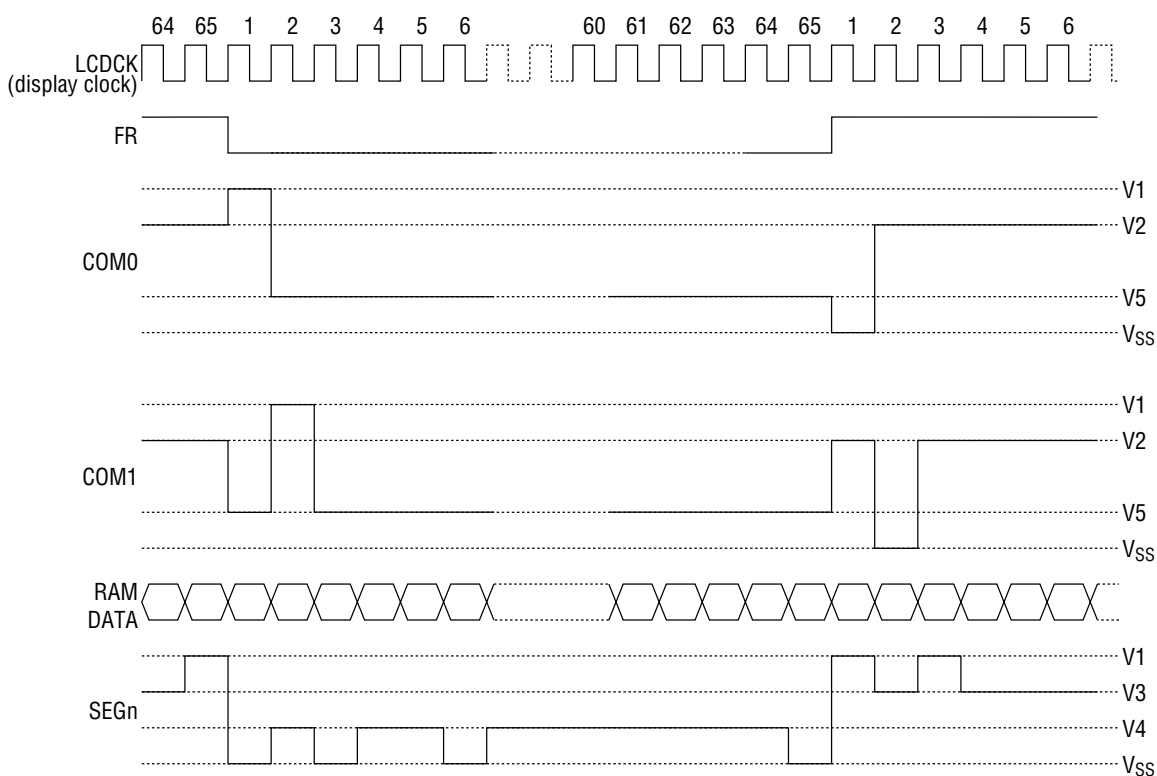


Fig. 5(a) Waveforms in the frame reversal drive method

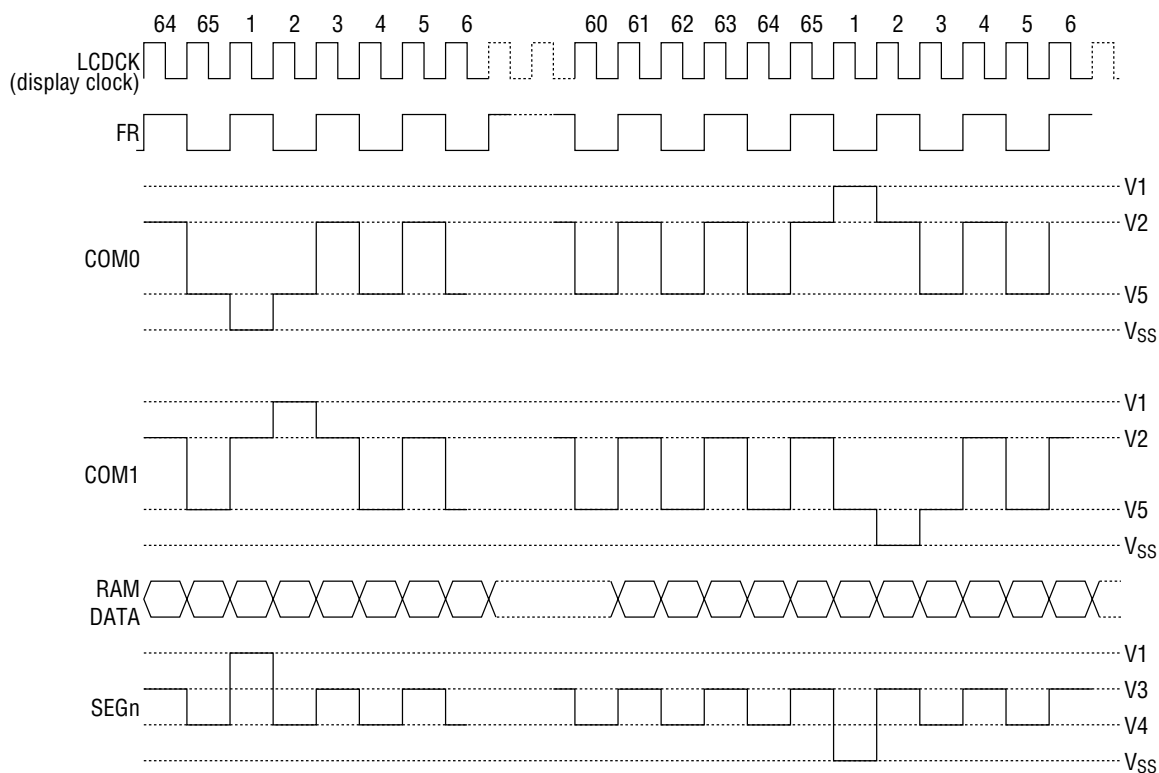

**Fig. 5(b) Waveforms in the line reversal drive method**

When the ML9050/9051 is used in a multiple chip configuration, it is necessary to supply the slave side display timing signals (FR, CL, and  $\overline{\text{DOF}}$ ) from the master side.

The statuses of the signals FR, CL, and  $\overline{\text{DOF}}$  are shown in Table 5.

**Table 5**

| Operating mode                                              |                                                | FR     | CL     | $\overline{\text{DOF}}$ |
|-------------------------------------------------------------|------------------------------------------------|--------|--------|-------------------------|
| Master mode ( $\text{M}/\overline{\text{S}} = \text{"H"}$ ) | Internal oscillator circuit enabled (CLS = H)  | Output | Output | Output                  |
|                                                             | Internal oscillator circuit disabled (CLS = L) | Output | Input  | Output                  |
| Slave mode ( $\text{M}/\overline{\text{S}} = \text{"L"}$ )  | Internal oscillator circuit enabled (CLS = H)  | Input  | Input  | Input                   |
|                                                             | Internal oscillator circuit disabled (CLS = L) | Input  | Input  | Input                   |



**Common output state selection circuit (see Table 6)**

Since the COM output scanning directions can be set using the common output state selection command in the ML9050/9051, it is possible to reduce the IC placement restrictions at the time of assembling LCD modules.

**Table 6**

| State           | COM Scanning direction |              |
|-----------------|------------------------|--------------|
|                 | ML9050                 | ML9051       |
| Normal Display  | COM0 → COM63           | COM0 → COM47 |
| Reverse Display | COM63 → COM0           | COM47 → COM0 |

**LCD Drive circuits**

This LSI incorporates 197 sets and 181 sets of multiplexers for the ML9050 and the ML9051, respectively, that generate 4-level outputs for driving the LCD. These output the LCD drive voltage in accordance with the combination of the display data, COM scanning signals, and the FR signal. Fig. 6 shows examples of the SEG and COM output waveforms in the frame reversal drive method.

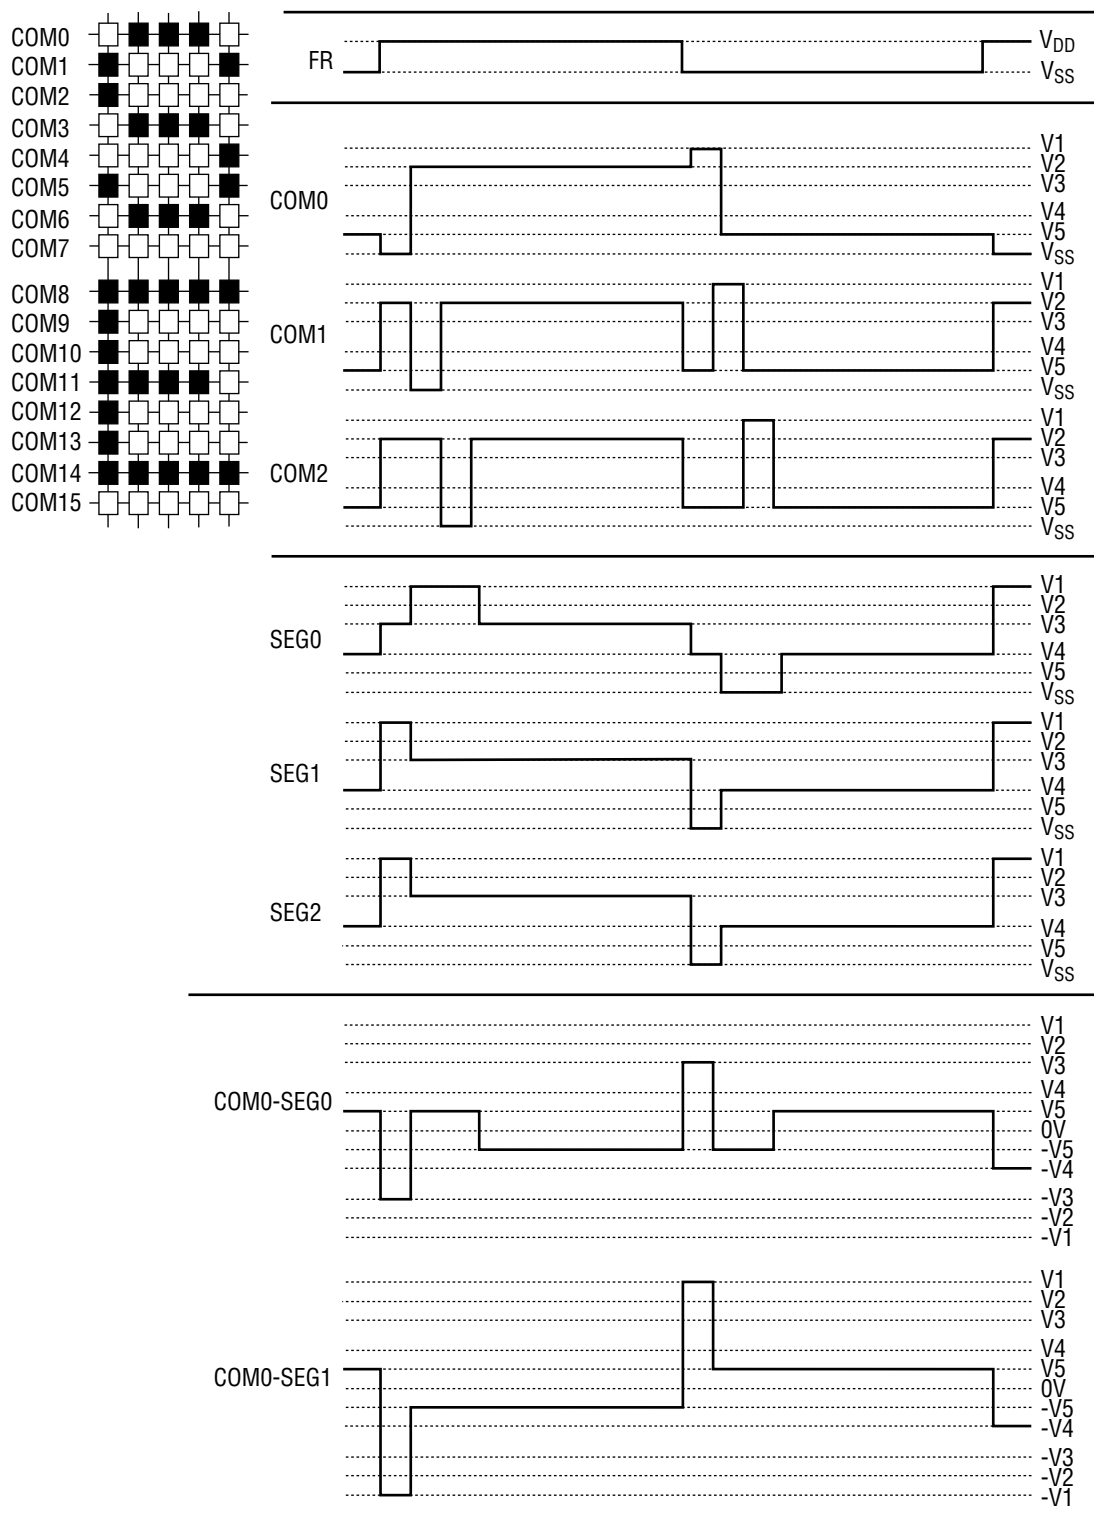


Fig. 6

## Power supply circuit

This is the low power consumption type power supply circuit for generating the voltages necessary for driving LCD devices, and consists of voltage multiplier circuits, voltage adjustment circuits, and voltage follower circuits. In the power supply circuit, it is possible to control the ON/OFF of each of the circuits of the voltage multiplier, voltage adjustment circuits, and voltage follower circuits using the power control set command. As a result, it is also possible to use parts of the functions of both the external power supply and the internal power supply. Table 7 shows the functions controlled by the 3-bit data of the power control set command and Table 8 shows a sample combination.

**Table 7 Details of functions controlled by the bits of the power control set command**

| Control bit | Function controlled by the bit                                |
|-------------|---------------------------------------------------------------|
| D2          | Voltage multiplier circuit control bit                        |
| D1          | Voltage adjustment circuit (V adjustment circuit) control bit |
| D0          | Voltage follower circuit (V/F circuit) control bit            |

**Table 8 Sample combination for reference**

| State used                                  | D2 | D1 | D0 | Circuit            |              |     | External voltage input | Voltage multiplier pins *1 |
|---------------------------------------------|----|----|----|--------------------|--------------|-----|------------------------|----------------------------|
|                                             |    |    |    | Voltage multiplier | V Adjustment | V/F |                        |                            |
| Only the internal power supply is used      | 1  | 1  | 1  | ○                  | ○            | ○   | V <sub>IN</sub>        | Used                       |
| Only V adjustment and V/F circuits are used | 0  | 1  | 1  | ×                  | ○            | ○   | V <sub>OUT</sub>       | OPEN                       |
| Only V/F circuits are used                  | 0  | 0  | 1  | ×                  | ×            | ○   | V1                     | OPEN                       |
| Only the external power supply is used      | 0  | 0  | 0  | ×                  | ×            | ×   | V1 to V5               | OPEN                       |

\*1: The voltage multiplier pins are the pins VC1+, VS1-, VC2+, VS2-, VC3+, VC4+, VC5+, and VC6+.

If combinations other than the above are used, normal operation is not guaranteed.

- Voltage multiplier circuits

The connections for 2-times to 7-times voltage multiplier circuits are shown below.


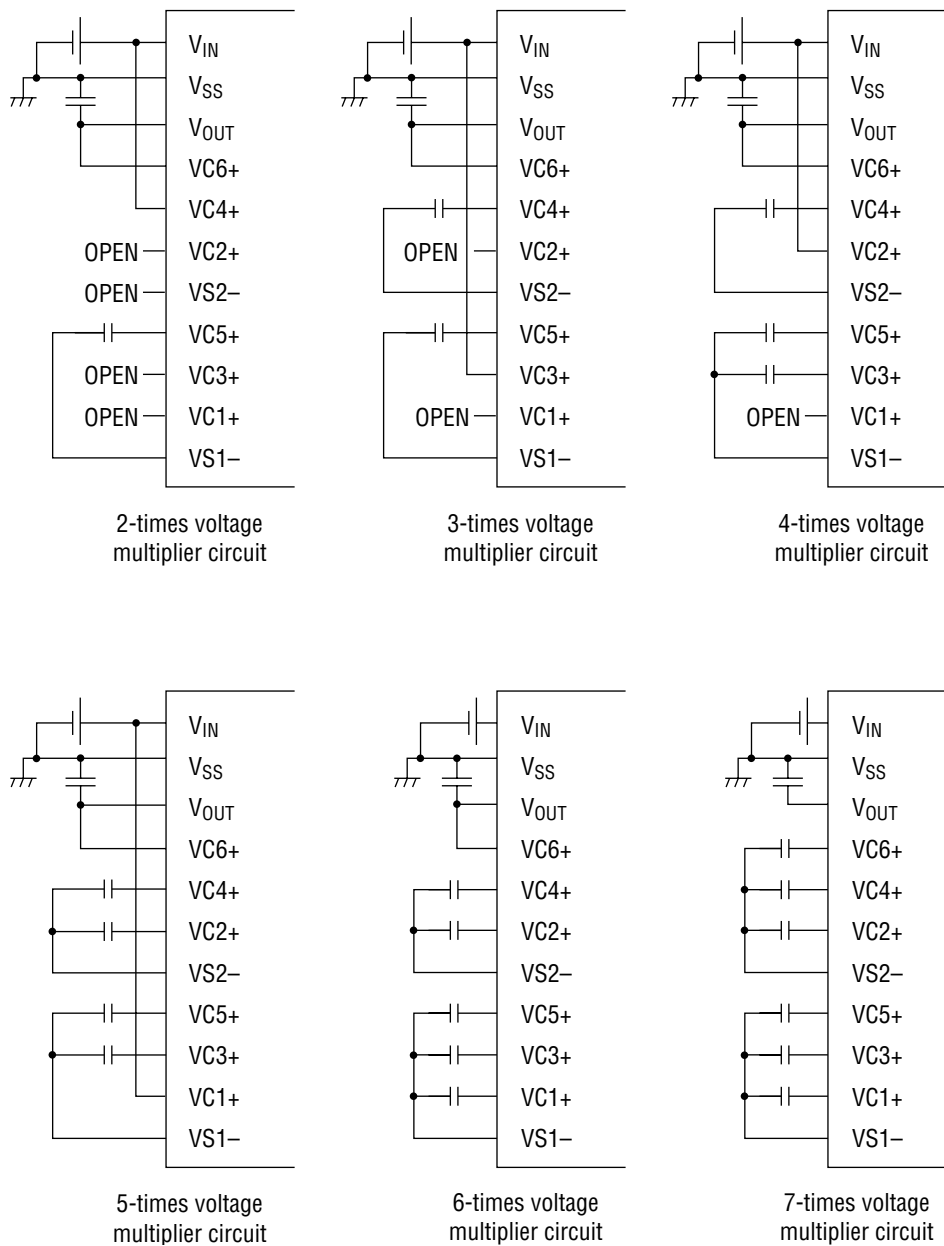


Fig. 7

The voltage relationships in voltage multiplication are shown in Fig. 8.

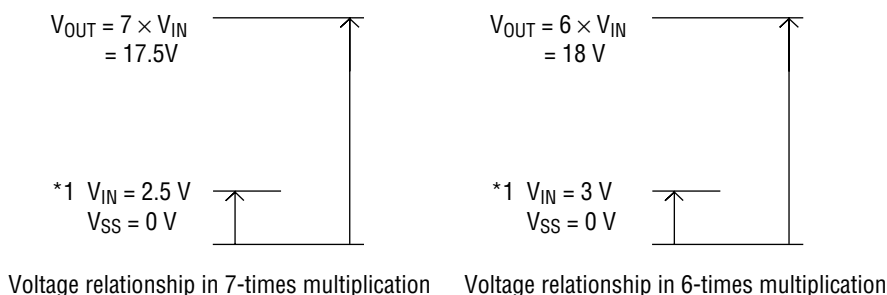

**Fig. 8**

\*1: The voltage range of  $V_{IN}$  should be set so that the voltage at the pin  $V_{OUT}$  does not exceed the absolute maximum rating.


#### • Voltage adjustment circuit

The voltage multiplier output  $V_{OUT}$  produces the LCD drive voltage  $V_1$  via the voltage adjustment circuit. Since the ML9050/9051 incorporates a high accuracy constant voltage generator, a 64-level electronic potentiometer function, and also resistors for voltage  $V_1$  adjustment, it is possible to build a high accuracy voltage adjustment circuit with very few components. In addition, the ML9050/9051 is available in three models with the temperature gradients of - (1) about  $-0.05\%/^{\circ}\text{C}$ , (2) about  $-0.2\%/^{\circ}\text{C}$ , and (3) external input (input to pin  $V_{RS}$ ), as a  $V_{REG}$  option.

(a) When the internal resistors for voltage  $V_1$  adjustment are used

It is possible to control the LCD power supply voltage  $V_1$  and adjust the intensity of LCD display using commands and without needing any external resistors, if the internal voltage  $V_1$  adjustment resistors and the electronic potentiometer function are used. The voltage  $V_1$  can be obtained by the following equation A-1 in the range of  $V_1 < V_{OUT}$ .

$$V_1 = (1 + (R_b/R_a)) \cdot V_{EV} = (1 + (R_b/R_a)) \cdot (1 - (\alpha/324)) \cdot V_{REG} \quad (\text{Eqn. A-1})$$

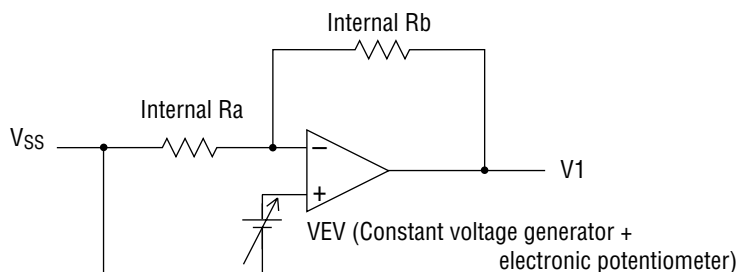

**Fig. 9**

$V_{REG}$  is a constant voltage generated inside the IC and its value is constant as given in Table 9 at  $T_a = 25^{\circ}\text{C}$ .

Table 9

| Model                     | Temperature gradient | Unit   | VREG | Unit |
|---------------------------|----------------------|--------|------|------|
| (1) Internal power supply | -0.05                | [%/°C] | 3.0  | [V]  |
| (2) Internal power supply | -0.2                 | [%/°C] | 3.0  | [V]  |
| (3) External input        | —                    | —      | VRS  | [V]  |

Here,  $\alpha$  is the electronic potentiometer function which allows one level among 64 levels to be selected by merely setting the data in the 6-bit electronic potentiometer register. The values of  $\alpha$  set by the electronic potentiometer register are shown in Table 10.

Table 10

| $\alpha$ | D5 | D4 | D3 | D2 | D1 | D0 |
|----------|----|----|----|----|----|----|
| 63       | 0  | 0  | 0  | 0  | 0  | 0  |
| 62       | 0  | 0  | 0  | 0  | 0  | 1  |
| 61       | 0  | 0  | 0  | 0  | 1  | 0  |
| ⋮        | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  |    |
| 1        | 1  | 1  | 1  | 1  | 1  | 0  |
| 0        | 1  | 1  | 1  | 1  | 1  | 1  |

Rb/Ra is the voltage V1 adjustment internal resistor ratio and can be adjusted to one of 8 levels by the voltage V1 adjustment internal resistor ratio set command. The reference values of the ratio (1+Rb/Ra) according to the 3-bit data set in the voltage V1 adjustment internal resistor ratio setting register are listed in Table 11.

**Table 11 Voltage V1 adjustment internal resistor ratio setting register values and the ratio (1+Rb/Ra) (For reference)**


| Register value |    |    | ML9050                                         |      |         | ML9051                                         |      |         |
|----------------|----|----|------------------------------------------------|------|---------|------------------------------------------------|------|---------|
|                |    |    | Temperature gradient of the model [unit: %/°C] |      |         | Temperature gradient of the model [unit: %/°C] |      |         |
| D2             | D1 | D0 | -0.05                                          | -0.2 | VREG *1 | -0.05                                          | -0.2 | VREG *1 |
| 0              | 0  | 0  | 3.0                                            | 3.0  | 1.5     | 3.0                                            | 3.0  | 1.5     |
| 0              | 0  | 1  | 3.5                                            | 3.5  | 2.0     | 3.5                                            | 3.5  | 2.0     |
| 0              | 1  | 0  | 4.0                                            | 4.0  | 2.5     | 4.0                                            | 4.0  | 2.5     |
| 0              | 1  | 1  | 4.5                                            | 4.5  | 3.0     | 4.5                                            | 4.5  | 3.0     |
| 1              | 0  | 0  | 5.0                                            | 5.0  | 3.5     | 5.0                                            | 5.0  | 3.5     |
| 1              | 0  | 1  | 5.5                                            | 5.5  | 4.0     | 5.4                                            | 5.5  | 4.0     |
| 1              | 1  | 0  | 6.0                                            | 6.0  | 4.5     | 5.9                                            | 6.0  | 4.5     |
| 1              | 1  | 1  | 6.5                                            | 6.5  | 5.0     | 6.5                                            | 6.5  | 5.0     |

(b) When external resistors are used (voltage V1 adjustment internal resistors are not used) - Case 1

It is also possible to set the LCD drive power supply voltage V1 without using the internal resistors for voltage V1 adjustment but connecting external resistors (Ra' and Rb') between VSS & VR and between VR & V1. Even in this case, it is possible to control the LCD power supply voltage V1 and adjust the intensity of LCD display using commands if the electronic potentiometer function is used.

The voltage V1 can be obtained by the following equation B-1 in the range of  $V1 < V_{OUT}$  by setting the external resistors Ra' and Rb' appropriately.

$$V1 = (1 + (Rb' / Ra')) \cdot VEV = (1 + (Rb' / Ra')) \cdot (1 - (\alpha / 324)) \cdot VREG \quad (\text{Eqn. B-1})$$

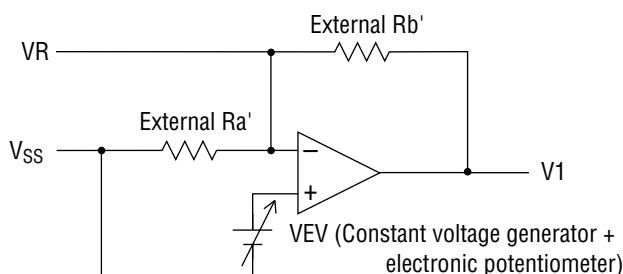

**Fig. 10**

Setting example: Setting  $V1 = 7 \text{ V}$  at  $Ta = 25^\circ\text{C}$  using an ML9050/9051 of the model with a temperature gradient of  $-0.05\% / ^\circ\text{C}$ .

When the electronic potentiometer register value is set to the middle value of (D5, D4, D3, D2, D1, D0) = (1, 0, 0, 0, 0, 0), the value of  $\alpha$  will be 31 and that of VREG will be 3.0 V, and hence the equation B-1 becomes as follows:

$$V1 = (1 + (Rb' / Ra')) \cdot (1 - (\alpha / 324)) \cdot VREG$$

$$7 = (1 + (Rb' / Ra')) \cdot (1 - (31 / 324)) \cdot 3.0 \quad (\text{Eqn. B-2})$$

Further, if the current flowing through Ra' and Rb' is set as  $5\mu\text{A}$ , the value of  $Ra' + Rb'$  will be -  $Ra' + Rb' = 1.4\text{M}\Omega$  (Eqn. B-3)

and hence,

$$Rb' / Ra' = 1.58, Ra' = 543\text{k}\Omega, Rb' = 857\text{k}\Omega.$$

In this case, the variability range of voltage V1 using the electronic potentiometer function and the increment size will be as given in Table 12.

**Table 12**

| V1                | Min            | Typ                | Max             | Unit |
|-------------------|----------------|--------------------|-----------------|------|
| Variability range | 6.24 (level 0) | 7.0 (center value) | 7.74 (level 63) | [V]  |
| Increment size    |                | 24                 |                 | [mV] |


(c) When external resistors are used (voltage V1 adjustment internal resistors are not used) - Case 2

It is possible to set the LCD drive power supply voltage V1 using fine adjustment of Ra' and Rb' by adding a variable resistor to the case of using external resistors in the above case. Even in this case, it is possible to control the LCD power supply voltage V1 and adjust the intensity of LCD display using commands if the electronic potentiometer function is used.

The voltage V1 can be obtained by the following equation C-1 in the range of  $V1 < V_{OUT}$  by setting the external resistors R1, R2 (variable resistor), and R3 appropriately and making fine adjustment of R2 ( $\Delta R_2$ ).

$$V1 = (1 + (R_3 + R_2 - \Delta R_2) / (R_1 + \Delta R_2)) \cdot VEV$$

$$= (1 + (R_3 + R_2 - \Delta R_2) / (R_1 + \Delta R_2)) \cdot (1 - (\alpha / 324)) \cdot VREG \quad (\text{Eqn. C-1})$$

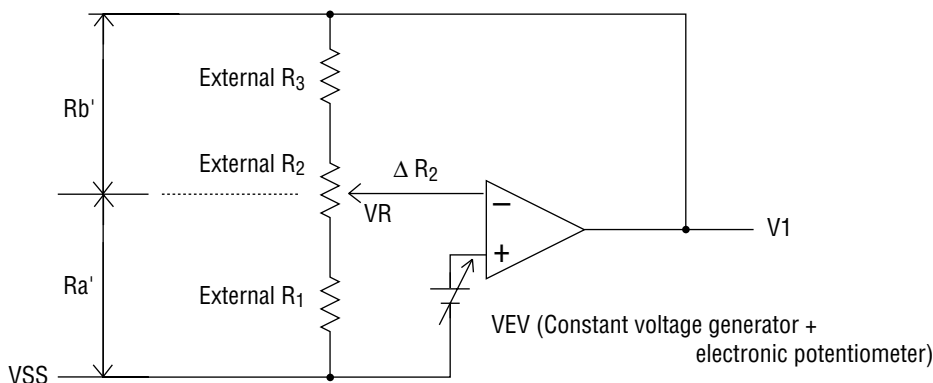

**Fig. 11**

Setting example: Setting V1 in the range 5 V to 9 V using R2 at Ta = 25°C using an ML9050/9051 of the model with a temperature gradient of -0.05% / °C.

When the electronic potentiometer register value is set to the middle value of (D5, D4, D3, D2, D1, D0) = (1, 0, 0, 0, 0, 0), the value of  $\alpha$  will be 31 and that of VREG will be 3.0 V, and hence in order to make V1 = 9 V when  $\Delta R_2 = 0\Omega$ , the equation C-1 becomes as follows:

$$9 = (1 + (R_3 + R_2) / R_1) \cdot (1 - (31 / 324)) \cdot (3.0) \quad (\text{Eqn. C-2})$$

In order to make V1 = 5 V when  $\Delta R_2 = R_2$ ,

$$5 = (1 + R_3 / (R_1 + R_2)) \cdot (1 - (31 / 324)) \cdot (3.0) \quad (\text{Eqn. C-3})$$

Further, if the current flowing between VSS and V1 is set as 5  $\mu\text{A}$ , the value of  $R_1 + R_2 + R_3$  becomes-  $R_1 + R_2 + R_3 = 1.8\text{M}\Omega$  (Eqn. C-4)

and hence,

$$R_1 = 542\text{k}\Omega, R_2 = 436\text{k}\Omega, R_3 = 822\text{k}\Omega.$$

In this case, the variability range of voltage V1 using the electronic potentiometer function and the increment size will be as given in Table 13.

**Table 13**

| V1                | Min            | Typ                | Max             | Unit |
|-------------------|----------------|--------------------|-----------------|------|
| Variability range | 4.45 (level 0) | 7.0 (center value) | 9.96 (level 63) | [V]  |
| Increment size    | 17             | 24                 | 31              | [mV] |



- \* When using the voltage V1 adjustment internal resistors or the electronic potentiometer function, it is necessary to set at least the voltage adjustment circuit and the voltage follower circuits both in the operating state using the power control setting command. Also, when the voltage multiplier circuit is OFF, it is necessary to supply a voltage externally to the VOUT pin.
- \* The pin VR is effective only when the voltage V1 adjustment internal resistors are not used (pin IRS = "L"). Leave this pin open when the voltage V1 adjustment internal resistors are being used (pin IRS = "H").
- \* Since the input impedance of the pin VR is high, it is necessary to take noise countermeasures such as using short wiring length or a shielded wire .

- LCD Drive voltage generator circuits

The voltage V1 is divided using resistors inside the IC to generate the voltages V2, V3, V4, and V5 that are necessary for driving the LCD. In addition, these voltages V2, V3, V4, and V5 are impedance transformed using voltage follower circuits and fed to the LCD drive circuits. The bias ratio of 1/9 or 1/7 can be selected in the ML9050 and the bias ratio of 1/8 or 1/6 can be selected in the ML9051, using the LCD bias setting command.

- High power mode

The power supply circuit incorporated in the ML9050/9051 has an extremely low power consumption.

[Normal mode:  $\overline{\text{HPM}}$  = "H"]. Hence, in the case of an LCD device or panel with a large load, the display quality may become poorer. In such a case, setting the  $\overline{\text{HPM}}$  pin to "L" (high power mode) can improve the quality of display. It is recommended to verify the display using an actual unit in order to decide whether or not to use this mode. Further, if the degree of display quality improvement is still not sufficient even after setting the high power mode, it is necessary to supply the LCD drive power supply from an external source.





- Command sequence for shutting off the internal power supply

When shutting off the internal power supply, it is recommended to use the procedure given in Fig. 11 of switching OFF the power after putting the LSI in the power save mode using the following command sequence.


| Procedure | Description<br>(Command, status) | Command address |    |    |    |    |    |    |    |                                   |
|-----------|----------------------------------|-----------------|----|----|----|----|----|----|----|-----------------------------------|
|           |                                  | D7              | D6 | D5 | D4 | D3 | D2 | D1 | D0 |                                   |
| Step1     | Display OFF                      | 1               | 0  | 1  | 0  | 1  | 1  | 1  | 0  | Power save commands<br>(multiple) |
| ↓         | ↓                                |                 |    |    |    |    |    |    |    |                                   |
| Step2     | Display all ON                   | 1               | 0  | 1  | 0  | 0  | 1  | 0  | 1  |                                   |
| ↓         | ↓                                |                 |    |    |    |    |    |    |    |                                   |
| End       | Internal power supply OFF        |                 |    |    |    |    |    |    |    |                                   |

Fig. 12

## • APPLICATION CIRCUITS
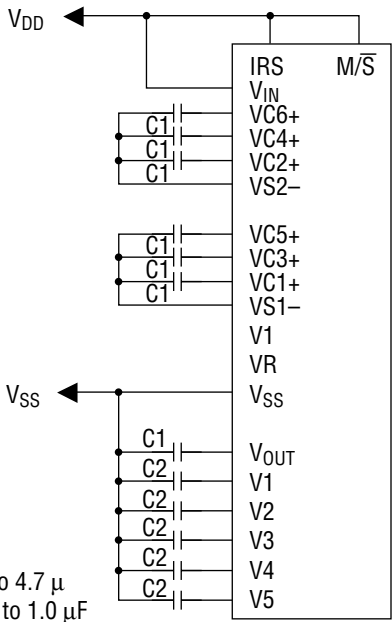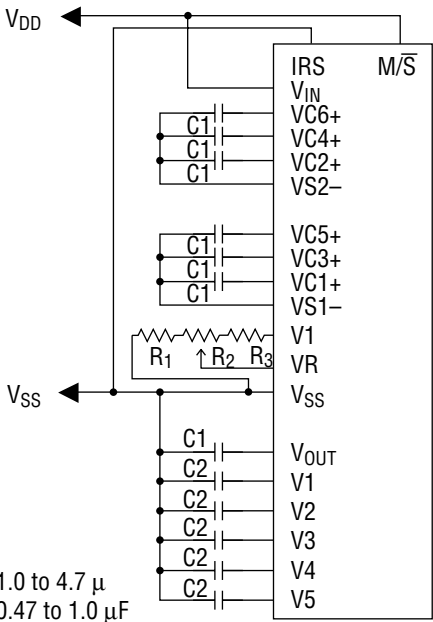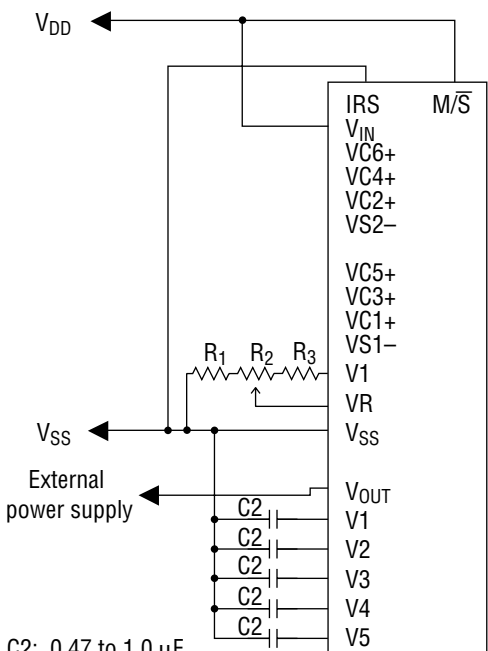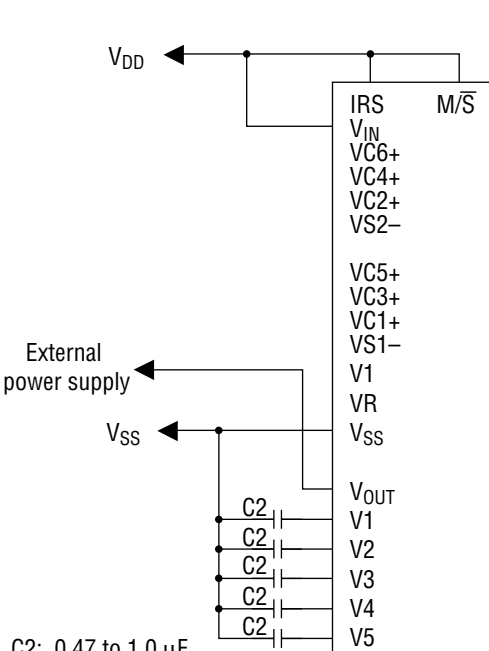
|                                                                                                                                                                 |                                                                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (1) When the voltage multiplier circuit, voltage adjustment circuit, and V/F circuits are all used                                                              | (2) When the voltage multiplier circuit, voltage adjustment circuit, and V/F circuits are all used                                                               |
| When using the voltage V1 adjustment internal resistors                                                                                                         | When not using the voltage V1 adjustment internal resistors                                                                                                      |
| $V_{IN} = V_{DD}$ 7-Times voltage multiplication                                                                                                                | $V_{IN} = V_{DD}$ 7-Times voltage multiplication                                                                                                                 |
|  <p>C1: 1.0 to 4.7 <math>\mu</math><br/>C2: 0.47 to 1.0 <math>\mu</math>F</p> |  <p>C1: 1.0 to 4.7 <math>\mu</math><br/>C2: 0.47 to 1.0 <math>\mu</math>F</p> |
| (3) When only the voltage adjustment circuit and the V/F circuits are used                                                                                      | (4) When only the V/F circuits are used                                                                                                                          |
| When not using the voltage V1 adjustment internal resistors                                                                                                     | When using the voltage V1 adjustment internal resistors                                                                                                          |
|  <p>C2: 0.47 to 1.0 <math>\mu</math>F</p>                                    |  <p>C2: 0.47 to 1.0 <math>\mu</math>F</p>                                    |

(5) When not using the internal power supply

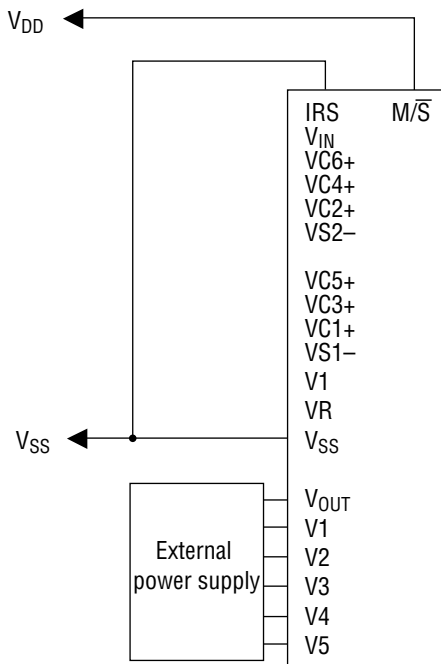

- Reset circuit

This LSI goes into the initialized condition when the  $\overline{\text{RES}}$  input goes to the "L" level. The initialized condition consists of the following conditions.

- (1) Display OFF
- (2) Normal display mode
- (3) ADC Select: Incremented (ADC command D0 = "L")
- (4) Power control register: (D2, D1, D0) = (0, 0, 0)
- (5) The registers and data in the serial interface are cleared.
- (6) LCD Power supply bias ratio: ML9050 ... 1/9 bias, ML9051 ... 1/8 bias
- (7) Read-modify-write: OFF
- (8) Static indicator: OFF  
Static indicator register: (D1, D2) = (0, 0)
- (9) Line 1 is set as the display start line.
- (10) The column address is set to address 0.
- (11) The page address is set to 0.
- (12) Common output state: Normal
- (13) Voltage V1 adjustment internal resistor ratio register: (D2, D1, D0) = (1, 0, 0)
- (14) The electronic potentiometer register set mode is released.  
Electronic potentiometer register: (D5, D4, D3, D2, D1, D0) = (1, 0, 0, 0, 0, 0)
- (15) The LCD drive method is set to the frame reversal method.  
Line reversal count register: (D4, D3, D2, D1, D0) = (1, 0, 0, 0, 0)

On the other hand, when the reset command is used, only the conditions (7) to (15) above are set. As is shown in the "MPU Interface (example for reference)", the  $\overline{\text{RES}}$  pin is connected to the Reset pin of the MPU and the initialization of this LSI is made simultaneously with the resetting of the MPU. This LSI always has to be reset using the  $\overline{\text{RES}}$  pin at the time the power is switched ON. Also, excessive current can flow through this LSI when the control signal from the MPU is in the Hi-Z state. It is necessary to take measures to ensure that the input terminals of this LSI do not go into the Hi-Z state after the power has been switched ON. When the built-in LCD drive power supply circuit of the ML9050/9051 is not used, it is necessary that  $\overline{\text{RES}} = \text{"L"}$  when the external LCD drive power supply goes ON. During the period when  $\overline{\text{RES}} = \text{"L"}$ , although the oscillator circuit is operating, the display timing generator would have stopped and the pins CL, FR, FRS, and  $\overline{\text{DOF}}$  would have been tied to the "H" level. There is no effect on the pins D0 to D7.

## COMMANDS

### MPU Interface

| MPU       | Read mode                                 | Write mode                                |
|-----------|-------------------------------------------|-------------------------------------------|
| 80-Series | Pin $\overline{RD}$ = "L"                 | Pin $\overline{WR}$ = "L"                 |
| 68-Series | Pin $R/\overline{W}$ = "H"<br>Pin E = "H" | Pin $R/\overline{W}$ = "L"<br>Pin E = "H" |

In the case of the 80-series MPU interface, a command is started by inputting a Low pulse on the  $\overline{RD}$  pin or the  $\overline{WR}$  pin.

In the case of the 68-series MPU interface, a command is started by inputting a High pulse on the E pin.

### Description of commands

- Display ON/OFF (Write)

This is the command for controlling the turning on or off the LCD panel. The LCD display is turned on when a "1" is written in bit D0 and is turned off when a "0" is written in this bit.

|             | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------------|----|----|----|----|----|----|----|----|----|
| Display ON  | 0  | 1  | 0  | 1  | 0  | 1  | 1  | 1  | 1  |
| Display OFF | 0  |    |    |    |    |    |    |    | 0  |

- Display start line set (Write)

This command specifies the display starting line address in the display data RAM.

Normally, the topmost line in the display is specified using the display start line set command. It is possible to scroll the display screen by dynamically changing the address using the display start line set command.

| Line address | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|--------------|----|----|----|----|----|----|----|----|----|
| 0            | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| 1            |    |    |    | 0  | 0  | 0  | 0  | 0  | 1  |
| 2            |    |    |    | 0  | 0  | 0  | 0  | 1  | 0  |
| ⋮            |    |    |    | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  |
| 62           |    |    |    | 1  | 1  | 1  | 1  | 1  | 0  |
| 63           |    |    |    | 1  | 1  | 1  | 1  | 1  | 1  |

- Page address set (Write)

This command specifies the page address which corresponds to the lower address when accessing the display data RAM from the MPU side.

It is possible to access any required bit in the display data RAM by specifying the page address and the column address.

| Page address | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|--------------|----|----|----|----|----|----|----|----|----|
| 0            | 0  | 1  | 0  | 1  | 1  | 0  | 0  | 0  | 0  |
| 1            |    |    |    |    |    | 0  | 0  | 0  | 1  |
| 2            |    |    |    |    |    | 0  | 0  | 1  | 0  |
| ⋮            |    |    |    |    |    | ⋮  | ⋮  | ⋮  | ⋮  |
| 7            |    |    |    |    |    | 0  | 1  | 1  | 1  |
| 8            |    |    |    |    |    | 1  | 0  | 0  | 0  |

- Column address set (Write)

This command specifies the column address of the display data RAM. The column address is specified by successively writing the upper 4 bits and the lower 4 bits. Since the column address is automatically incremented (by +1) every time the display data RAM is accessed, the MPU can read or write the display data continuously. The incrementing of the column address is stopped at the address 83H.

|            | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------------|----|----|----|----|----|----|----|----|----|
| Upper bits | 0  | 0  | 0  | 0  | 1  | a7 | a6 | a5 | a4 |
| Lower bits |    |    |    |    | 0  | a3 | a2 | a1 | a0 |

| Column address | a7 | a6 | a5 | a4 | a3 | a2 | a1 | a0 |
|----------------|----|----|----|----|----|----|----|----|
| 0              | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| 1              | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  |
| 2              | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  |
| ⋮              | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  |
| 130            | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  |
| 131            | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 1  |

|    |           |    |    |    |    |    |    |    |
|----|-----------|----|----|----|----|----|----|----|
| A0 | D7        | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 1  | Read data |    |    |    |    |    |    |    |





- Read-modify-write (Write)


This command is used in combination with the End command. When this command is issued once, the column address is not changed when the Display data read command is issued, but is incremented (by +1) only when the Display data write command is issued. This condition is maintained until the End command is issued. When the End command is issued, the column address is restored to the address that was effective at the time the Read-modify-write command was issued last. Using this function, it is possible to reduce the overhead on the MPU when repeatedly changing the data in special display area such as a blinking cursor.

| A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|----|
| 0  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  |

- End (Write)

This command releases the read-modify-write mode and restores the column address to the value at the beginning of the mode.

| A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|----|
| 0  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 0  |

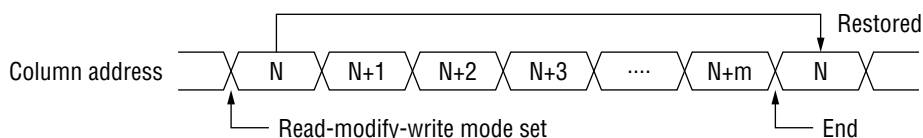

- Reset (Write)

This command initializes the display start line number, column address, page address, common output state, voltage V1 adjustment internal resistor ratio, electronic potentiometer function, and the static indicator function, and also releases the read-modify-write mode or the test mode. This command does not affect the contents of the display data RAM.

The reset operation is made after issuing the reset command.

The initialization after switching on the power is carried out by the reset signal input to the  $\overline{\text{RES}}$  pin.

| A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|----|
| 0  | 1  | 1  | 1  | 0  | 0  | 0  | 1  | 0  |

- Common output state select (Write)

This command is used for selecting the scanning direction of the COM output pins.

|         | ML9050       | ML9051       | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|---------|--------------|--------------|----|----|----|----|----|----|----|----|----|
| Forward | COM0 → COM63 | COM0 → COM47 | 0  | 1  | 1  | 0  | 0  | 0  | *  | *  | *  |
| Reverse | COM63 → COM0 | COM47 → COM0 |    |    |    |    |    | 1  | *  | *  | *  |

\*: Invalid bits

- Power control set (Write)

This command set the functions of the power supply circuits.

| ML9050/9051                     | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|---------------------------------|----|----|----|----|----|----|----|----|----|
| Voltage multiplier circuit: OFF | 0  | 0  | 0  | 1  | 0  | 1  | 0  |    |    |
| Voltage multiplier circuit: ON  |    |    |    |    |    |    | 1  |    |    |
| Voltage adjustment circuit: OFF |    |    |    |    |    |    |    | 0  |    |
| Voltage adjustment circuit: ON  |    |    |    |    |    |    |    | 1  |    |
| Voltage follower circuits: OFF  |    |    |    |    |    |    |    |    | 0  |
| Voltage follower circuits: ON   |    |    |    |    |    |    |    |    | 1  |

- Voltage V1 adjustment internal resistor ratio set

This command sets the ratios of the internal resistors for adjusting the voltage V1.

| Resistor ratio | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----------------|----|----|----|----|----|----|----|----|----|
| Small          | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
|                |    |    |    |    |    |    | 0  | 0  | 1  |
|                |    |    |    |    |    |    | 0  | 1  | 0  |
| ⋮              |    |    |    |    |    |    | ⋮  | ⋮  | ⋮  |
|                |    |    |    |    |    |    | 1  | 1  | 0  |
| Large          |    |    |    |    |    |    | 1  | 1  | 1  |

- Electronic potentiometer (2-Byte command)

This command is used for controlling the LCD drive voltage V1 output by the voltage adjustment circuit of the internal LCD power supply and for adjusting the intensity of the LCD display.

This is a two-byte command consisting of the Electronic potentiometer mode set command and the Electronic potentiometer register set command, both of which should always be issued successively as a pair.

- Electronic potentiometer mode set (Write)

When this command is issued, the electronic potentiometer register set command becomes effective.

Once the electronic potentiometer mode is set, it is not possible to issue any command other than the Electronic potentiometer register set command. This condition is released after data has been set in the register using the Electronic potentiometer register set command.

| A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|----|
| 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 1  |

- Electronic potentiometer register set (Write)

By setting a 6-bit data in the electronic potentiometer register using this command, it is possible to set the LCD drive voltage V1 to one of the 64 voltage levels.


The electronic potentiometer mode is released after some data has been set in the electronic potentiometer register using this command.

| V1    | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------|----|----|----|----|----|----|----|----|----|
| Small | 0  | *  | *  | 0  | 0  | 0  | 0  | 0  | 1  |
|       |    |    |    | 0  | 0  | 0  | 0  | 1  | 0  |
|       |    |    |    | 0  | 0  | 0  | 0  | 1  | 1  |
| ⋮     |    |    |    | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  |
|       |    |    |    | 1  | 1  | 1  | 1  | 1  | 0  |
| Large |    |    |    | 1  | 1  | 1  | 1  | 1  | 1  |

\*: Invalid bit

Set the data (\*, \*, 1, 0, 0, 0, 0, 0) when not using the electronic potentiometer function.

Sequence of setting the electronic potentiometer register:

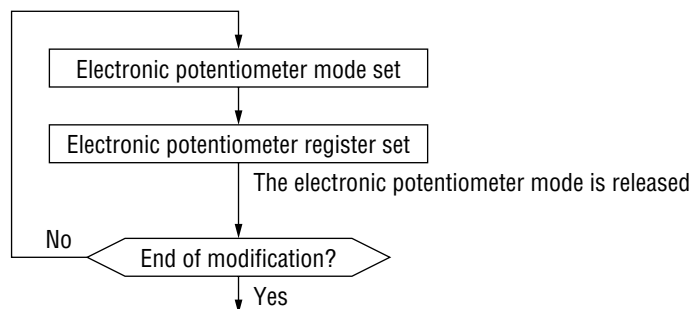

- Static indicator (2-Byte command)

This command is used for controlling the static drive type indicator display.

Static indicator display is controlled only by this command and is independent of all other display control commands. One of the electrodes for driving the static indicator LCD is connected to the pin FR and the other pin is connected to the pin FRS. It is recommended to place the wiring pattern for the electrodes for static indicators far from those of the electrodes for dynamic drive. If these interconnection patterns are too close to each other, they may cause deterioration of the LCD device and the electrodes.

Since the Static indicator ON command is a two-byte command used in combination with the static indicator register set command, these two commands should always be used together. (The Static indicator OFF command is a single byte command.)

- Static indicator ON/OFF (Write)

When the Static indicator ON command is issued, the Static indicator register set command becomes effective. Once the Static indicator ON command is issued, it is not possible to issue any command other than the Static indicator register set command. This condition is released only after some data is written into the register using the static indicator register set command.

| Static indicator | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------------------|----|----|----|----|----|----|----|----|----|
| OFF              | 0  | 1  | 0  | 1  | 0  | 1  | 1  | 0  | 0  |
| ON               |    |    |    |    |    |    |    |    | 1  |


- Static indicator register set (Write)

This command is used to set data in the 2-bit static indicator register thereby setting the blinking state of the static indicator.

| Indicator                               | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------------------------------------|----|----|----|----|----|----|----|----|----|
| OFF                                     | 0  | *  | *  | *  | *  | *  | *  | 0  | 0  |
| ON (Blinking at about 1sec intervals)   |    |    |    |    |    |    |    | 0  | 1  |
| ON (Blinking at about 0.5sec intervals) |    |    |    |    |    |    |    | 1  | 0  |
| ON (Continuously ON)                    |    |    |    |    |    |    |    | 1  | 1  |

\*: Invalid bits

Sequence of setting the static indicator register:

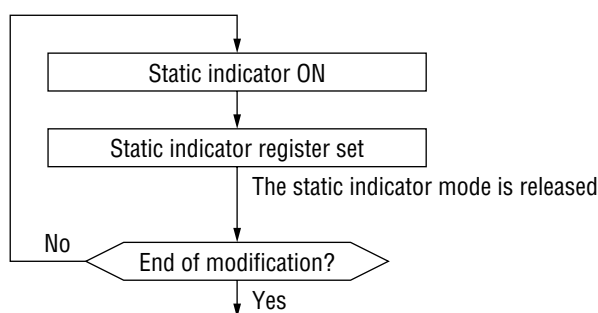

- Line reversal drive (2-byte command) / frame reversal drive selection

It is possible to select the LCD driving method between the line reversal drive method and the frame reversal drive methods. When the line reversal method is selected, the command should be used as a two-byte command in combination with the Line reversal number set command and hence these two commands should always be issued successively.

- LCD Drive method set (Write)

This command sets the LCD driving method.

Once the line reversal method has been set, no command other than the Line reversal number set command is accepted. This state is released only after some data is set in the register using the Line reversal number set command.

The frame reversal set command is a single byte command.

|                | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----------------|----|----|----|----|----|----|----|----|----|
| Frame reversal | 0  | 1  | 1  | 0  | 1  | 0  | *  | *  | *  |
| Line reversal  |    |    |    |    |    | 1  | *  | *  | *  |

\*: Invalid bits

- Line reversal number set (Write)

When the line reversal method has been set using the LCD drive method set command, it is necessary to set immediately the number of reversed lines.

| Number of reversed lines | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|--------------------------|----|----|----|----|----|----|----|----|----|
| 1                        | 0  | *  | *  | *  | 0  | 0  | 0  | 0  | 0  |
| 2                        |    |    |    |    | 0  | 0  | 0  | 0  | 1  |
| ⋮                        |    |    |    |    | ⋮  | ⋮  | ⋮  | ⋮  | ⋮  |
| 31                       |    |    |    |    | 1  | 1  | 1  | 1  | 0  |
| 32                       |    |    |    |    | 1  | 1  | 1  | 1  | 1  |


\*: Invalid bits

- Power save (Compound command)

The LSI goes into the power save state when the Display all-on ON command is issued when the LSI is in the display OFF state, and it is possible to greatly reduce the current consumption in this state. The power save state is of two types, namely, the sleep state and the standby state, and the LSI goes into the standby state when the static indicator has been made ON.

The display data and the operating mode just before entering the power save mode are retained in both the sleep state and the standby state, and also the MPU can access the display data RAM in these states.

The power save mode is released by issuing the Display all-on OFF command.

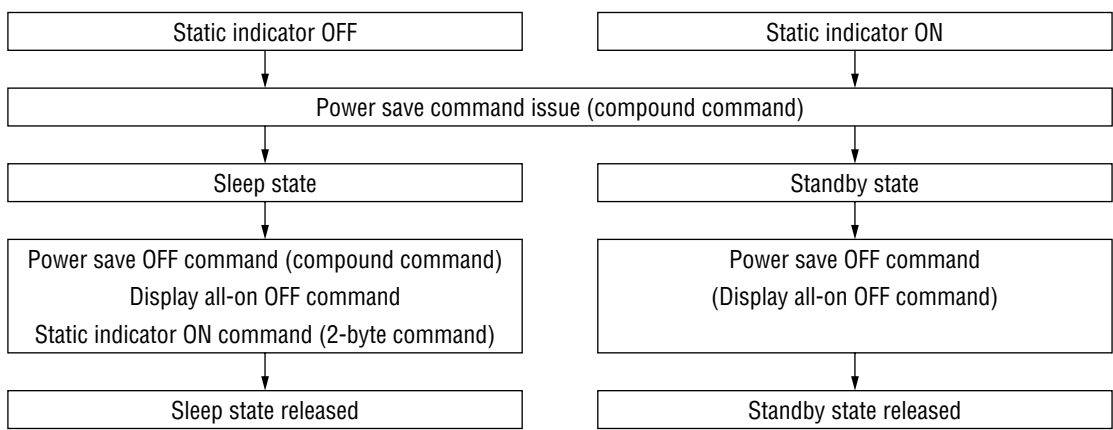

- Sleep state

In this state, all the operations of the LCD display system are stopped and it is possible to reduce the current consumption to a level near the idle state current consumption unless there are accesses from the MPU. The internal conditions in the sleep state are as follows:

- (1) The oscillator circuit and the LCD power supply are stopped.
- (2) All the LCD drive circuits are stopped and the segment and common driver outputs will be at the  $V_{SS}$  level.

- Standby state

All operations of the dynamic LCD display section are stopped, only the static display circuits for the indicators operate and hence the current consumption will be the minimum necessary for static drive. The internal conditions in the standby state are as follows:

- (1) The power supply circuit for LCD drive is stopped. The oscillator circuit will be operating.
- (2) The LCD drive circuits for dynamic display are stopped and the segment and common driver outputs will be at the  $V_{SS}$  level. The static display section will be operating.

When a reset command is issued in the standby state, the LSI goes into the sleep state.

- NOP (Write)

This is a No Operation command.

| A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|----|
| 0  | 1  | 1  | 1  | 0  | 0  | 0  | 1  | 1  |

- Test (Write)

This is a command for testing the IC chip. Do not use this command. When the test command is issued by mistake, this state can be released by issuing a NOP command. This command will be ineffective if the TEST0 pin is open or at the "L" level.

| A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|----|
| 0  | 1  | 1  | 1  | 1  | *  | *  | *  | *  |

\*: Invalid bits

## LIST OF COMMANDS

| No | Operation                                                                | Dn                                               |        |        |        | Comment                                                                                                                                |
|----|--------------------------------------------------------------------------|--------------------------------------------------|--------|--------|--------|----------------------------------------------------------------------------------------------------------------------------------------|
|    |                                                                          | 7 6 5 4 3 2 1 0                                  | A0     | RD     | WR     |                                                                                                                                        |
| 1  | Display OFF<br>Display ON                                                | 1 0 1 0 1 1 1 0<br>1                             | 0<br>0 | 1<br>1 | 0<br>0 | LCD Display:<br>OFF When D0 = 0 ON When D0 = 1                                                                                         |
| 2  | Display start line set                                                   | 01Address                                        | 0      | 1      | 0      | The display starting line address in the display RAM is set.                                                                           |
| 3  | Page address set                                                         | 1011Address                                      | 0      | 1      | 0      | The page address in the display RAM is set.                                                                                            |
| 4  | Column address set<br>(upper bits)<br>Column address set<br>(lower bits) | 0001Address<br>(upper)<br>0000Address<br>(lower) | 0<br>0 | 1<br>1 | 0<br>0 | The upper 4 bits of the column address in the display RAM is set.<br>The lower 4 bits of the column address in the display RAM is set. |
| 5  | Status read                                                              | Status0000                                       | 0      | 0      | 1      | The status information is read out from the upper 4 bits.                                                                              |
| 6  | Display data write                                                       | Write data                                       | 1      | 1      | 0      | Writes data to the display data RAM.                                                                                                   |
| 7  | Display data read                                                        | Read data                                        | 1      | 0      | 1      | Reads data from the display data RAM.                                                                                                  |
| 8  | ADC Select Forward<br>Reverse                                            | 1 0 1 0 0 0 0 0<br>1                             | 0<br>0 | 1<br>1 | 0<br>0 | Correspondence between the display data RAM address and SEG output.<br>Forward when D0 = 0;<br>reverse when D0 = 1                     |
| 9  | Normal display<br>Reverse display                                        | 1 0 1 0 0 1 1 0<br>1                             | 0<br>0 | 1<br>1 | 0<br>0 | Normal or reverse LCD display mode.<br>Normal mode when D0 = 0;<br>reverse when D0 = 1                                                 |
| 10 | LCD Normal display<br>All-on display                                     | 1 0 1 0 0 1 0 0<br>1                             | 0<br>0 | 1<br>1 | 0<br>0 | LCD<br>Normal display when D0 = 0;<br>all-on display when D0 = 1                                                                       |
| 11 | LCD Bias set                                                             | 1 0 1 0 0 0 1 0<br>1                             | 0<br>0 | 1<br>1 | 0<br>0 | Sets the LCD drive voltage bias ratio.<br>ML9050: 1/9 when D0 = 0 and 1/7 when D0 = 1<br>ML9051: 1/8 when D0 = 0 and 1/6 when D0 = 1   |
| 12 | Read-modify-write                                                        | 1 1 1 0 0 0 0 0                                  | 0      | 1      | 0      | Incrementing column address<br>During a write: +1; during a read: 0                                                                    |
| 13 | End                                                                      | 1 1 1 0 1 1 1 0                                  | 0      | 1      | 0      | Releases the read-modify-write state.                                                                                                  |
| 14 | Reset                                                                    | 1 1 1 0 0 0 1 0                                  | 0      | 1      | 0      | Internal reset                                                                                                                         |
| 15 | Common output state select                                               | 1 1 0 0 0 * * *<br>1 * * *                       | 0<br>0 | 1<br>1 | 0<br>0 | Selects the COM output scanning direction.<br>Forward when D3 = 0;<br>reverse when D3 = 1                                              |
| 16 | Power control set                                                        | 0 0 1 0 1<br>Operating state                     | 0      | 1      | 0      | Selects the operating state of the internal power supply.                                                                              |
| 17 | Voltage V1 adjustment<br>internal resistor ratio set                     | 0 0 1 0 0<br>Resistor ratio setting              | 0      | 1      | 0      | Selects the internal resistor ratio.                                                                                                   |

| No | Operation                           | Dn                               |    |    |    | Comment                                                              |
|----|-------------------------------------|----------------------------------|----|----|----|----------------------------------------------------------------------|
|    |                                     | 7 6 5 4 3 2 1 0                  | A0 | RD | WR |                                                                      |
| 18 | Electronic potentiometer mode set   | 1 0 0 0 0 0 0 1                  | 0  | 1  | 0  | Sets the V1 output voltage in the electronic potentiometer register. |
|    | External potentiometer register set | **Electronic potentiometer value | 0  | 1  | 0  |                                                                      |
| 19 | Static indicator                    | 1 0 1 0 1 1 0 0                  | 0  | 1  | 0  | OFF When D0 = 0                                                      |
|    | ON/OFF                              | 1                                | 0  | 1  | 0  | ON When D0 = 1                                                       |
|    | Static indicator register set       | *****State                       | 0  | 1  | 0  | Sets the blinking state.                                             |
| 20 | LCD Drive method set                | 1 1 0 1 0 * * *                  | 0  | 1  | 0  | Frame reversal when D3 = 0.                                          |
|    |                                     | 1 * * *                          | 0  | 1  | 0  | Line reversal when D3 = 1.                                           |
|    | Line reversal number set            | ***Line number                   | 0  | 1  | 0  | Sets the number of lines reversed.                                   |
| 21 | Power save                          |                                  |    |    |    | Compound command of Display OFF and Display all-on.                  |
| 22 | NOP                                 | 1 1 1 0 0 0 1 1                  | 0  | 1  | 0  | The "No Operation" command.                                          |
| 23 | Test                                | 1 1 1 1 * * * *                  | 0  | 1  | 0  | The command for factory testing of the IC chip.                      |


\*: Invalid bits



## DESCRIPTION OF COMMANDS

### Examples of settings for the instructions (reference examples)

- Initial setting

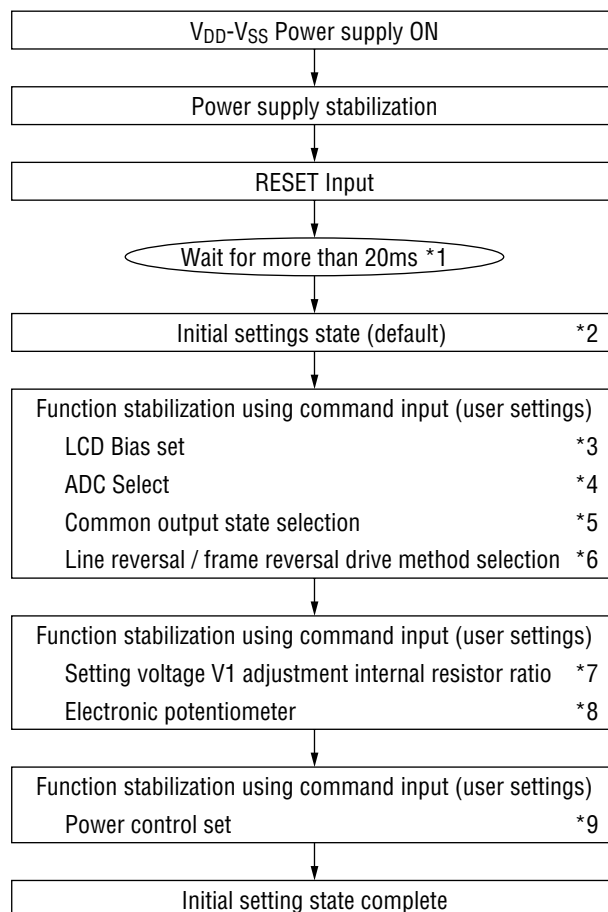

Notes: Sections to be referred to


- \*1: Stabilization time of the internal oscillator
- \*2: Function description "Reset circuit"
- \*3: Command description "LCD Bias set"
- \*4: Command description "ADC Select"
- \*5: Command description "Common output state select"
- \*6: Command description "Line reversal/frame reversal drive select"
- \*7: Function description "Power supply circuit", Command description "Voltage V1 adjustment internal resistor ratio set"
- \*8: Function description "Power supply circuit", Command description "Electronic potentiometer"
- \*9: Function description "Power supply circuit", Command description "Power control set"

## Examples of settings for the instructions (reference examples)

- Initial setting

Note: After the power is switched ON, this LSI outputs at the LCD drive output pins SEG and COM the  $V_{SS}$  potential. If any charge is remaining on the smoothing capacitors connected between the  $V_{OUT}$  pin and the pins for the LCD drive voltage outputs (V1 to V5), there may be some abnormality in the display such as temporary blacking out of the display screen when the power is switched ON. The following procedure is recommended for avoiding such abnormalities at the time the power is switched ON.

- When using the internal power supply immediately after power-on

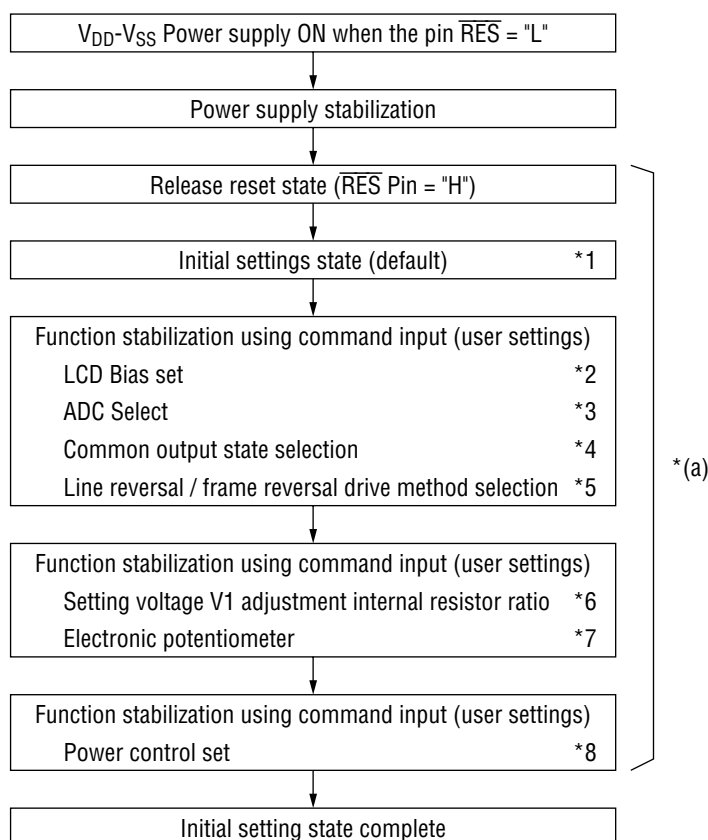


\*(a): Carry out power control set within 5ms after releasing the reset state. The 5ms duration changes depending on the panel characteristics and the value of the smoothing capacitor. We recommend verification of operation using an actual unit.

Notes: Sections to be referred to

- \*1: Function description "Reset circuit"
- \*2: Command description "LCD Bias set"
- \*3: Command description "ADC Select"
- \*4: Command description "Common output state select"
- \*5: Command description "Line reversal/frame reversal drive select"
- \*6: Function description "Power supply circuit", Command description "Voltage V1 adjustment internal resistor ratio set"
- \*7: Function description "Power supply circuit", Command description "Electronic potentiometer"
- \*8: Function description "Power supply circuit", Command description "Power control set"

- When not using the internal power supply immediately after power-on

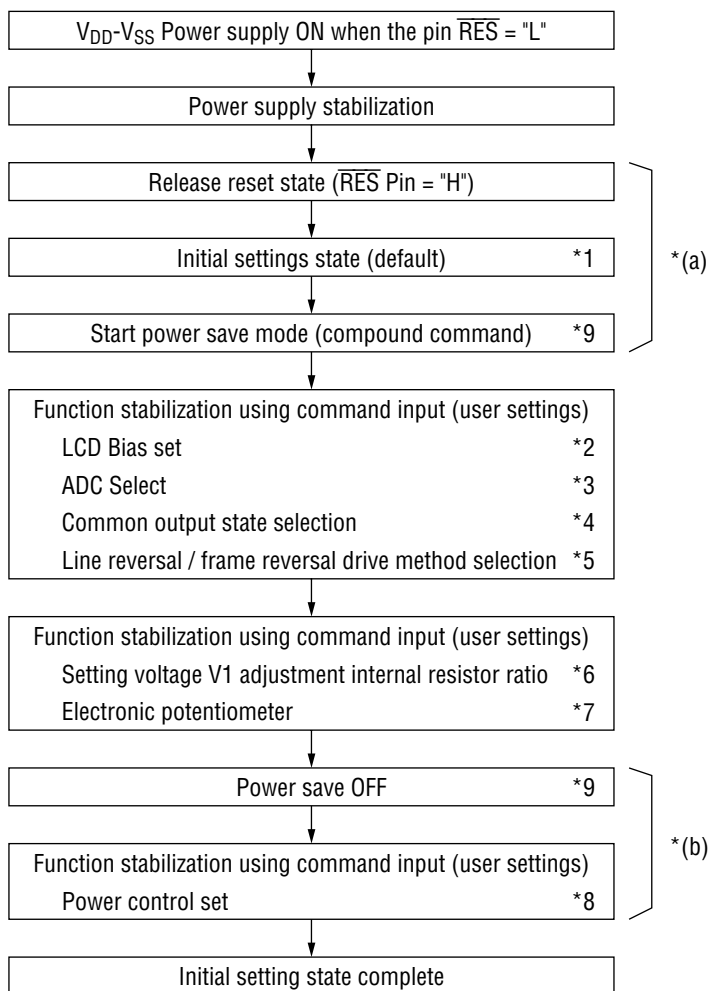

\*(a): Enter the power save state within 5ms after releasing the reset state.


\*(b): Carry out power control set within 5ms after releasing the power save state.

The 5ms duration in \*(a) and \*(b) changes depending on the panel characteristics and the value of the smoothing capacitor. We recommend verification of operation using an actual unit.

Notes: Sections to be referred to

- \*1: Function description "Reset circuit"
- \*2: Command description "LCD Bias set"
- \*3: Command description "ADC Select"
- \*4: Command description "Common output state select"
- \*5: Command description "Line reversal/frame reversal drive select"
- \*6: Function description "Power supply circuit", Command description "Voltage V1 adjustment internal resistor ratio set"
- \*7: Function description "Power supply circuit", Command description "Electronic potentiometer"
- \*8: Function description "Power supply circuit", Command description "Power control set"
- \*9: The power save state can be either the sleep state or the standby state.  
Command description "Power save (compound command)"

- Data display

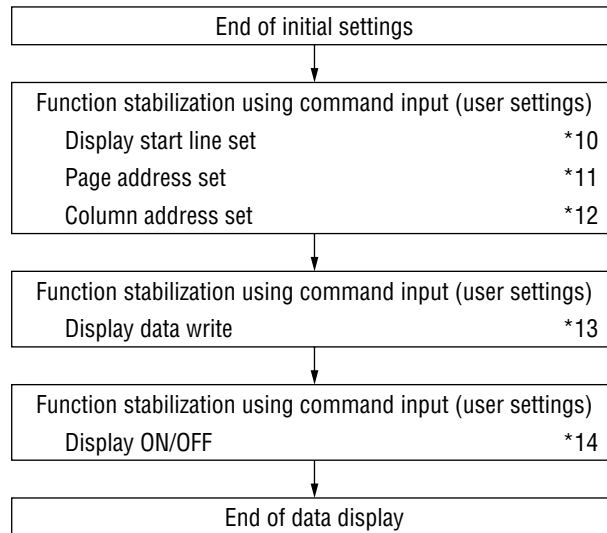

Notes: Sections to be referred to

\*10: Command description "Display start line set"


\*11: Command description "Page address set"

\*12: Command description "Column address set"

\*13: Command description "Display data write"

\*14: Command description "Display ON/OFF"

- Power supply OFF (\*15)

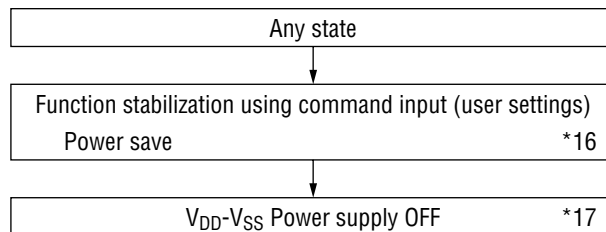

Notes: Sections to be referred to

\*15: The power supply of this LSI is switched OFF after switching OFF the internal power supply. Function description "Power supply circuit"


If the power supply of this LSI is switched OFF when the internal power supply is still ON, since the state of supplying power to the built-in LCD drive circuits continues for a short duration, it may affect the display quality of the LCD panel. Always follow the power supply switching OFF sequence.

\*16: Command description "Power save"

\*17: Do not enter Reset when switching the power supply OFF.

- Refresh

Use the refresh sequence at regular intervals.

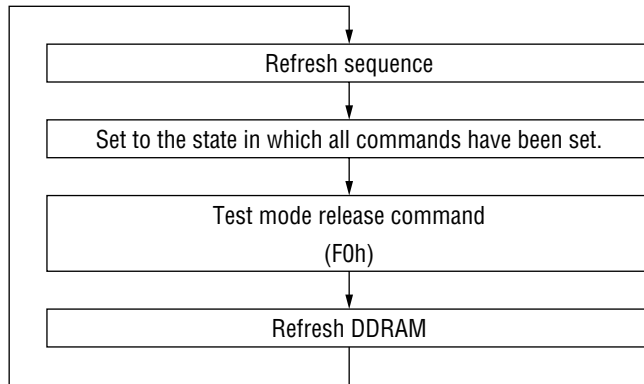

## ABSOLUTE MAXIMUM RATINGS


 $V_{SS} = 0\text{ V}$ 

| Parameter                            | Symbol    | Condition                | Rated value          | Unit             | Applicable pins      |
|--------------------------------------|-----------|--------------------------|----------------------|------------------|----------------------|
| Power supply voltage                 | $V_{DD}$  | $T_a = 25^\circ\text{C}$ | -0.3 to +7           | V                | $V_{DD}$ , $V_{SS}$  |
| Bias voltage                         | $V_{BI}$  | $T_a = 25^\circ\text{C}$ | -0.3 to +20          | V                | $V_{OUT}$ , V1 to V5 |
| Voltage multiplier reference voltage | $V_{IN}$  | 6-Times multiplication   | -0.3 to +3.3         | V                | $V_{IN}$ , $V_{SS}$  |
|                                      |           | 7-Times multiplication   | -0.3 to +2.8         |                  |                      |
| Input voltage                        | $V_I$     | $T_a = 25^\circ\text{C}$ | -0.3 to $V_{DD}+0.3$ | V                | All inputs           |
| Storage temperature range            | $T_{stg}$ | TCP                      | -55 to +100          | $^\circ\text{C}$ | —                    |
|                                      |           | Chip                     | -55 to +125          |                  |                      |

Ta: Ambient temperature

## RECOMMENDED OPERATING CONDITIONS

| Parameter                            | Symbol     | Condition                            | Rated value | Unit             | Applicable pins      |
|--------------------------------------|------------|--------------------------------------|-------------|------------------|----------------------|
| Power supply voltage                 | $V_{DD}$   | —                                    | 1.8 to 5.5  | V                | $V_{DD}$ , $V_{SS}$  |
| Bias voltage                         | $V_{BI}$   | —                                    | 6 to 18     | V                | $V_{OUT}$ , V1 to V5 |
| Voltage multiplier reference voltage | $V_{IN}$   | 6-Times multiplication               | 1.8 to 3    | V                | $V_{IN}$ , $V_{SS}$  |
|                                      |            | 7-Times multiplication               | 1.8 to 2.5  |                  |                      |
| Voltage multiplier output voltage    | $V_{OUT}$  |                                      | 18          | V                | $V_{OUT}$            |
| Reference voltage                    | $V_{REG0}$ | $-0.05\%/^\circ\text{C} \text{ }^*1$ | (3.0)       | V                | —                    |
|                                      | $V_{REG1}$ | $-0.2\%/^\circ\text{C} \text{ }^*1$  |             |                  |                      |
| Operating temperature range          | $T_{op}$   |                                      | -40 to +85  | $^\circ\text{C}$ | —                    |

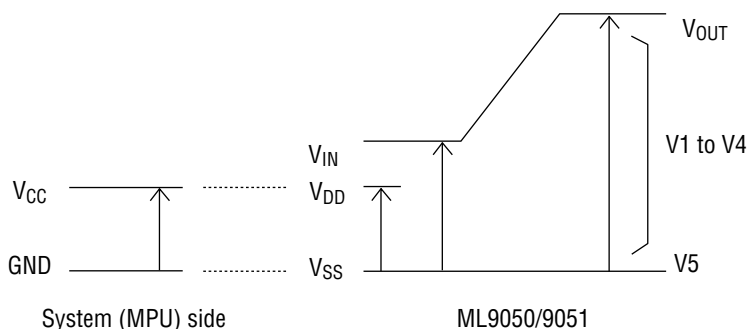\*1:  $T_a = 25^\circ\text{C}$ Note 1: The voltages  $V_{DD}$ , V1 to V5, and  $V_{OUT}$  are values taking  $V_{SS} = 0\text{ V}$  as the reference.Note 2: The highest bias potential is V1 and the lowest is  $V_{SS}$ .Note 3: Always maintain the relationship  $V1 \geq V2 \geq V3 \geq V4 \geq V5 \geq V_{SS}$  among these voltages.



## ELECTRICAL CHARACTERISTICS

## DC Characteristics

[Ta = -40 to +85°C]

| Parameter                | Symbol               | Condition                | Min       | Typ | Max       | Unit | Applicable pins           |
|--------------------------|----------------------|--------------------------|-----------|-----|-----------|------|---------------------------|
| "H" Input voltage        | V <sub>IH</sub>      |                          | 0.8 × VDD |     | VDD       | V    | *1                        |
| "L" Input voltage        | V <sub>IL</sub>      |                          | VSS       |     | 0.2 × VDD |      |                           |
| "H" Output voltage       | V <sub>OH</sub>      | I <sub>OH</sub> = -0.5mA | 0.8 × VDD |     | VDD       | V    | *2                        |
| "L" Output voltage       | V <sub>OL</sub>      | I <sub>OL</sub> = 0.5mA  | VSS       |     | 0.2 × VDD |      |                           |
| "H" Input current        | I <sub>IH</sub>      | V <sub>I</sub> = VDD     | -1.0      |     | 1.0       | μA   | *3                        |
| "L" Input current        | I <sub>IL</sub>      | V <sub>I</sub> = 0 V     | -3.0      |     | 3.0       |      | *4                        |
| LCD Driver ON resistance | R <sub>ON</sub>      | I <sub>o</sub> = ±50 μA  |           |     | 10        | kΩ   | SEG1 to 132<br>COM1 to 97 |
| Current consumption      | I <sub>DDs</sub>     | Standby                  |           |     | 5         | μA   | V <sub>DD</sub>           |
| Input pin capacitance    | C <sub>IN</sub>      | Ta = 25°C,<br>f = 1MHz   |           | 5   | 8         | PF   |                           |
| Oscillator frequency     | Internal oscillation | Ta = 25°C                | 18        | 22  | 26        | kHz  | *6                        |
|                          | External input       | ML9050                   | 18        | 22  | 26        | kHz  | CL*6                      |
|                          | Internal oscillation | Ta = 25°C                | 27        | 33  | 39        | kHz  | *6                        |
|                          | External input       | ML9051                   | 14        | 17  | 20        | kHz  | CL*6                      |

- \*1: A0, D0 to D5, D6 (SCL), D7 (SI),  $\overline{RD}$  (E),  $\overline{WR}$  (R/ $\overline{W}$ ),  $\overline{CS1}$ , CS2, CLS, CL, FR, M/ $\overline{S}$ , C86, P/ $\overline{S}$ , DOF,  $\overline{RES}$ , IRS,  $\overline{HPM}$  Pins
- \*2: D0 to D7, FR, FRS,  $\overline{DOF}$ , CL Pins  
DOF,  $\overline{RES}$ , IRS,  $\overline{HPM}$  Pins
- \*3: A0,  $\overline{RD}$  (E),  $\overline{WR}$  (R/ $\overline{W}$ ),  $\overline{CS1}$ , CS2, CLS, M/ $\overline{S}$ , C86, P/ $\overline{S}$ ,  $\overline{RES}$ , IRS,  $\overline{HPM}$  Pins
- \*4: Applicable to the pins D0 to D5, D6 (SCL), D7 (SI), CL, FR,  $\overline{DOF}$  in the high impedance state.
- \*5: COM1 to COM65 in the ML9050, COM1 to COM65 in the ML9051.
- \*6: See Table 24 for the relationship between the oscillator frequency and the frame frequency.

**Table 24. Relationship among the oscillator frequency (f<sub>OSC</sub>), display clock frequency (f<sub>LCDCK</sub>), and LCD frame frequency (f<sub>FR</sub>)**

|        | Parameter                                | Display clock frequency (f <sub>LCDCK</sub> ) | LCD frame frequency (f <sub>FR</sub> ) |
|--------|------------------------------------------|-----------------------------------------------|----------------------------------------|
| ML9050 | When the internal oscillator is used     | f <sub>OSC</sub> /4                           | f <sub>OSC</sub> /4 × 65               |
|        | When the internal oscillator is not used | External input (f <sub>LCDCK</sub> )          | f <sub>LCDCK</sub> /260                |
| ML9051 | When the internal oscillator is used     | f <sub>OSC</sub> /8                           | f <sub>OSC</sub> /8 × 49               |
|        | When the internal oscillator is not used | External input (f <sub>LCDCK</sub> )          | f <sub>LCDCK</sub> /196                |

- Operating current consumption value ( $T_a = 25^\circ\text{C}$ )

(1) During display operation, internal power supply OFF (The current consumption of the entire IC when an external power supply is used)

Display mode: All-white

| Model  | Symbol          | Condition                                        | Rated value |      |     | Unit | Remarks |
|--------|-----------------|--------------------------------------------------|-------------|------|-----|------|---------|
|        |                 |                                                  | Min         | Typ  | Max |      |         |
| ML9050 | I <sub>DD</sub> | V <sub>DD</sub> = 5 V, V1-V <sub>SS</sub> = 11 V |             | (18) |     | μA   |         |
|        |                 | V <sub>DD</sub> = 3 V, V1-V <sub>SS</sub> = 11 V |             | (16) |     |      |         |
| ML9051 |                 | V <sub>DD</sub> = 3 V, V1-V <sub>SS</sub> = 11 V |             | (13) |     |      |         |
|        |                 | V <sub>DD</sub> = 5 V, V1-V <sub>SS</sub> = 8 V  |             | (11) |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, V1-V <sub>SS</sub> = 8 V  |             | (9)  |     |      |         |

Display mode: Checker pattern

| Model  | Symbol          | Condition                                        | Rated value |     |     | Unit | Remarks |
|--------|-----------------|--------------------------------------------------|-------------|-----|-----|------|---------|
|        |                 |                                                  | Min         | Typ | Max |      |         |
| ML9050 | I <sub>DD</sub> | V <sub>DD</sub> = 5 V, V1-V <sub>SS</sub> = 11 V |             | TBD |     | μA   |         |
|        |                 | V <sub>DD</sub> = 3 V, V1-V <sub>SS</sub> = 11 V |             | TBD |     |      |         |
| ML9051 |                 | V <sub>DD</sub> = 3 V, V1-V <sub>SS</sub> = 11 V |             | TBD |     |      |         |
|        |                 | V <sub>DD</sub> = 5 V, V1-V <sub>SS</sub> = 8 V  |             | TBD |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, V1-V <sub>SS</sub> = 8 V  |             | TBD |     |      |         |

(2) During display operation, internal power supply ON

Display mode: All-white

| Model  | Symbol          | Condition                                                                        |                 | Rated value |      |     | Unit | Remarks |
|--------|-----------------|----------------------------------------------------------------------------------|-----------------|-------------|------|-----|------|---------|
|        |                 |                                                                                  |                 | Min         | Typ  | Max |      |         |
| ML9050 | I <sub>DD</sub> | V <sub>DD</sub> = 5 V, 3-times voltage multiplication, V1-V <sub>SS</sub> = 11 V | Normal mode     |             | (67) |     | μA   |         |
|        |                 |                                                                                  | High power mode |             | TBD  |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, 4-times voltage multiplication, V1-V <sub>SS</sub> = 11 V | Normal mode     |             | (81) |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD  |     |      |         |
| ML9051 |                 | V <sub>DD</sub> = 5 V, 3-times voltage multiplication, V1-V <sub>SS</sub> = 8 V  | Normal mode     |             | (35) |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD  |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, 4-times voltage multiplication, V1-V <sub>SS</sub> = 8 V  | Normal mode     |             | (43) |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD  |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, 4-times voltage multiplication, V1-V <sub>SS</sub> = 11 V | Normal mode     |             | (72) |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD  |     |      |         |

Display mode: Checker pattern


| Model  | Symbol          | Condition                                                                        |                 | Rated value |     |     | Unit | Remarks |
|--------|-----------------|----------------------------------------------------------------------------------|-----------------|-------------|-----|-----|------|---------|
|        |                 |                                                                                  |                 | Min         | Typ | Max |      |         |
| ML9050 | I <sub>DD</sub> | V <sub>DD</sub> = 5 V, 6-times voltage multiplication, V1-V <sub>SS</sub> = 11 V | Normal mode     |             | TBD |     | μA   |         |
|        |                 |                                                                                  | High power mode |             | TBD |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, 7-times voltage multiplication, V1-V <sub>SS</sub> = 11 V | Normal mode     |             | TBD |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD |     |      |         |
| ML9051 | I <sub>DD</sub> | V <sub>DD</sub> = 5 V, 6-times voltage multiplication, V1-V <sub>SS</sub> = 8 V  | Normal mode     |             | TBD |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, 7-times voltage multiplication, V1-V <sub>SS</sub> = 8 V  | Normal mode     |             | TBD |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD |     |      |         |
|        |                 | V <sub>DD</sub> = 3 V, 7-times voltage multiplication, V1-V <sub>SS</sub> = 11 V | Normal mode     |             | TBD |     |      |         |
|        |                 |                                                                                  | High power mode |             | TBD |     |      |         |

- Power save mode current consumption, V<sub>SS</sub> = 0 V, V<sub>DD</sub> = 3 V±10%

| Parameter            | Symbol            | Condition | Rated value |       |     | Unit | Remarks |
|----------------------|-------------------|-----------|-------------|-------|-----|------|---------|
|                      |                   |           | Min         | Typ   | Max |      |         |
| ML9050 Sleep state   | I <sub>DDS1</sub> |           |             | (0.1) |     | μA   |         |
| ML9050 Standby state | I <sub>DDS2</sub> |           |             | (4)   |     |      |         |
| ML9051 Sleep state   | I <sub>DDS1</sub> |           |             | (0.1) |     |      |         |
| ML9051 Standby state | I <sub>DDS2</sub> |           |             | (4)   |     |      |         |

## Timing Characteristics

- System bus read/write characteristics 1 (80-series MPU)

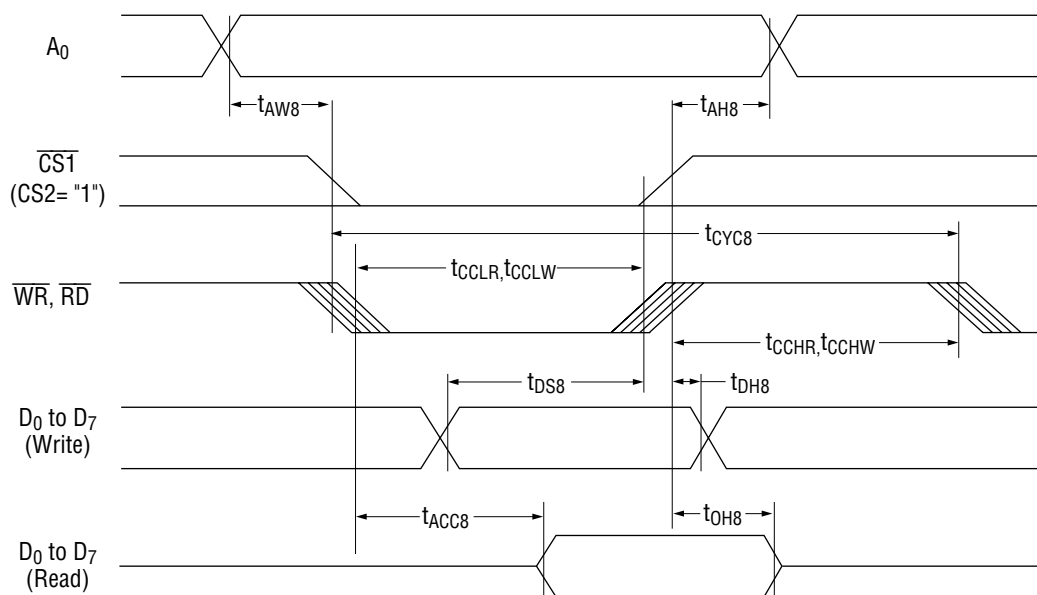

[ $V_{DD} = 4.5 \text{ V to } 5.5 \text{ V}$ ,  $T_a = -40 \text{ to } +85^\circ\text{C}$ ]

| Parameter                                 | Applicable pins | Symbol     | Condition  | Rated value |     | Unit |
|-------------------------------------------|-----------------|------------|------------|-------------|-----|------|
|                                           |                 |            |            | Min         | Max |      |
| Address hold time                         | A0              | $t_{AH8}$  |            | 0           | —   | ns   |
| Address setup time                        | A0              | $t_{AW8}$  |            | 0           | —   |      |
| System cycle time                         | A0              | $t_{CYC8}$ |            | 166         | —   |      |
| Control L pulse width ( $\overline{WR}$ ) | $\overline{WR}$ | $t_{CCLW}$ |            | 30          | —   |      |
| Control L pulse width ( $\overline{RD}$ ) | $\overline{RD}$ | $t_{CCLR}$ |            | 70          | —   |      |
| Control H pulse width ( $\overline{WR}$ ) | $\overline{WR}$ | $t_{CCHW}$ |            | 30          | —   |      |
| Control H pulse width ( $\overline{RD}$ ) | $\overline{RD}$ | $t_{CCHR}$ |            | 30          | —   |      |
| Data setup time                           | D0 to D7        | $t_{DS8}$  |            | 30          | —   |      |
| Data hold time                            |                 | $t_{DH8}$  |            | 10          | —   |      |
| $\overline{RD}$ Access time               |                 | $t_{ACC8}$ | CL = 100pF | —           | 70  |      |
| Output disable time                       |                 | $t_{OH8}$  |            | 5           | 50  |      |

[V<sub>DD</sub> = 2.7 V to 4.5 V, T<sub>a</sub> = -40 to +85°C]

| Parameter                                 | Applicable pins | Symbol            | Condition  | Rated value |     | Unit |
|-------------------------------------------|-----------------|-------------------|------------|-------------|-----|------|
|                                           |                 |                   |            | Min         | Max |      |
| Address hold time                         | A0              | t <sub>AH8</sub>  |            | 0           | —   | ns   |
| Address setup time                        |                 | t <sub>AW8</sub>  |            | 0           | —   |      |
| System cycle time                         | A0              | t <sub>CYC8</sub> |            | 300         | —   |      |
| Control L pulse width ( $\overline{WR}$ ) | $\overline{WR}$ | t <sub>CCLW</sub> |            | 60          | —   |      |
| Control L pulse width ( $\overline{RD}$ ) | $\overline{RD}$ | t <sub>CCLR</sub> |            | 120         | —   |      |
| Control H pulse width ( $\overline{WR}$ ) | $\overline{WR}$ | t <sub>CCHW</sub> |            | 60          | —   |      |
| Control H pulse width ( $\overline{RD}$ ) | $\overline{RD}$ | t <sub>CCHR</sub> |            | 60          | —   |      |
| Data setup time                           | D0 to D7        | t <sub>DS8</sub>  |            | 40          | —   |      |
| Data hold time                            |                 | t <sub>DH8</sub>  |            | 15          | —   |      |
| $\overline{RD}$ Access time               |                 | t <sub>ACC8</sub> | CL = 100pF | —           | 140 |      |
| Output disable time                       |                 | t <sub>OH8</sub>  |            | 10          | 100 |      |

[V<sub>DD</sub> = 1.8 V to 2.7 V, T<sub>a</sub> = -40 to +85°C]

| Parameter                                 | Applicable pins | Symbol            | Condition  | Rated value |     | Unit |
|-------------------------------------------|-----------------|-------------------|------------|-------------|-----|------|
|                                           |                 |                   |            | Min         | Max |      |
| Address hold time                         | A0              | t <sub>AH8</sub>  |            | 0           | —   | ns   |
| Address setup time                        |                 | t <sub>AW8</sub>  |            | 0           | —   |      |
| System cycle time                         | A0              | t <sub>CYC8</sub> |            | 1000        | —   |      |
| Control L pulse width ( $\overline{WR}$ ) | $\overline{WR}$ | t <sub>CCLW</sub> |            | 120         | —   |      |
| Control L pulse width ( $\overline{RD}$ ) | $\overline{RD}$ | t <sub>CCLR</sub> |            | 240         | —   |      |
| Control H pulse width ( $\overline{WR}$ ) | $\overline{WR}$ | t <sub>CCHW</sub> |            | 120         | —   |      |
| Control H pulse width ( $\overline{RD}$ ) | $\overline{RD}$ | t <sub>CCHR</sub> |            | 120         | —   |      |
| Data setup time                           | D0 to D7        | t <sub>DS8</sub>  |            | 80          | —   |      |
| Data hold time                            |                 | t <sub>DH8</sub>  |            | 30          | —   |      |
| $\overline{RD}$ Access time               |                 | t <sub>ACC8</sub> | CL = 100pF | —           | 280 |      |
| Output disable time                       |                 | t <sub>OH8</sub>  |            | 10          | 200 |      |


Note 1: The input signal rise and fall times are specified as 15ns or less.

When using the system cycle time for fast speed, the specified values are (tr+tf) ≤ (t<sub>CYC8</sub>-t<sub>CCLW</sub>-t<sub>CCHW</sub>) or (tr+tf) ≤ (t<sub>CYC8</sub>-t<sub>CCLR</sub>-t<sub>CCHR</sub>).

Note 2: All timings are specified taking the levels of 20% and 80% of V<sub>DD</sub> as the reference.

Note 3: The values of t<sub>CCLW</sub> and t<sub>CCLR</sub> are specified during the overlapping period of CS1 at "L" (CS2 = "H") and the "L" levels of  $\overline{WR}$  and  $\overline{RD}$ , respectively.

• System bus read/write characteristics 2 (68-series MPU)

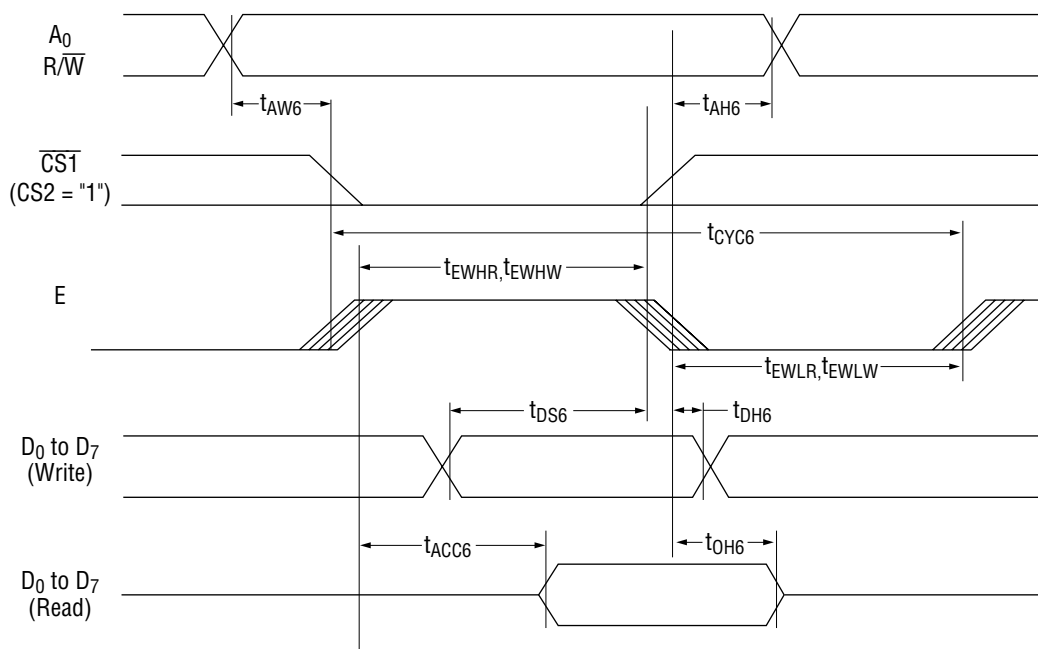

[ $V_{DD} = 4.5\text{ V to }5.5\text{ V}$ ,  $T_a = -40\text{ to }+85^\circ\text{C}$ ]

| Parameter            |       | Applicable pins | Symbol     | Condition  | Rated value |     | Unit |
|----------------------|-------|-----------------|------------|------------|-------------|-----|------|
|                      |       |                 |            |            | Min         | Max |      |
| Address hold time    |       | A0              | $t_{AH6}$  |            | 0           | —   | ns   |
| Address setup time   |       |                 | $t_{AW6}$  |            | 0           | —   |      |
| System cycle time    |       | A0              | $t_{CYC6}$ |            | 166         | —   |      |
| Data setup time      |       | D0 to D7        | $t_{DS6}$  |            | 30          | —   |      |
| Data hold time       |       |                 | $t_{DH6}$  |            | 10          | —   |      |
| Access time          |       |                 | $t_{ACC6}$ | CL = 100pF | —           | 70  |      |
| Output disable time  |       |                 | $t_{OH6}$  |            | 10          | 50  |      |
| Enable H pulse width | Read  | E               | $t_{EWHR}$ |            | 70          | —   |      |
|                      | Write |                 | $t_{EWHW}$ |            | 30          | —   |      |
| Enable L pulse width | Read  | E               | $t_{EWLR}$ |            | 30          | —   |      |
|                      | Write |                 | $t_{EWLW}$ |            | 30          | —   |      |

[V<sub>DD</sub> = 2.7 V to 4.5 V, T<sub>a</sub> = -40 to +85°C]

| Parameter            |       | Applicable pins | Symbol            | Condition  | Rated value |     | Unit |
|----------------------|-------|-----------------|-------------------|------------|-------------|-----|------|
|                      |       |                 |                   |            | Min         | Max |      |
| Address hold time    |       | A0              | t <sub>AH6</sub>  |            | 0           | —   | ns   |
| Address setup time   |       |                 | t <sub>AW6</sub>  |            | 0           | —   |      |
| System cycle time    |       | A0              | t <sub>CYC6</sub> |            | 300         | —   |      |
| Data setup time      |       | D0 to D7        | t <sub>DS6</sub>  |            | 40          | —   |      |
| Data hold time       |       |                 | t <sub>DH6</sub>  |            | 15          | —   |      |
| Access time          |       |                 | t <sub>ACC6</sub> | CL = 100pF | —           | 140 |      |
| Output disable time  |       |                 | t <sub>OH6</sub>  |            | 10          | 100 |      |
| Enable H pulse width | Read  | E               | t <sub>EWHR</sub> |            | 120         | —   |      |
|                      | Write |                 | t <sub>EWHW</sub> |            | 60          | —   |      |
| Enable L pulse width | Read  | E               | t <sub>EWLR</sub> |            | 60          | —   |      |
|                      | Write |                 | t <sub>EWLW</sub> |            | 60          | —   |      |

[V<sub>DD</sub> = 1.8 V to 2.7 V, T<sub>a</sub> = -40 to +85°C]

| Parameter            |       | Applicable pins | Symbol            | Condition  | Rated value |     | Unit |
|----------------------|-------|-----------------|-------------------|------------|-------------|-----|------|
|                      |       |                 |                   |            | Min         | Max |      |
| Address hold time    |       | A0              | t <sub>AH6</sub>  |            | 0           | —   | ns   |
| Address setup time   |       |                 | t <sub>AW6</sub>  |            | 0           | —   |      |
| System cycle time    |       | A0              | t <sub>CYC6</sub> |            | 1000        | —   |      |
| Data setup time      |       | D0 to D7        | t <sub>DS6</sub>  |            | 80          | —   |      |
| Data hold time       |       |                 | t <sub>DH6</sub>  |            | 30          | —   |      |
| Access time          |       |                 | t <sub>ACC6</sub> | CL = 100pF | —           | 280 |      |
| Output disable time  |       |                 | t <sub>OH6</sub>  |            | 10          | 200 |      |
| Enable H pulse width | Read  | E               | t <sub>EWHR</sub> |            | 240         | —   |      |
|                      | Write |                 | t <sub>EWHW</sub> |            | 120         | —   |      |
| Enable L pulse width | Read  | E               | t <sub>EWLR</sub> |            | 120         | —   |      |
|                      | Write |                 | t <sub>EWLW</sub> |            | 120         | —   |      |


Note 1: The input signal rise and fall times are specified as 15ns or less.

When using the system cycle time for fast speed, the specified values are (tr+tf) ≤ (t<sub>CYC6</sub>-t<sub>EWLW</sub>-t<sub>EWHW</sub>) or (tr+tf) ≤ (t<sub>CYC6</sub>-t<sub>EWLR</sub>-t<sub>EWHR</sub>).

Note 2: All timings are specified taking the levels of 20% and 80% of V<sub>DD</sub> as the reference.

Note 3: The values of t<sub>EWLW</sub> and t<sub>EWLR</sub> are specified during the overlapping period of  $\overline{\text{CS1}}$  at "L" (CS2 = "H") and the "H" level of E.

- Serial interface

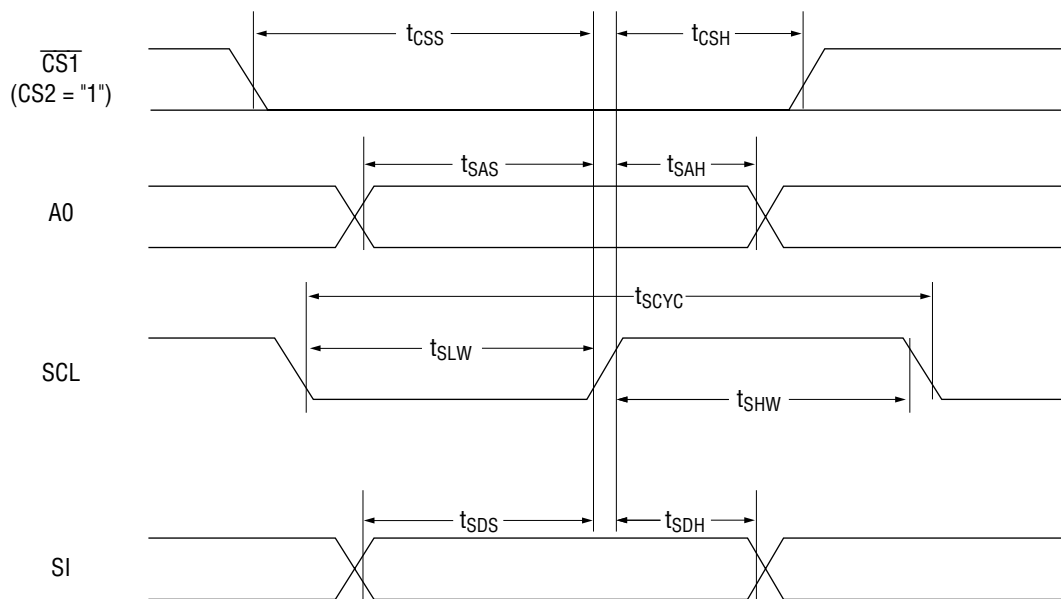

[ $V_{DD} = 4.5\text{ V to }5.5\text{ V}$ ,  $T_a = -40\text{ to }+85^\circ\text{C}$ ]

| Parameter           | Applicable pins | Symbol     | Condition | Rated value |     | Unit |
|---------------------|-----------------|------------|-----------|-------------|-----|------|
|                     |                 |            |           | Min         | Max |      |
| Serial clock period | SCL             | $t_{SCYC}$ |           | 200         | —   | ns   |
| SCL "H" Pulse width |                 | $t_{SHW}$  |           | 75          | —   |      |
| SCL "L" Pulse width |                 | $t_{SLW}$  |           | 75          | —   |      |
| Address setup time  | A0              | $t_{SAS}$  |           | 50          | —   |      |
| Address hold time   |                 | $t_{SAH}$  |           | 100         | —   |      |
| Data setup time     | SI              | $t_{SDS}$  |           | 50          | —   |      |
| Data hold time      |                 | $t_{SDH}$  |           | 50          | —   |      |
| CS-SCL Time         | CS              | $t_{CSS}$  |           | 100         | —   |      |
|                     |                 | $t_{CSH}$  |           | 100         | —   |      |



[V<sub>DD</sub> = 2.7 V to 4.5 V, Ta = -40 to +85°C]

| Parameter           | Applicable pins | Symbol            | Condition | Rated value |     | Unit |
|---------------------|-----------------|-------------------|-----------|-------------|-----|------|
|                     |                 |                   |           | Min         | Max |      |
| Serial clock period | SCL             | t <sub>SCYC</sub> |           | 250         | —   | ns   |
| SCL "H" Pulse width |                 | t <sub>SHW</sub>  |           | 100         | —   |      |
| SCL "L" Pulse width |                 | t <sub>SLW</sub>  |           | 100         | —   |      |
| Address setup time  | A0              | t <sub>SAS</sub>  |           | 150         | —   |      |
| Address hold time   |                 | t <sub>SAH</sub>  |           | 150         | —   |      |
| Data setup time     | SI              | t <sub>SDS</sub>  |           | 100         | —   |      |
| Data hold time      |                 | t <sub>SDH</sub>  |           | 100         | —   |      |
| CS-SCL Time         | CS              | t <sub>CSS</sub>  |           | 150         | —   |      |
|                     |                 | t <sub>CSH</sub>  |           | 150         | —   |      |


[V<sub>DD</sub> = 1.8 V to 2.7 V, Ta = -40 to +85°C]

| Parameter           | Applicable pins | Symbol            | Condition | Rated value |     | Unit |
|---------------------|-----------------|-------------------|-----------|-------------|-----|------|
|                     |                 |                   |           | Min         | Max |      |
| Serial clock period | SCL             | t <sub>SCYC</sub> |           | 400         | —   | ns   |
| SCL "H" Pulse width |                 | t <sub>SHW</sub>  |           | 150         | —   |      |
| SCL "L" Pulse width |                 | t <sub>SLW</sub>  |           | 150         | —   |      |
| Address setup time  | A0              | t <sub>SAS</sub>  |           | 250         | —   |      |
| Address hold time   |                 | t <sub>SAH</sub>  |           | 250         | —   |      |
| Data setup time     | SI              | t <sub>SDS</sub>  |           | 150         | —   |      |
| Data hold time      |                 | t <sub>SDH</sub>  |           | 150         | —   |      |
| CS-SCL Time         | CS              | t <sub>CSS</sub>  |           | 250         | —   |      |
|                     |                 | t <sub>CSH</sub>  |           | 250         | —   |      |

Note 1: The input signal rise and fall times are specified as 15ns or less.

Note 2: All timings are specified taking the levels of 20% and 80% of V<sub>DD</sub> as the reference.

- Display control output timing

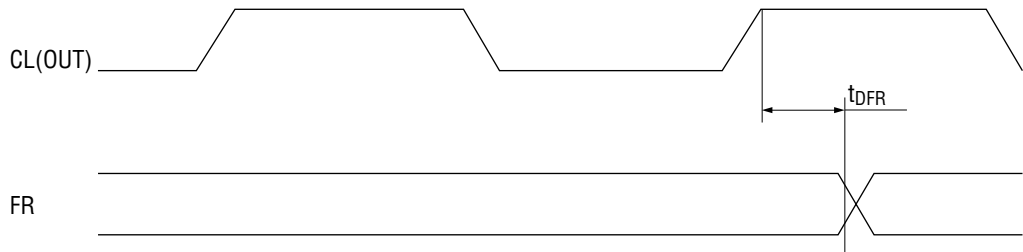[ $V_{DD} = 4.5 \text{ V to } 5.5 \text{ V}$ ,  $T_a = -40 \text{ to } +85^\circ\text{C}$ ]

| Parameter     | Applicable pins | Symbol    | Condition          | Rated value |     |     | Unit |
|---------------|-----------------|-----------|--------------------|-------------|-----|-----|------|
|               |                 |           |                    | Min         | Typ | Max |      |
| FR Delay time | FR              | $t_{DFR}$ | $CL = 50\text{pF}$ | —           | 10  | 40  | ns   |


[ $V_{DD} = 2.7 \text{ V to } 4.5 \text{ V}$ ,  $T_a = -40 \text{ to } +85^\circ\text{C}$ ]

| Parameter     | Applicable pins | Symbol    | Condition          | Rated value |     |     | Unit |
|---------------|-----------------|-----------|--------------------|-------------|-----|-----|------|
|               |                 |           |                    | Min         | Typ | Max |      |
| FR Delay time | FR              | $t_{DFR}$ | $CL = 50\text{pF}$ | —           | 20  | 80  | ns   |

[ $V_{DD} = 1.8 \text{ V to } 2.7 \text{ V}$ ,  $T_a = -40 \text{ to } +85^\circ\text{C}$ ]

| Parameter     | Applicable pins | Symbol    | Condition          | Rated value |     |     | Unit |
|---------------|-----------------|-----------|--------------------|-------------|-----|-----|------|
|               |                 |           |                    | Min         | Typ | Max |      |
| FR Delay time | FR              | $t_{DFR}$ | $CL = 50\text{pF}$ | —           | 50  | 200 | ns   |

- Reset input timing

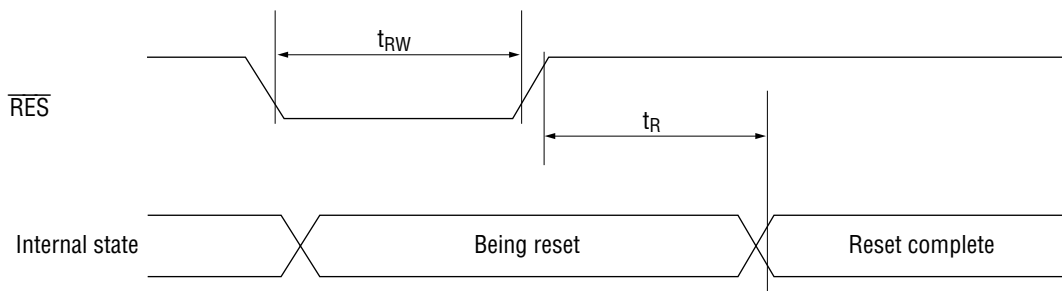[ $V_{\text{DD}} = 4.5 \text{ V to } 5.5 \text{ V}$ ,  $T_{\text{a}} = -40 \text{ to } +85^{\circ}\text{C}$ ]

| Parameter             | Applicable pins         | Symbol          | Condition | Rated value |     |     | Unit          |
|-----------------------|-------------------------|-----------------|-----------|-------------|-----|-----|---------------|
|                       |                         |                 |           | Min         | Typ | Max |               |
| Reset time            | —                       | $t_{\text{R}}$  |           | —           | —   | 0.5 | $\mu\text{s}$ |
| Reset "L" pulse width | $\overline{\text{RES}}$ | $t_{\text{RW}}$ |           | 0.5         | —   | —   |               |

[ $V_{\text{DD}} = 2.7 \text{ V to } 4.5 \text{ V}$ ,  $T_{\text{a}} = -40 \text{ to } +85^{\circ}\text{C}$ ]

| Parameter             | Applicable pins         | Symbol          | Condition | Rated value |     |     | Unit          |
|-----------------------|-------------------------|-----------------|-----------|-------------|-----|-----|---------------|
|                       |                         |                 |           | Min         | Typ | Max |               |
| Reset time            | —                       | $t_{\text{R}}$  |           | —           | —   | 1   | $\mu\text{s}$ |
| Reset "L" pulse width | $\overline{\text{RES}}$ | $t_{\text{RW}}$ |           | 1           | —   | —   |               |

[ $V_{\text{DD}} = 1.8 \text{ V to } 2.7 \text{ V}$ ,  $T_{\text{a}} = -40 \text{ to } +85^{\circ}\text{C}$ ]

| Parameter             | Applicable pins         | Symbol          | Condition | Rated value |     |     | Unit          |
|-----------------------|-------------------------|-----------------|-----------|-------------|-----|-----|---------------|
|                       |                         |                 |           | Min         | Typ | Max |               |
| Reset time            | —                       | $t_{\text{R}}$  |           | —           | —   | 1.5 | $\mu\text{s}$ |
| Reset "L" pulse width | $\overline{\text{RES}}$ | $t_{\text{RW}}$ |           | 1.5         | —   | —   |               |


Note 1: All timings are specified taking the levels of 20% and 80% of  $V_{\text{DD}}$  as the reference.

## MPU INTERFACE


The ML9050/9051 series ICs can be connected directly to the 80-series and 68-series MPUs. Further, by using the serial interface, it is possible to operate the LSI with a minimum number of signal lines.

In addition, it is possible to expand the display area by using the ML9050/9051 series LSIs in a multiple chip configuration. In this case, it is possible to select the individual LSI to be accessed using the chip select signals.


### • 80-Series MPU

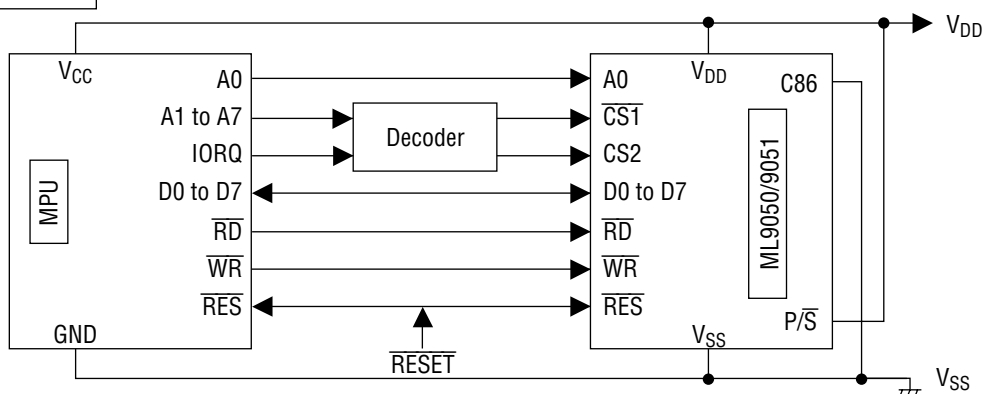

### • 68-Series MPU

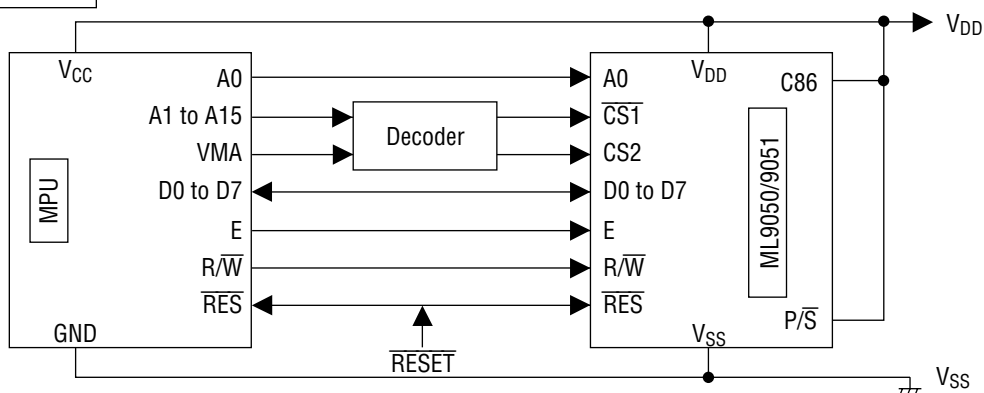


### • Serial interface

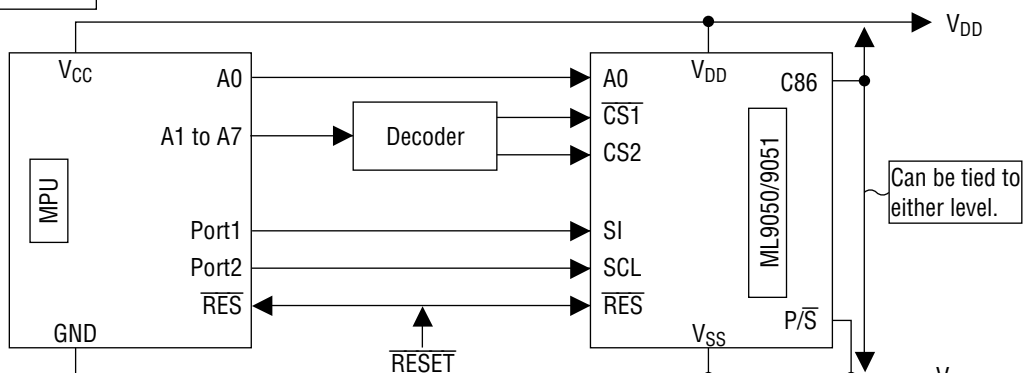

## PAD CONFIGURATION

### Pad Layout ; ML9050

Chip Size : 11.05 × 3.39mm

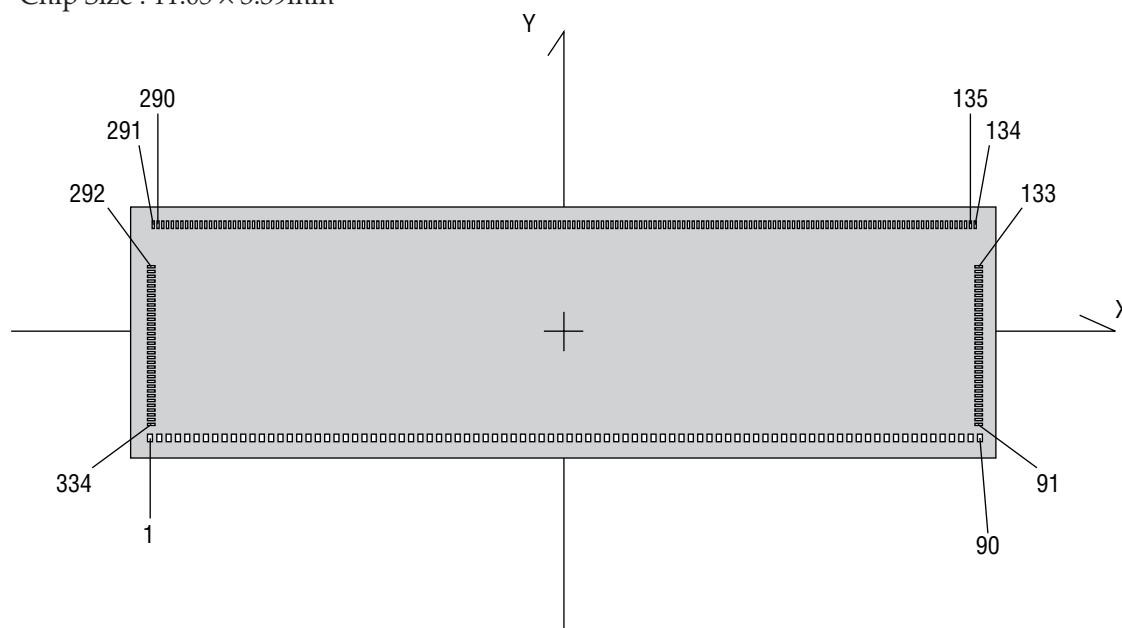

### Pad Coordinates

| Pad No. | Pad Name                | X (μm) | Y (μm) | Pad No. | Pad Name         | X (μm) | Y (μm) |
|---------|-------------------------|--------|--------|---------|------------------|--------|--------|
| 1       | DUMMY                   | -5000  | -1550  | 21      | DB1              | -2760  | -1550  |
| 2       | DUMMY                   | -4888  | -1550  | 22      | DB2              | -2648  | -1550  |
| 3       | DUMMY                   | -4776  | -1550  | 23      | DB3              | -2536  | -1550  |
| 4       | DUMMY                   | -4664  | -1550  | 24      | DB4              | -2424  | -1550  |
| 5       | FRS                     | -4552  | -1550  | 25      | DB5              | -2312  | -1550  |
| 6       | FR                      | -4440  | -1550  | 26      | DB6              | -2200  | -1550  |
| 7       | CL                      | -4328  | -1550  | 27      | DB7              | -2088  | -1550  |
| 8       | $\overline{\text{DOF}}$ | -4216  | -1550  | 28      | V <sub>DD</sub>  | -1976  | -1550  |
| 9       | TEST0                   | -4104  | -1550  | 29      | V <sub>DD</sub>  | -1896  | -1550  |
| 10      | GND                     | -3992  | -1550  | 30      | V <sub>DD</sub>  | -1816  | -1550  |
| 11      | $\overline{\text{CS1}}$ | -3880  | -1550  | 31      | V <sub>DD</sub>  | -1736  | -1550  |
| 12      | CS2                     | -3768  | -1550  | 32      | V <sub>IN</sub>  | -1656  | -1550  |
| 13      | V <sub>DD</sub>         | -3656  | -1550  | 33      | V <sub>IN</sub>  | -1576  | -1550  |
| 14      | $\overline{\text{RES}}$ | -3544  | -1550  | 34      | V <sub>IN</sub>  | -1496  | -1550  |
| 15      | A0                      | -3432  | -1550  | 35      | V <sub>IN</sub>  | -1416  | -1550  |
| 16      | GND                     | -3320  | -1550  | 36      | GND              | -1336  | -1550  |
| 17      | $\overline{\text{WR}}$  | -3208  | -1550  | 37      | GND              | -1256  | -1550  |
| 18      | $\overline{\text{RD}}$  | -3096  | -1550  | 38      | GND              | -1176  | -1550  |
| 19      | V <sub>DD</sub>         | -2984  | -1550  | 39      | V <sub>OUT</sub> | -1076  | -1550  |
| 20      | DB0                     | -2872  | -1550  | 40      | V <sub>OUT</sub> | -951   | -1550  |

| Pad No. | Pad Name        | X (μm) | Y (μm) |
|---------|-----------------|--------|--------|
| 41      | VC2+            | -826   | -1550  |
| 42      | VC2+            | -701   | -1550  |
| 43      | VC4+            | -576   | -1550  |
| 44      | VC4+            | -451   | -1550  |
| 45      | VC6+            | -326   | -1550  |
| 46      | VC6+            | -201   | -1550  |
| 47      | VS2-            | -76    | -1550  |
| 48      | VS2-            | 49     | -1550  |
| 49      | VS1-            | 174    | -1550  |
| 50      | VS1-            | 299    | -1550  |
| 51      | VC5+            | 424    | -1550  |
| 52      | VC5+            | 549    | -1550  |
| 53      | VC3+            | 674    | -1550  |
| 54      | VC3+            | 799    | -1550  |
| 55      | VC1+            | 924    | -1550  |
| 56      | VC1+            | 1049   | -1550  |
| 57      | GND             | 1174   | -1550  |
| 58      | GND             | 1299   | -1550  |
| 59      | VRS             | 1424   | -1550  |
| 60      | VRS             | 1549   | -1550  |
| 61      | V <sub>DD</sub> | 1674   | -1550  |
| 62      | V <sub>DD</sub> | 1799   | -1550  |
| 63      | V1              | 1924   | -1550  |
| 64      | V1              | 2049   | -1550  |
| 65      | V2              | 2174   | -1550  |
| 66      | V2              | 2299   | -1550  |
| 67      | V3              | 2424   | -1550  |
| 68      | V3              | 2549   | -1550  |
| 69      | V4              | 2674   | -1550  |
| 70      | V4              | 2799   | -1550  |
| 71      | V5              | 2924   | -1550  |
| 72      | V5              | 3049   | -1550  |
| 73      | VR              | 3174   | -1550  |
| 74      | VR              | 3299   | -1550  |
| 75      | V <sub>DD</sub> | 3424   | -1550  |
| 76      | V <sub>DD</sub> | 3549   | -1550  |
| 77      | TEST1           | 3674   | -1550  |
| 78      | V <sub>DD</sub> | 3786   | -1550  |
| 79      | MS              | 3898   | -1550  |
| 80      | CLS             | 4010   | -1550  |

| Pad No. | Pad Name        | X (μm) | Y (μm)  |
|---------|-----------------|--------|---------|
| 81      | GND             | 4122   | -1550   |
| 82      | C86             | 4234   | -1550   |
| 83      | PS              | 4346   | -1550   |
| 84      | V <sub>DD</sub> | 4458   | -1550   |
| 85      | HPM             | 4570   | -1550   |
| 86      | GND             | 4682   | -1550   |
| 87      | IRS             | 4794   | -1550   |
| 88      | V <sub>DD</sub> | 4906   | -1550   |
| 89      | DUMMY           | 5018   | -1550   |
| 90      | DUMMY           | 5130   | -1550   |
| 91      | DUMMY           | 5340   | -1363.2 |
| 92      | DUMMY           | 5340   | -1298.2 |
| 93      | DUMMY           | 5340   | -1233.2 |
| 94      | DUMMY           | 5340   | -1168.2 |
| 95      | DUMMY           | 5340   | -1103.2 |
| 96      | DUMMY           | 5340   | -1038.2 |
| 97      | DUMMY           | 5340   | -973.2  |
| 98      | COM31           | 5340   | -908.2  |
| 99      | COM30           | 5340   | -843.2  |
| 100     | COM29           | 5340   | -778.2  |
| 101     | COM28           | 5340   | -713.2  |
| 102     | COM27           | 5340   | -648.2  |
| 103     | COM26           | 5340   | -583.2  |
| 104     | COM25           | 5340   | -518.2  |
| 105     | COM24           | 5340   | -453.2  |
| 106     | COM23           | 5340   | -388.2  |
| 107     | COM22           | 5340   | -323.2  |
| 108     | COM21           | 5340   | -258.2  |
| 109     | COM20           | 5340   | -193.2  |
| 110     | COM19           | 5340   | -128.2  |
| 111     | COM18           | 5340   | -63.2   |
| 112     | COM17           | 5340   | 1.8     |
| 113     | COM16           | 5340   | 66.8    |
| 114     | COM15           | 5340   | 131.8   |
| 115     | COM14           | 5340   | 196.8   |
| 116     | COM13           | 5340   | 261.8   |
| 117     | COM12           | 5340   | 326.8   |
| 118     | COM11           | 5340   | 391.8   |
| 119     | COM10           | 5340   | 456.8   |
| 120     | COM9            | 5340   | 521.8   |

| Pad No. | Pad Name | X (μm) | Y (μm) |
|---------|----------|--------|--------|
| 121     | COM8     | 5340   | 586.8  |
| 122     | COM7     | 5340   | 651.8  |
| 123     | COM6     | 5340   | 716.8  |
| 124     | COM5     | 5340   | 781.8  |
| 125     | COM4     | 5340   | 846.8  |
| 126     | COM3     | 5340   | 911.8  |
| 127     | COM2     | 5340   | 976.8  |
| 128     | COM1     | 5340   | 1041.8 |
| 129     | COM0     | 5340   | 1106.8 |
| 130     | COMS1    | 5340   | 1171.8 |
| 131     | DUMMY    | 5340   | 1236.8 |
| 132     | DUMMY    | 5340   | 1301.8 |
| 133     | DUMMY    | 5340   | 1366.8 |
| 134     | DUMMY    | 5037.5 | 1545   |
| 135     | DUMMY    | 4972.5 | 1545   |
| 136     | DUMMY    | 4907.5 | 1545   |
| 137     | DUMMY    | 4842.5 | 1545   |
| 138     | DUMMY    | 4777.5 | 1545   |
| 139     | DUMMY    | 4712.5 | 1545   |
| 140     | DUMMY    | 4647.5 | 1545   |
| 141     | DUMMY    | 4582.5 | 1545   |
| 142     | DUMMY    | 4517.5 | 1545   |
| 143     | DUMMY    | 4452.5 | 1545   |
| 144     | DUMMY    | 4387.5 | 1545   |
| 145     | DUMMY    | 4322.5 | 1545   |
| 146     | SEG0     | 4257.5 | 1545   |
| 147     | SEG1     | 4192.5 | 1545   |
| 148     | SEG2     | 4127.5 | 1545   |
| 149     | SEG3     | 4062.5 | 1545   |
| 150     | SEG4     | 3997.5 | 1545   |
| 151     | SEG5     | 3932.5 | 1545   |
| 152     | SEG6     | 3867.5 | 1545   |
| 153     | SEG7     | 3802.5 | 1545   |
| 154     | SEG8     | 3737.5 | 1545   |
| 155     | SEG9     | 3672.5 | 1545   |
| 156     | SEG10    | 3607.5 | 1545   |
| 157     | SEG11    | 3542.5 | 1545   |
| 158     | SEG12    | 3477.5 | 1545   |
| 159     | SEG13    | 3412.5 | 1545   |
| 160     | SEG14    | 3347.5 | 1545   |

| Pad No. | Pad Name | X (μm) | Y (μm) |
|---------|----------|--------|--------|
| 161     | SEG15    | 3282.5 | 1545   |
| 162     | SEG16    | 3217.5 | 1545   |
| 163     | SEG17    | 3152.5 | 1545   |
| 164     | SEG18    | 3087.5 | 1545   |
| 165     | SEG19    | 3022.5 | 1545   |
| 166     | SEG20    | 2957.5 | 1545   |
| 167     | SEG21    | 2892.5 | 1545   |
| 168     | SEG22    | 2827.5 | 1545   |
| 169     | SEG23    | 2762.5 | 1545   |
| 170     | SEG24    | 2697.5 | 1545   |
| 171     | SEG25    | 2632.5 | 1545   |
| 172     | SEG26    | 2567.5 | 1545   |
| 173     | SEG27    | 2502.5 | 1545   |
| 174     | SEG28    | 2437.5 | 1545   |
| 175     | SEG29    | 2372.5 | 1545   |
| 176     | SEG30    | 2307.5 | 1545   |
| 177     | SEG31    | 2242.5 | 1545   |
| 178     | SEG32    | 2177.5 | 1545   |
| 179     | SEG33    | 2112.5 | 1545   |
| 180     | SEG34    | 2047.5 | 1545   |
| 181     | SEG35    | 1982.5 | 1545   |
| 182     | SEG36    | 1917.5 | 1545   |
| 183     | SEG37    | 1852.5 | 1545   |
| 184     | SEG38    | 1787.5 | 1545   |
| 185     | SEG39    | 1722.5 | 1545   |
| 186     | SEG40    | 1657.5 | 1545   |
| 187     | SEG41    | 1592.5 | 1545   |
| 188     | SEG42    | 1527.5 | 1545   |
| 189     | SEG43    | 1462.5 | 1545   |
| 190     | SEG44    | 1397.5 | 1545   |
| 191     | SEG45    | 1332.5 | 1545   |
| 192     | SEG46    | 1267.5 | 1545   |
| 193     | SEG47    | 1202.5 | 1545   |
| 194     | SEG48    | 1137.5 | 1545   |
| 195     | SEG49    | 1072.5 | 1545   |
| 196     | SEG50    | 1007.5 | 1545   |
| 197     | SEG51    | 942.5  | 1545   |
| 198     | SEG52    | 877.5  | 1545   |
| 199     | SEG53    | 812.5  | 1545   |
| 200     | SEG54    | 747.5  | 1545   |

| Pad No. | Pad Name | X (μm)  | Y (μm) |
|---------|----------|---------|--------|
| 201     | SEG55    | 682.5   | 1545   |
| 202     | SEG56    | 617.5   | 1545   |
| 203     | SEG57    | 552.5   | 1545   |
| 204     | SEG58    | 487.5   | 1545   |
| 205     | SEG59    | 422.5   | 1545   |
| 206     | SEG60    | 357.5   | 1545   |
| 207     | SEG61    | 292.5   | 1545   |
| 208     | SEG62    | 227.5   | 1545   |
| 209     | SEG63    | 162.5   | 1545   |
| 210     | SEG64    | 97.5    | 1545   |
| 211     | SEG65    | 32.5    | 1545   |
| 212     | SEG66    | -32.5   | 1545   |
| 213     | SEG67    | -97.5   | 1545   |
| 214     | SEG68    | -162.5  | 1545   |
| 215     | SEG69    | -227.5  | 1545   |
| 216     | SEG70    | -292.5  | 1545   |
| 217     | SEG71    | -357.5  | 1545   |
| 218     | SEG72    | -422.5  | 1545   |
| 219     | SEG73    | -487.5  | 1545   |
| 220     | SEG74    | -552.5  | 1545   |
| 221     | SEG75    | -617.5  | 1545   |
| 222     | SEG76    | -682.5  | 1545   |
| 223     | SEG77    | -747.5  | 1545   |
| 224     | SEG78    | -812.5  | 1545   |
| 225     | SEG79    | -877.5  | 1545   |
| 226     | SEG80    | -942.5  | 1545   |
| 227     | SEG81    | -1007.5 | 1545   |
| 228     | SEG82    | -1072.5 | 1545   |
| 229     | SEG83    | -1137.5 | 1545   |
| 230     | SEG84    | -1202.5 | 1545   |
| 231     | SEG85    | -1267.5 | 1545   |
| 232     | SEG86    | -1332.5 | 1545   |
| 233     | SEG87    | -1397.5 | 1545   |
| 234     | SEG88    | -1462.5 | 1545   |
| 235     | SEG89    | -1527.5 | 1545   |
| 236     | SEG90    | -1592.5 | 1545   |
| 237     | SEG91    | -1657.5 | 1545   |
| 238     | SEG92    | -1722.5 | 1545   |
| 239     | SEG93    | -1787.5 | 1545   |
| 240     | SEG94    | -1852.5 | 1545   |

| Pad No. | Pad Name | X (μm)  | Y (μm) |
|---------|----------|---------|--------|
| 241     | SEG95    | -1917.5 | 1545   |
| 242     | SEG96    | -1982.5 | 1545   |
| 243     | SEG97    | -2047.5 | 1545   |
| 244     | SEG98    | -2112.5 | 1545   |
| 245     | SEG99    | -2177.5 | 1545   |
| 246     | SEG100   | -2242.5 | 1545   |
| 247     | SEG101   | -2307.5 | 1545   |
| 248     | SEG102   | -2372.5 | 1545   |
| 249     | SEG103   | -2437.5 | 1545   |
| 250     | SEG104   | -2502.5 | 1545   |
| 251     | SEG105   | -2567.5 | 1545   |
| 252     | SEG106   | -2632.5 | 1545   |
| 253     | SEG107   | -2697.5 | 1545   |
| 254     | SEG108   | -2762.5 | 1545   |
| 255     | SEG109   | -2827.5 | 1545   |
| 256     | SEG110   | -2892.5 | 1545   |
| 257     | SEG111   | -2957.5 | 1545   |
| 258     | SEG112   | -3022.5 | 1545   |
| 259     | SEG113   | -3087.5 | 1545   |
| 260     | SEG114   | -3152.5 | 1545   |
| 261     | SEG115   | -3217.5 | 1545   |
| 262     | SEG116   | -3282.5 | 1545   |
| 263     | SEG117   | -3347.5 | 1545   |
| 264     | SEG118   | -3412.5 | 1545   |
| 265     | SEG119   | -3477.5 | 1545   |
| 266     | SEG120   | -3542.5 | 1545   |
| 267     | SEG121   | -3607.5 | 1545   |
| 268     | SEG122   | -3672.5 | 1545   |
| 269     | SEG123   | -3737.5 | 1545   |
| 270     | SEG124   | -3802.5 | 1545   |
| 271     | SEG125   | -3867.5 | 1545   |
| 272     | SEG126   | -3932.5 | 1545   |
| 273     | SEG127   | -3997.5 | 1545   |
| 274     | SEG128   | -4062.5 | 1545   |
| 275     | SEG129   | -4127.5 | 1545   |
| 276     | SEG130   | -4192.5 | 1545   |
| 277     | SEG131   | -4257.5 | 1545   |
| 278     | DUMMY    | -4322.5 | 1545   |
| 279     | DUMMY    | -4387.5 | 1545   |
| 280     | DUMMY    | -4452.5 | 1545   |




| Pad No. | Pad Name | X (μm)  | Y (μm) |
|---------|----------|---------|--------|
| 281     | DUMMY    | -4517.5 | 1545   |
| 282     | DUMMY    | -4582.5 | 1545   |
| 283     | DUMMY    | -4647.5 | 1545   |
| 284     | DUMMY    | -4712.5 | 1545   |
| 285     | DUMMY    | -4777.5 | 1545   |
| 286     | DUMMY    | -4842.5 | 1545   |
| 287     | DUMMY    | -4907.5 | 1545   |
| 288     | DUMMY    | -4972.5 | 1545   |
| 289     | DUMMY    | -5037.5 | 1545   |
| 290     | DUMMY    | -5102.5 | 1545   |
| 291     | DUMMY    | -5167.5 | 1545   |
| 292     | DUMMY    | -5340   | 1366.8 |
| 293     | DUMMY    | -5340   | 1301.8 |
| 294     | DUMMY    | -5340   | 1236.8 |
| 295     | COM32    | -5340   | 1171.8 |
| 296     | COM33    | -5340   | 1106.8 |
| 297     | COM34    | -5340   | 1041.8 |
| 298     | COM35    | -5340   | 976.8  |
| 299     | COM36    | -5340   | 911.8  |
| 300     | COM37    | -5340   | 846.8  |
| 301     | COM38    | -5340   | 781.8  |
| 302     | COM39    | -5340   | 716.8  |
| 303     | COM40    | -5340   | 651.8  |
| 304     | COM41    | -5340   | 586.8  |
| 305     | COM42    | -5340   | 521.8  |
| 306     | COM43    | -5340   | 456.8  |
| 307     | COM44    | -5340   | 391.8  |

| Pad No. | Pad Name | X (μm) | Y (μm)  |
|---------|----------|--------|---------|
| 308     | COM45    | -5340  | 326.8   |
| 309     | COM46    | -5340  | 261.8   |
| 310     | COM47    | -5340  | 196.8   |
| 311     | COM48    | -5340  | 131.8   |
| 312     | COM49    | -5340  | 66.8    |
| 313     | COM50    | -5340  | 1.8     |
| 314     | COM51    | -5340  | -63.2   |
| 315     | COM52    | -5340  | -128.2  |
| 316     | COM53    | -5340  | -193.2  |
| 317     | COM54    | -5340  | -258.2  |
| 318     | COM55    | -5340  | -323.2  |
| 319     | COM56    | -5340  | -388.2  |
| 320     | COM57    | -5340  | -453.2  |
| 321     | COM58    | -5340  | -518.2  |
| 322     | COM59    | -5340  | -583.2  |
| 323     | COM60    | -5340  | -648.2  |
| 324     | COM61    | -5340  | -713.2  |
| 325     | COM62    | -5340  | -778.2  |
| 326     | COM63    | -5340  | -843.2  |
| 327     | COMS0    | -5340  | -908.2  |
| 328     | DUMMY    | -5340  | -973.2  |
| 329     | DUMMY    | -5340  | -1038.2 |
| 330     | DUMMY    | -5340  | -1103.2 |
| 331     | DUMMY    | -5340  | -1168.2 |
| 332     | DUMMY    | -5340  | -1233.2 |
| 333     | DUMMY    | -5340  | -1298.2 |
| 334     | DUMMY    | -5340  | -1363.2 |

## PAD CONFIGURATION

### Pad Layout ; ML9051

Chip Size : 11.05 × 3.39mm

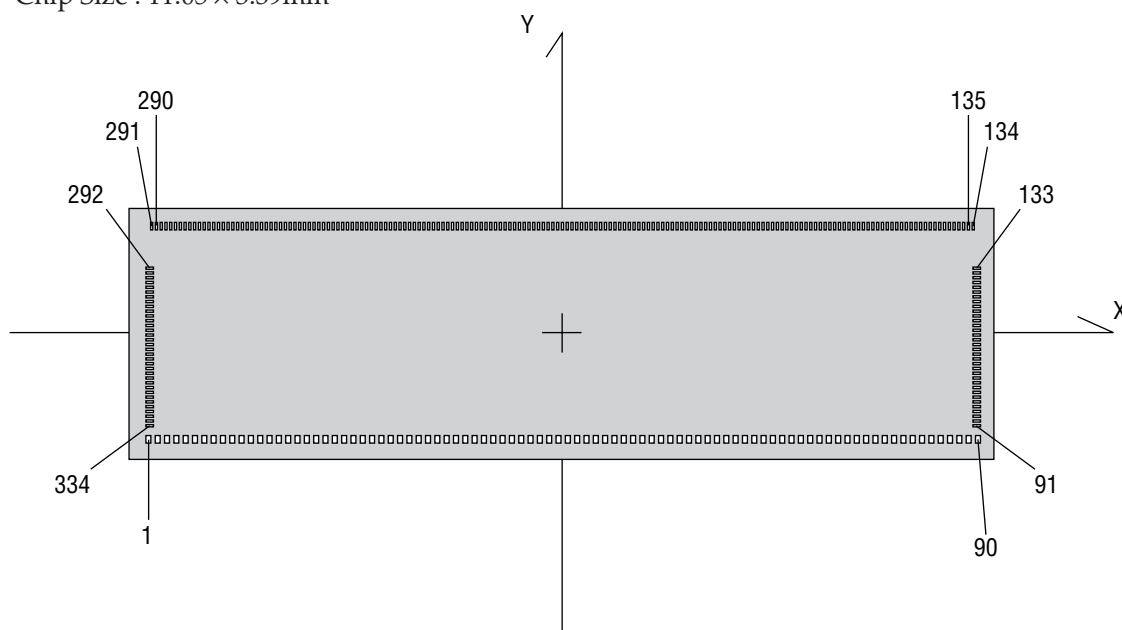

### Pad Coordinates

| Pad No. | Pad Name                | X (μm) | Y (μm) |
|---------|-------------------------|--------|--------|
| 1       | DUMMY                   | -5000  | -1550  |
| 2       | DUMMY                   | -4888  | -1550  |
| 3       | DUMMY                   | -4776  | -1550  |
| 4       | DUMMY                   | -4664  | -1550  |
| 5       | FRS                     | -4552  | -1550  |
| 6       | FR                      | -4440  | -1550  |
| 7       | CL                      | -4328  | -1550  |
| 8       | $\overline{\text{DOF}}$ | -4216  | -1550  |
| 9       | TEST0                   | -4104  | -1550  |
| 10      | GND                     | -3992  | -1550  |
| 11      | $\overline{\text{CS1}}$ | -3880  | -1550  |
| 12      | CS2                     | -3768  | -1550  |
| 13      | V <sub>DD</sub>         | -3656  | -1550  |
| 14      | $\overline{\text{RES}}$ | -3544  | -1550  |
| 15      | A0                      | -3432  | -1550  |
| 16      | GND                     | -3320  | -1550  |
| 17      | $\overline{\text{WR}}$  | -3208  | -1550  |
| 18      | $\overline{\text{RD}}$  | -3096  | -1550  |
| 19      | V <sub>DD</sub>         | -2984  | -1550  |
| 20      | DB0                     | -2872  | -1550  |

| Pad No. | Pad Name         | X (μm) | Y (μm) |
|---------|------------------|--------|--------|
| 21      | DB1              | -2760  | -1550  |
| 22      | DB2              | -2648  | -1550  |
| 23      | DB3              | -2536  | -1550  |
| 24      | DB4              | -2424  | -1550  |
| 25      | DB5              | -2312  | -1550  |
| 26      | DB6              | -2200  | -1550  |
| 27      | DB7              | -2088  | -1550  |
| 28      | V <sub>DD</sub>  | -1976  | -1550  |
| 29      | V <sub>DD</sub>  | -1896  | -1550  |
| 30      | V <sub>DD</sub>  | -1816  | -1550  |
| 31      | V <sub>DD</sub>  | -1736  | -1550  |
| 32      | V <sub>IN</sub>  | -1656  | -1550  |
| 33      | V <sub>IN</sub>  | -1576  | -1550  |
| 34      | V <sub>IN</sub>  | -1496  | -1550  |
| 35      | V <sub>IN</sub>  | -1416  | -1550  |
| 36      | GND              | -1336  | -1550  |
| 37      | GND              | -1256  | -1550  |
| 38      | GND              | -1176  | -1550  |
| 39      | V <sub>OUT</sub> | -1076  | -1550  |
| 40      | V <sub>OUT</sub> | -951   | -1550  |

| Pad No. | Pad Name        | X (μm) | Y (μm) |
|---------|-----------------|--------|--------|
| 41      | VC2+            | -826   | -1550  |
| 42      | VC2+            | -701   | -1550  |
| 43      | VC4+            | -576   | -1550  |
| 44      | VC4+            | -451   | -1550  |
| 45      | VC6+            | -326   | -1550  |
| 46      | VC6+            | -201   | -1550  |
| 47      | VS2-            | -76    | -1550  |
| 48      | VS2-            | 49     | -1550  |
| 49      | VS1-            | 174    | -1550  |
| 50      | VS1-            | 299    | -1550  |
| 51      | VC5+            | 424    | -1550  |
| 52      | VC5+            | 549    | -1550  |
| 53      | VC3+            | 674    | -1550  |
| 54      | VC3+            | 799    | -1550  |
| 55      | VC1+            | 924    | -1550  |
| 56      | VC1+            | 1049   | -1550  |
| 57      | GND             | 1174   | -1550  |
| 58      | GND             | 1299   | -1550  |
| 59      | VRS             | 1424   | -1550  |
| 60      | VRS             | 1549   | -1550  |
| 61      | V <sub>DD</sub> | 1674   | -1550  |
| 62      | V <sub>DD</sub> | 1799   | -1550  |
| 63      | V1              | 1924   | -1550  |
| 64      | V1              | 2049   | -1550  |
| 65      | V2              | 2174   | -1550  |
| 66      | V2              | 2299   | -1550  |
| 67      | V3              | 2424   | -1550  |
| 68      | V3              | 2549   | -1550  |
| 69      | V4              | 2674   | -1550  |
| 70      | V4              | 2799   | -1550  |
| 71      | V5              | 2924   | -1550  |
| 72      | V5              | 3049   | -1550  |
| 73      | VR              | 3174   | -1550  |
| 74      | VR              | 3299   | -1550  |
| 75      | V <sub>DD</sub> | 3424   | -1550  |
| 76      | V <sub>DD</sub> | 3549   | -1550  |
| 77      | TEST1           | 3674   | -1550  |
| 78      | V <sub>DD</sub> | 3786   | -1550  |
| 79      | MS              | 3898   | -1550  |
| 80      | CLS             | 4010   | -1550  |

| Pad No. | Pad Name        | X (μm) | Y (μm)  |
|---------|-----------------|--------|---------|
| 81      | GND             | 4122   | -1550   |
| 82      | C86             | 4234   | -1550   |
| 83      | PS              | 4346   | -1550   |
| 84      | V <sub>DD</sub> | 4458   | -1550   |
| 85      | HPM             | 4570   | -1550   |
| 86      | GND             | 4682   | -1550   |
| 87      | IRS             | 4794   | -1550   |
| 88      | V <sub>DD</sub> | 4906   | -1550   |
| 89      | DUMMY           | 5018   | -1550   |
| 90      | DUMMY           | 5130   | -1550   |
| 91      | DUMMY           | 5340   | -1363.2 |
| 92      | DUMMY           | 5340   | -1298.2 |
| 93      | DUMMY           | 5340   | -1233.2 |
| 94      | DUMMY           | 5340   | -1168.2 |
| 95      | DUMMY           | 5340   | -1103.2 |
| 96      | DUMMY           | 5340   | -1038.2 |
| 97      | DUMMY           | 5340   | -973.2  |
| 98      | DUMMY           | 5340   | -908.2  |
| 99      | DUMMY           | 5340   | -843.2  |
| 100     | DUMMY           | 5340   | -778.2  |
| 101     | DUMMY           | 5340   | -713.2  |
| 102     | DUMMY           | 5340   | -648.2  |
| 103     | DUMMY           | 5340   | -583.2  |
| 104     | DUMMY           | 5340   | -518.2  |
| 105     | DUMMY           | 5340   | -453.2  |
| 106     | COM23           | 5340   | -388.2  |
| 107     | COM22           | 5340   | -323.2  |
| 108     | COM21           | 5340   | -258.2  |
| 109     | COM20           | 5340   | -193.2  |
| 110     | COM19           | 5340   | -128.2  |
| 111     | COM18           | 5340   | -63.2   |
| 112     | COM17           | 5340   | 1.8     |
| 113     | COM16           | 5340   | 66.8    |
| 114     | COM15           | 5340   | 131.8   |
| 115     | COM14           | 5340   | 196.8   |
| 116     | COM13           | 5340   | 261.8   |
| 117     | COM12           | 5340   | 326.8   |
| 118     | COM11           | 5340   | 391.8   |
| 119     | COM10           | 5340   | 456.8   |
| 120     | COM9            | 5340   | 521.8   |

| Pad No. | Pad Name | X (μm) | Y (μm) |
|---------|----------|--------|--------|
| 121     | COM8     | 5340   | 586.8  |
| 122     | COM7     | 5340   | 651.8  |
| 123     | COM6     | 5340   | 716.8  |
| 124     | COM5     | 5340   | 781.8  |
| 125     | COM4     | 5340   | 846.8  |
| 126     | COM3     | 5340   | 911.8  |
| 127     | COM2     | 5340   | 976.8  |
| 128     | COM1     | 5340   | 1041.8 |
| 129     | COM0     | 5340   | 1106.8 |
| 130     | COMS1    | 5340   | 1171.8 |
| 131     | DUMMY    | 5340   | 1236.8 |
| 132     | DUMMY    | 5340   | 1301.8 |
| 133     | DUMMY    | 5340   | 1366.8 |
| 134     | DUMMY    | 5037.5 | 1545   |
| 135     | DUMMY    | 4972.5 | 1545   |
| 136     | DUMMY    | 4907.5 | 1545   |
| 137     | DUMMY    | 4842.5 | 1545   |
| 138     | DUMMY    | 4777.5 | 1545   |
| 139     | DUMMY    | 4712.5 | 1545   |
| 140     | DUMMY    | 4647.5 | 1545   |
| 141     | DUMMY    | 4582.5 | 1545   |
| 142     | DUMMY    | 4517.5 | 1545   |
| 143     | DUMMY    | 4452.5 | 1545   |
| 144     | DUMMY    | 4387.5 | 1545   |
| 145     | DUMMY    | 4322.5 | 1545   |
| 146     | SEG0     | 4257.5 | 1545   |
| 147     | SEG1     | 4192.5 | 1545   |
| 148     | SEG2     | 4127.5 | 1545   |
| 149     | SEG3     | 4062.5 | 1545   |
| 150     | SEG4     | 3997.5 | 1545   |
| 151     | SEG5     | 3932.5 | 1545   |
| 152     | SEG6     | 3867.5 | 1545   |
| 153     | SEG7     | 3802.5 | 1545   |
| 154     | SEG8     | 3737.5 | 1545   |
| 155     | SEG9     | 3672.5 | 1545   |
| 156     | SEG10    | 3607.5 | 1545   |
| 157     | SEG11    | 3542.5 | 1545   |
| 158     | SEG12    | 3477.5 | 1545   |
| 159     | SEG13    | 3412.5 | 1545   |
| 160     | SEG14    | 3347.5 | 1545   |

| Pad No. | Pad Name | X (μm) | Y (μm) |
|---------|----------|--------|--------|
| 161     | SEG15    | 3282.5 | 1545   |
| 162     | SEG16    | 3217.5 | 1545   |
| 163     | SEG17    | 3152.5 | 1545   |
| 164     | SEG18    | 3087.5 | 1545   |
| 165     | SEG19    | 3022.5 | 1545   |
| 166     | SEG20    | 2957.5 | 1545   |
| 167     | SEG21    | 2892.5 | 1545   |
| 168     | SEG22    | 2827.5 | 1545   |
| 169     | SEG23    | 2762.5 | 1545   |
| 170     | SEG24    | 2697.5 | 1545   |
| 171     | SEG25    | 2632.5 | 1545   |
| 172     | SEG26    | 2567.5 | 1545   |
| 173     | SEG27    | 2502.5 | 1545   |
| 174     | SEG28    | 2437.5 | 1545   |
| 175     | SEG29    | 2372.5 | 1545   |
| 176     | SEG30    | 2307.5 | 1545   |
| 177     | SEG31    | 2242.5 | 1545   |
| 178     | SEG32    | 2177.5 | 1545   |
| 179     | SEG33    | 2112.5 | 1545   |
| 180     | SEG34    | 2047.5 | 1545   |
| 181     | SEG35    | 1982.5 | 1545   |
| 182     | SEG36    | 1917.5 | 1545   |
| 183     | SEG37    | 1852.5 | 1545   |
| 184     | SEG38    | 1787.5 | 1545   |
| 185     | SEG39    | 1722.5 | 1545   |
| 186     | SEG40    | 1657.5 | 1545   |
| 187     | SEG41    | 1592.5 | 1545   |
| 188     | SEG42    | 1527.5 | 1545   |
| 189     | SEG43    | 1462.5 | 1545   |
| 190     | SEG44    | 1397.5 | 1545   |
| 191     | SEG45    | 1332.5 | 1545   |
| 192     | SEG46    | 1267.5 | 1545   |
| 193     | SEG47    | 1202.5 | 1545   |
| 194     | SEG48    | 1137.5 | 1545   |
| 195     | SEG49    | 1072.5 | 1545   |
| 196     | SEG50    | 1007.5 | 1545   |
| 197     | SEG51    | 942.5  | 1545   |
| 198     | SEG52    | 877.5  | 1545   |
| 199     | SEG53    | 812.5  | 1545   |
| 200     | SEG54    | 747.5  | 1545   |

| Pad No. | Pad Name | X (μm)  | Y (μm) |
|---------|----------|---------|--------|
| 201     | SEG55    | 682.5   | 1545   |
| 202     | SEG56    | 617.5   | 1545   |
| 203     | SEG57    | 552.5   | 1545   |
| 204     | SEG58    | 487.5   | 1545   |
| 205     | SEG59    | 422.5   | 1545   |
| 206     | SEG60    | 357.5   | 1545   |
| 207     | SEG61    | 292.5   | 1545   |
| 208     | SEG62    | 227.5   | 1545   |
| 209     | SEG63    | 162.5   | 1545   |
| 210     | SEG64    | 97.5    | 1545   |
| 211     | SEG65    | 32.5    | 1545   |
| 212     | SEG66    | -32.5   | 1545   |
| 213     | SEG67    | -97.5   | 1545   |
| 214     | SEG68    | -162.5  | 1545   |
| 215     | SEG69    | -227.5  | 1545   |
| 216     | SEG70    | -292.5  | 1545   |
| 217     | SEG71    | -357.5  | 1545   |
| 218     | SEG72    | -422.5  | 1545   |
| 219     | SEG73    | -487.5  | 1545   |
| 220     | SEG74    | -552.5  | 1545   |
| 221     | SEG75    | -617.5  | 1545   |
| 222     | SEG76    | -682.5  | 1545   |
| 223     | SEG77    | -747.5  | 1545   |
| 224     | SEG78    | -812.5  | 1545   |
| 225     | SEG79    | -877.5  | 1545   |
| 226     | SEG80    | -942.5  | 1545   |
| 227     | SEG81    | -1007.5 | 1545   |
| 228     | SEG82    | -1072.5 | 1545   |
| 229     | SEG83    | -1137.5 | 1545   |
| 230     | SEG84    | -1202.5 | 1545   |
| 231     | SEG85    | -1267.5 | 1545   |
| 232     | SEG86    | -1332.5 | 1545   |
| 233     | SEG87    | -1397.5 | 1545   |
| 234     | SEG88    | -1462.5 | 1545   |
| 235     | SEG89    | -1527.5 | 1545   |
| 236     | SEG90    | -1592.5 | 1545   |
| 237     | SEG91    | -1657.5 | 1545   |
| 238     | SEG92    | -1722.5 | 1545   |
| 239     | SEG93    | -1787.5 | 1545   |
| 240     | SEG94    | -1852.5 | 1545   |

| Pad No. | Pad Name | X (μm)  | Y (μm) |
|---------|----------|---------|--------|
| 241     | SEG95    | -1917.5 | 1545   |
| 242     | SEG96    | -1982.5 | 1545   |
| 243     | SEG97    | -2047.5 | 1545   |
| 244     | SEG98    | -2112.5 | 1545   |
| 245     | SEG99    | -2177.5 | 1545   |
| 246     | SEG100   | -2242.5 | 1545   |
| 247     | SEG101   | -2307.5 | 1545   |
| 248     | SEG102   | -2372.5 | 1545   |
| 249     | SEG103   | -2437.5 | 1545   |
| 250     | SEG104   | -2502.5 | 1545   |
| 251     | SEG105   | -2567.5 | 1545   |
| 252     | SEG106   | -2632.5 | 1545   |
| 253     | SEG107   | -2697.5 | 1545   |
| 254     | SEG108   | -2762.5 | 1545   |
| 255     | SEG109   | -2827.5 | 1545   |
| 256     | SEG110   | -2892.5 | 1545   |
| 257     | SEG111   | -2957.5 | 1545   |
| 258     | SEG112   | -3022.5 | 1545   |
| 259     | SEG113   | -3087.5 | 1545   |
| 260     | SEG114   | -3152.5 | 1545   |
| 261     | SEG115   | -3217.5 | 1545   |
| 262     | SEG116   | -3282.5 | 1545   |
| 263     | SEG117   | -3347.5 | 1545   |
| 264     | SEG118   | -3412.5 | 1545   |
| 265     | SEG119   | -3477.5 | 1545   |
| 266     | SEG120   | -3542.5 | 1545   |
| 267     | SEG121   | -3607.5 | 1545   |
| 268     | SEG122   | -3672.5 | 1545   |
| 269     | SEG123   | -3737.5 | 1545   |
| 270     | SEG124   | -3802.5 | 1545   |
| 271     | SEG125   | -3867.5 | 1545   |
| 272     | SEG126   | -3932.5 | 1545   |
| 273     | SEG127   | -3997.5 | 1545   |
| 274     | SEG128   | -4062.5 | 1545   |
| 275     | SEG129   | -4127.5 | 1545   |
| 276     | SEG130   | -4192.5 | 1545   |
| 277     | SEG131   | -4257.5 | 1545   |
| 278     | DUMMY    | -4322.5 | 1545   |
| 279     | DUMMY    | -4387.5 | 1545   |
| 280     | DUMMY    | -4452.5 | 1545   |

| Pad No. | Pad Name | X (μm)  | Y (μm) |
|---------|----------|---------|--------|
| 281     | DUMMY    | -4517.5 | 1545   |
| 282     | DUMMY    | -4582.5 | 1545   |
| 283     | DUMMY    | -4647.5 | 1545   |
| 284     | DUMMY    | -4712.5 | 1545   |
| 285     | DUMMY    | -4777.5 | 1545   |
| 286     | DUMMY    | -4842.5 | 1545   |
| 287     | DUMMY    | -4907.5 | 1545   |
| 288     | DUMMY    | -4972.5 | 1545   |
| 289     | DUMMY    | -5037.5 | 1545   |
| 290     | DUMMY    | -5102.5 | 1545   |
| 291     | DUMMY    | -5167.5 | 1545   |
| 292     | DUMMY    | -5340   | 1366.8 |
| 293     | DUMMY    | -5340   | 1301.8 |
| 294     | DUMMY    | -5340   | 1236.8 |
| 295     | COM24    | -5340   | 1171.8 |
| 296     | COM25    | -5340   | 1106.8 |
| 297     | COM26    | -5340   | 1041.8 |
| 298     | COM27    | -5340   | 976.8  |
| 299     | COM28    | -5340   | 911.8  |
| 300     | COM29    | -5340   | 846.8  |
| 301     | COM30    | -5340   | 781.8  |
| 302     | COM31    | -5340   | 716.8  |
| 303     | COM32    | -5340   | 651.8  |
| 304     | COM33    | -5340   | 586.8  |
| 305     | COM34    | -5340   | 521.8  |
| 306     | COM35    | -5340   | 456.8  |
| 307     | COM36    | -5340   | 391.8  |

| Pad No. | Pad Name | X (μm) | Y (μm)  |
|---------|----------|--------|---------|
| 308     | COM37    | -5340  | 326.8   |
| 309     | COM38    | -5340  | 261.8   |
| 310     | COM39    | -5340  | 196.8   |
| 311     | COM40    | -5340  | 131.8   |
| 312     | COM41    | -5340  | 66.8    |
| 313     | COM42    | -5340  | 1.8     |
| 314     | COM43    | -5340  | -63.2   |
| 315     | COM44    | -5340  | -128.2  |
| 316     | COM45    | -5340  | -193.2  |
| 317     | COM46    | -5340  | -258.2  |
| 318     | COM47    | -5340  | -323.2  |
| 319     | COMS0    | -5340  | -388.2  |
| 320     | DUMMY    | -5340  | -453.2  |
| 321     | DUMMY    | -5340  | -518.2  |
| 322     | DUMMY    | -5340  | -583.2  |
| 323     | DUMMY    | -5340  | -648.2  |
| 324     | DUMMY    | -5340  | -713.2  |
| 325     | DUMMY    | -5340  | -778.2  |
| 326     | DUMMY    | -5340  | -843.2  |
| 327     | DUMMY    | -5340  | -908.2  |
| 328     | DUMMY    | -5340  | -973.2  |
| 329     | DUMMY    | -5340  | -1038.2 |
| 330     | DUMMY    | -5340  | -1103.2 |
| 331     | DUMMY    | -5340  | -1168.2 |
| 332     | DUMMY    | -5340  | -1233.2 |
| 333     | DUMMY    | -5340  | -1298.2 |
| 334     | DUMMY    | -5340  | -1363.2 |

## NOTICE

1. The information contained herein can change without notice owing to product and/or technical improvements. Before using the product, please make sure that the information being referred to is up-to-date.
2. The outline of action and examples for application circuits described herein have been chosen as an explanation for the standard action and performance of the product. When planning to use the product, please ensure that the external conditions are reflected in the actual circuit, assembly, and program designs.
3. When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges including, but not limited to, operating voltage, power dissipation, and operating temperature.
4. Oki assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters beyond the specified maximum ratings or operation outside the specified operating range.
5. Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of the product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.
6. The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property, or death or injury to humans. Such applications include, but are not limited to, traffic and automotive equipment, safety devices, aerospace equipment, nuclear power control, medical equipment, and life-support systems.
7. Certain products in this document may need government approval before they can be exported to particular countries. The purchaser assumes the responsibility of determining the legality of export of these products and will take appropriate and necessary steps at their own expense for these.
8. No part of the contents contained herein may be reprinted or reproduced without our prior permission.
9. MS-DOS is a registered trademark of Microsoft Corporation.