

MN39571PT

9.2mm (type-1/2) 2,310k pixel CCD Area Image Sensor


Overview

The MN39571PT is a super high resolution CCD area image sensor which includes 2,310k pixels in type-1/2 image format size.

Adopting RGB Bayer arrangement in primary color filter array on chip provides excellent color reproduction. As the aspect ratio of image area is 3:2 which is the same as that of 35mm film, pictures can be taken in similar framing manner to use of a usual film camera.

As The MN39571PT has also a skipping readout mode for image monitoring by LCD panel, you can fix the composition in real time.

Part Number	Size	System	Color or B/W
MN39571PT	9.2mm(type-1/2)	IS	Color

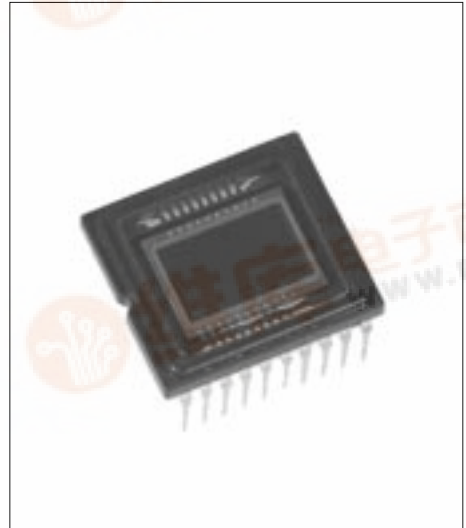


Features

- Photographic grade super high resolution by 2,310k pixels in type-1/2 format
- Responds to 5:1 skipping readout mode for LCD monitoring
- The same aspect ratio of 3:2 as a 35mm film
- Newly developed package small plastic package
Outline dimensions : 14.0mm(W) × 12.4mm(D) × 3.4mm(t)(Without lead pins)


Applications

- Digital still camera
- FA, OA cameras

Device Configuration Diagram

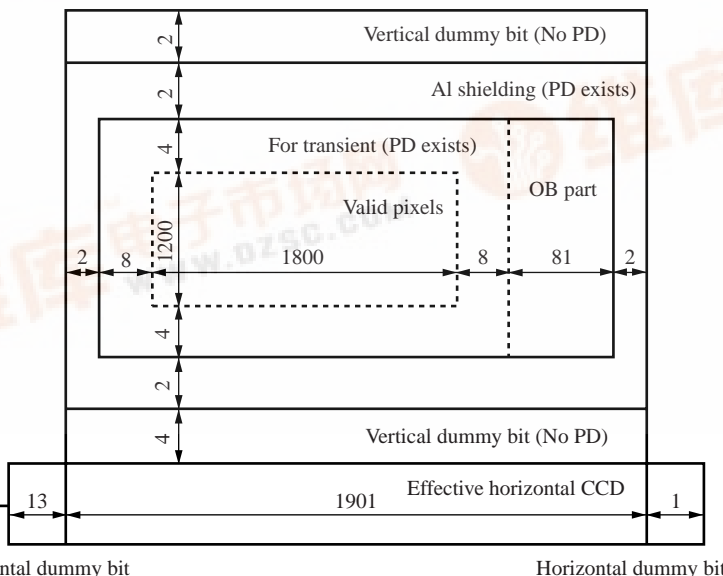

■ Pin Assignments

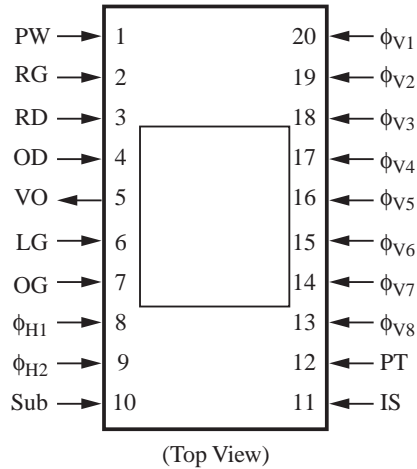

■ Pin Descriptions

Pin No.	Symbol	Descriptions	Pin No.	Symbol	Descriptions
1	PW	P-well	14	ϕ_{V7}	Vertical shift register clock pulse 7
2	RG	Reset gate			
3	RD	Reset drain	15	ϕ_{V6}	Vertical shift register clock pulse 6
4	OD	Output drain			
5	VO	Video output	16	ϕ_{V5}	Vertical shift register clock pulse 5
6	LG	Output load transistor gate			
7	OG	Output gate	17	ϕ_{V4}	Vertical shift register clock pulse 4
8	ϕ_{H1}	Horizontal register clock pulse (1)			
9	ϕ_{H2}	Horizontal register clock pulse (2)	18	ϕ_{V3}	Vertical shift register clock pulse 3
10	Sub	Substrate			
11	IS	Horizontal CCD input source	19	ϕ_{V2}	Vertical shift register clock pulse 2
12	PT	P-well for protection circuit			
13	ϕ_{V8}	Vertical shift register clock pulse 8	20	ϕ_{V1}	Vertical shift register clock pulse 1

■ Absolute Maximum Ratings and Operating Conditions



Parameter		Symbol	Rating		Operating condition			Unit
			min	max	min	typ	max	
Output drain voltage		V_{OD}	-0.2	18.0	15.2	15.5	15.8	V
Reset drain voltage		V_{RD}	-0.2	18.0	15.2	15.5	15.8	V
Input source voltage		V_{IS}	-0.2	18.0	15.2	15.5	15.8	V
Protection P-well voltage		V_{PT} *2	-10.0	0.2	-9.3	-9.0	-8.7	V
P-well voltage		V_{PW}	Reference voltage		—	0	—	V
Output load transistor gate voltage		V_{LG}	—	—	Supplied internally			V
Output gate voltage		V_{OG}	—	—	Supplied internally			V
Reset pulse voltage	H-L	$V_{\phi RG(H-L)}$ *3	—	8.0	3.0	3.3	3.6	V
	Bias	$V_{\phi RG(Bias)}$ *3	-0.5	—	Supplied internally			V
Horizontal register clock pulse voltage 1		$V_{\phi H1(H)}$	—	8.0	3.0	3.3	3.6	V
		$V_{\phi H1(L)}$	-0.2	—	-0.2	0	0.2	
Horizontal register clock pulse voltage 2		$V_{\phi H2(H)}$	—	8.0	3.0	3.3	3.6	V
		$V_{\phi H2(L)}$	-0.2	—	-0.2	0	0.2	
Vertical shift register clock pulse voltage 1,5		$V_{\phi V1,5(H)}$ *2	—	18.0	15.2	15.5	15.8	V
		$V_{\phi V1,5(M)}$ *2	—	—	-0.2	0	0.2	
		$V_{\phi V1,5(L)}$ *2	-10.0	—	-9.3	-9.0	-8.7	
Vertical shift register clock pulse voltage 3,7		$V_{\phi V3,7(H)}$ *2	—	18.0	15.2	15.5	15.8	V
		$V_{\phi V3,7(M)}$ *2	—	—	-0.2	0	0.2	
		$V_{\phi V3,7(L)}$ *2	-10.0	—	-9.3	-9.0	-8.7	
Vertical shift register clock pulse voltage 2,6		$V_{\phi V2,6(M)}$ *2	—	15.0	-0.2	0	0.2	V
		$V_{\phi V2,6(L)}$ *2	-10.0	—	-9.3	-9.0	-8.7	
Vertical shift register clock pulse voltage 4,8		$V_{\phi V4,8(M)}$ *2	—	15.0	-0.2	0	0.2	V
		$V_{\phi V4,8(L)}$ *2	-10.0	—	-9.3	-9.0	-8.7	
Substrate voltage		V_{Sub} *2	Supplied internally				V	
		ϕV_{Sub} *4,*5	-0.2	45.0	26.5	27.0		27.5
Operating temperature		T_{opr}	-10	60	—	25	—	°C
Storage temperature		T_{stg}	-30	70	—	—	—	°C

Note)1. Standard light input defines

Standard light input is the one when the exposure is done at a lens aperture of F8, using a light source of 2856 K and 1050 nt, and placing a color temperature conversion filter LB-40 (HOYA) and an IR cutting filter CAW-500 (t = 2.5 mm) in the light path.

- 2. *1: V_{Sub} internal settings guarantee blooming at 400 times light input of the standard light input.
- 3. *2: V_{PT} is set so that the following conditions are set for VL of the vertical shift clock.

$$V_{PT} \leq VL$$

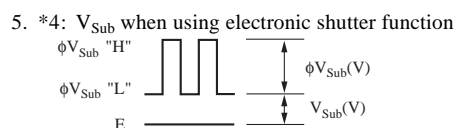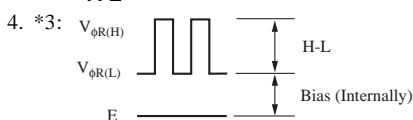

- 6. *5: Separate power supply is recommended for ϕV_{Sub}

■ Optical Characteristics

Part Number	Color or B/W	Effective pixels		S/N typ (dB)	Saturation output typ (mV)	Sensitivity F8 typ (mV)	Vertical smear Sm typ(%)	Image lag typ (%)	Horizontal resolution typ (TV-lines)	Vertical resolution typ (TV-lines)
		H	V							
MN39571PT	Color	1816	1208	—	500	340	0.01	—	—	—

Note)1. 1/7.5 sec frame storage. Horizontal register clock frequency 24 MHz

2. *1: Mechanical shutter saturation output

■ Package Dimensions (Unit : mm)

- WDIP020-P-0500A

