

Hybrid Power Splitter/Combiner, P/N : MPS2050



FEATURES


- Two-way 0-deg. Hybrid Power Splitter/Combiner
- Low Price
- EMI Shielded
- Hermetic Sealed
- Compact Design

SPECIFICATIONS


- Frequency Range [MHz] : 0.25 - 300
- In/Out Impedance [Ohm] : 50
- Isolation [dB] : 15 min.
- Insertion Loss : 1 dB max. above 3 dB
- Phase Unbalance :
 - 2-deg. @ Lower cut-off frequency
 - 5-deg. @ Higher cut-off frequency

OUTLINE DRAWING

UNIT : INCH(mm)

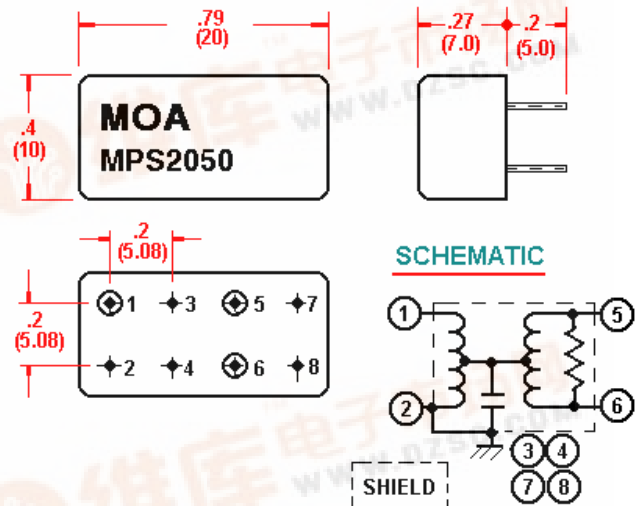

TYPICAL INSERTION LOSS

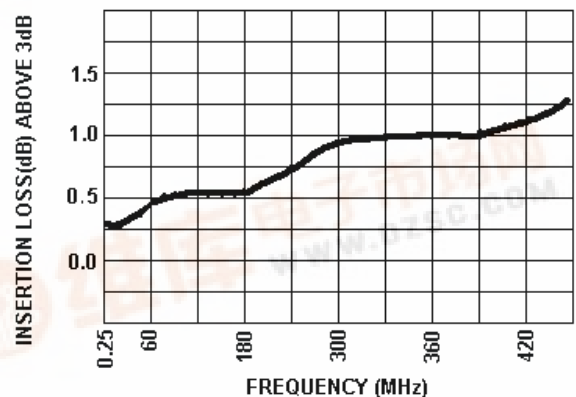

TYPICAL ISOLATION

