

SIDE LOOK PACKAGE SOLID STATE LAMP

MSL-824B

Description

The MSL-824B is designed based on an industry standard package for ease of handling and use.


The package is water clear epoxy within white plasti

Package Dimensions

Units: mm

Applications

- LCD backlighting
- Symbol backlighting
- Front panel indicator

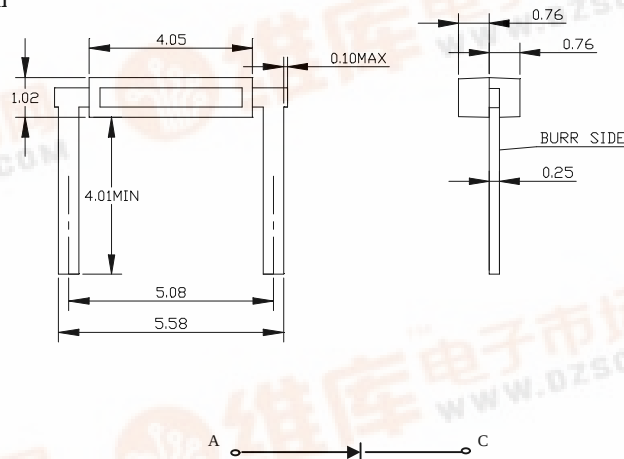

Features

- High performance
- Excellent chip to chip consistency
- High reliability

Notes :

1. All dimensions are in millimeters.
2. Tolerance is ± 0.1 mm unless otherwise noted.

Absolute Maximum Ratings

@ $T_A = 25^\circ\text{C}$

Parameter	Symbol	Maximum Rating	Unit
Power Dissipation	P _{ad}	100	mW
Continuous Forward Current	I _{af}	25	mA
Reverse Current(V _R =5V)	I _R	10	μA
Operating Temperature Range	T _{opr}	-40°C to +85°C	
Storage Temperature Range	T _{stg}	-40°C to +85°C	
Lead Soldering Temperature 260°C for 5 second (2.0mm From Body)			

Optical-Electrical Characteristics

'@ $T_A=25^{\circ}\text{C}$

PART NO	Color		Dominant Wave Length $\lambda_D(\text{nm})$	Spectral Halfwidth $\Delta\lambda(\text{nm})$	Forward Voltage @ $I_F=20\text{mA}$ (V)		Luminous Intensity @ $I_F=20\text{mA}$ (mcd)		Viewing Angle $2\theta_{1/2}$ (deg)
	Emitted	Lens			TYP	MAX	MIN	TYP	
MSL-824B	Blue	Water Clear	470	26	3.6	4.0	40	60	110

Typical Optical-Electrical Characteristic Curves

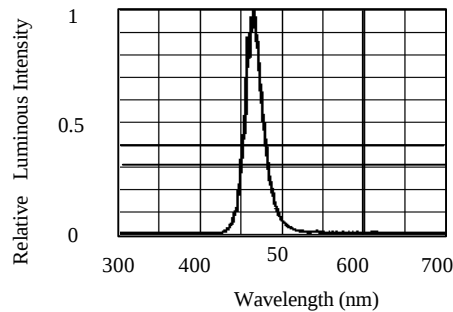


FIG.1 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

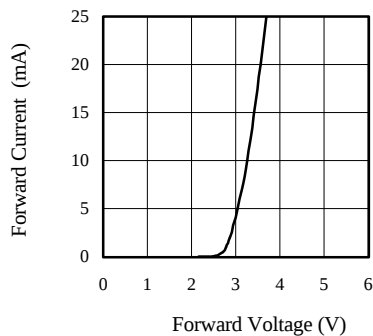


FIG.2 FORWARD CURRENT VS. FORWARD VOLTAGE

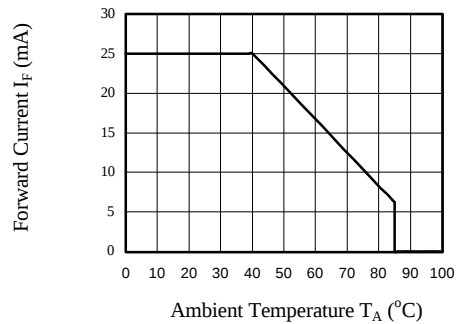


FIG.3 FORWARD CURRENT VS. AMBIENT TEMPERATURE

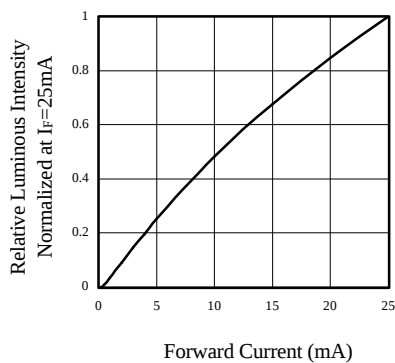


FIG.4 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

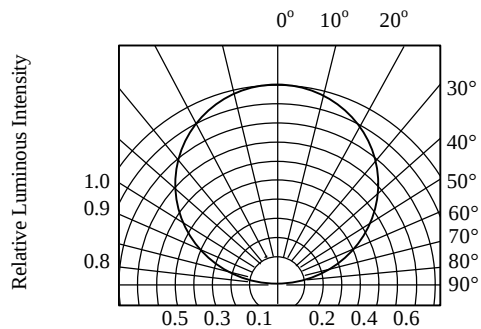


FIG.5 RADIATION PATTERN DIAGRAM