

**MOTOROLA  
SEMICONDUCTOR  
TECHNICAL DATA**

*Designer's Data Sheet*  
**Power Field Effect Transistor**  
**N-Channel Enhancement-Mode**  
**Silicon Gate TMOS**


These TMOS Power FETs are designed for high voltage, high speed power switching applications such as switching regulators, converters, solenoid and relay drivers.

- Silicon Gate for Fast Switching Speeds — Switching Times Specified at 100°C
- Designer's Data —  $I_{DSS}$ ,  $V_{DS(on)}$ ,  $V_{GS(th)}$  and SOA Specified at Elevated Temperature
- Rugged — SOA is Power Dissipation Limited
- Source-to-Drain Diode Characterized for Use With Inductive Loads



**MTH6N55  
MTH6N60  
MTM6N60**

**TMOS POWER FETs**  
**6 AMPERES**  
 $r_{DS(on)} = 1.2 \text{ OHMS}$   
**550 and 600 VOLTS**



**MAXIMUM RATINGS**

Rating	Symbol	MTH6N55	MTH6N60 MTM6N60	Unit
Drain-Source Voltage	$V_{DS}$	550	600	Vdc
Drain-Gate Voltage ( $R_{GS} = 1 \text{ M}\Omega$ )	$V_{DGR}$	550	600	Vdc
Gate-Source Voltage Continuous Non-repetitive ( $t_p \leq 50 \mu\text{s}$ )	$V_{GS}$ $V_{GSM}$	$\pm 20$ $\pm 40$		Vdc Vpk
Drain Current Continuous Pulsed	$I_D$ $I_{DM}$	6 30		Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	150 1.2		Watts W/°C
Operating and Storage Temperature Range	$T_J, T_{stg}$	-65 to 150		°C

**THERMAL CHARACTERISTICS**

Thermal Resistance — Junction to Case — Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	0.83 30		°C/W
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 5 seconds	$T_L$	275		°C


**ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$  unless otherwise noted)**

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

**OFF CHARACTERISTICS**

Drain-Source Breakdown Voltage ( $V_{GS} = 0, I_D = 0.25 \text{ mA}$ ) MTH6N55 MTH6N60, MTM6N60	$V_{(BR)DSS}$	550 600	— —	Vdc
Zero Gate Voltage Drain Current ( $V_{DS} = \text{Rated } V_{DSS}, V_{GS} = 0$ ) ( $V_{DS} = 0.8 \text{ Rated } V_{DSS}, V_{GS} = 0, T_J = 125^\circ\text{C}$ )	$I_{DSS}$	— —	0.2 1	mAdc

(continued)



**MTM6N60**  
**CASE 1-06**  
**TO-204AA**



**MTH6N55**  
**MTH6N60**  
**CASE 340-02**  
**TO-218AC**

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.



6367254 MOTOROLA SC (XSTRS/R F)

98D 83387 D

MTH/MTM6N55, 60

T-39-13

**ELECTRICAL CHARACTERISTICS — continued** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

**OFF CHARACTERISTICS**

Gate-Body Leakage Current, Forward ( $V_{GS} = 20\text{ Vdc}$ , $V_{DS} = 0$ )	$I_{GSSF}$	—	100	nAdc
Gate-Body Leakage Current, Reverse ( $V_{GS} = 20\text{ Vdc}$ , $V_{DS} = 0$ )	$I_{GSSR}$	—	100	nAdc

**ON CHARACTERISTICS\***

Gate Threshold Voltage ( $V_{DS} = V_{GS}$ , $I_D = 1\text{ mA}$ ) $T_J = 100^\circ\text{C}$	$V_{GS(th)}$	2 1.5	4.5 4	Vdc
Static Drain-Source On-Resistance ( $V_{GS} = 10\text{ Vdc}$ , $I_D = 3\text{ Adc}$ )	$r_{DS(on)}$	—	1.2	Ohms
Drain-Source On-Voltage ( $V_{GS} = 10\text{ V}$ ) ( $I_D = 6\text{ Adc}$ ) ( $I_D = 3\text{ Adc}$ , $T_J = 100^\circ\text{C}$ )	$V_{DS(on)}$	— —	9 7.2	Vdc
Forward Transconductance ( $V_{DS} = 15\text{ V}$ , $I_D = 3\text{ A}$ )	$g_{FS}$	2	—	mhos

**DYNAMIC CHARACTERISTICS**

Input Capacitance	$(V_{DS} = 25\text{ V}$ , $V_{GS} = 0$ , $f = 1\text{ MHz}$ ) See Figure 11	$C_{iss}$	—	1800	pF
Output Capacitance		$C_{oss}$	—	350	
Reverse Transfer Capacitance		$C_{rss}$	—	150	

**SWITCHING CHARACTERISTICS\*** ( $T_J = 100^\circ\text{C}$ )

Turn-On Delay Time	$(V_{DD} = 25\text{ V}$ , $I_D = 0.5\text{ Rated } I_D$ $R_{gen} = 50\text{ ohms}$ ) See Figures 13 and 14	$t_{d(on)}$	—	60	ns
Rise Time		$t_r$	—	150	
Turn-Off Delay Time		$t_{d(off)}$	—	200	
Fall Time		$t_f$	—	120	
Total Gate Charge	$(V_{DS} = 0.8\text{ Rated } V_{DSS}$ , $I_D = \text{Rated } I_D$ , $V_{GS} = 10\text{ V}$ ) See Figure 12	$Q_g$	55 (Typ)	65	nC
Gate-Source Charge		$Q_{gs}$	25 (Typ)	—	
Gate-Drain Charge		$Q_{gd}$	30 (Typ)	—	

**SOURCE DRAIN DIODE CHARACTERISTICS\***

Forward On-Voltage	$(I_S = \text{Rated } I_D$ $V_{GS} = 0$ )	$V_{SD}$	1 (Typ)	1.4	Vdc
Forward Turn-On Time		$t_{on}$	Limited by stray inductance		
Reverse Recovery Time		$t_{rr}$	600 (Typ)	—	ns

**INTERNAL PACKAGE INDUCTANCE (TO-204)**

Internal Drain Inductance (Measured from the contact screw on the header closer to the source pin and the center of the die)	$L_d$	5 (Typ)	—	nH
Internal Source Inductance (Measured from the source pin, 0.25" from the package to the source bond part)	$L_s$	12.5 (Typ)	—	

**INTERNAL PACKAGE INDUCTANCE (TO-218)**

Internal Drain Inductance (Measured from screw on tab to center of die) (Measured from the drain lead 0.25" from package to center of die)	$L_d$	4 (Typ) 5 (Typ)	—	nH
Internal Source Inductance (Measured from the source lead 0.25" from package to center of die)	$L_s$	10 (Typ)	—	

\*Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

6367254 MOTOROLA SC (XSTRS/R F)

98D 83388 D

MTH/MTM6N55, 60

T-39-13

TYPICAL ELECTRICAL CHARACTERISTICS

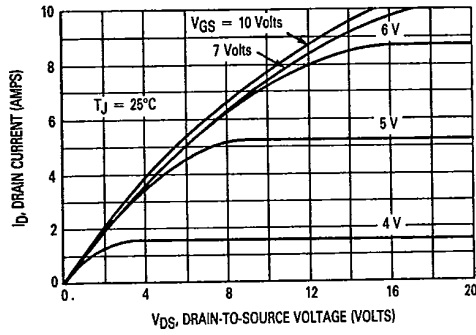


Figure 1. On-Region Characteristics

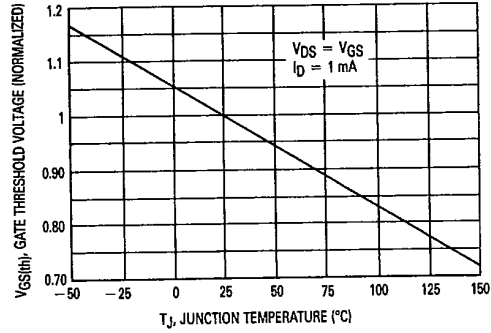


Figure 2. Gate-Threshold Voltage Variation With Temperature

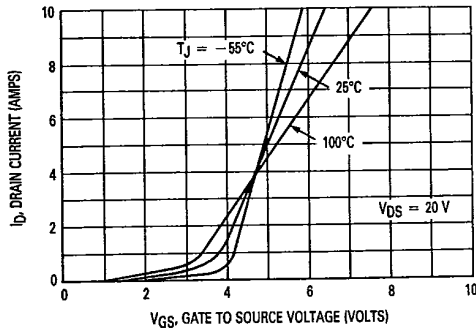


Figure 3. Transfer Characteristics

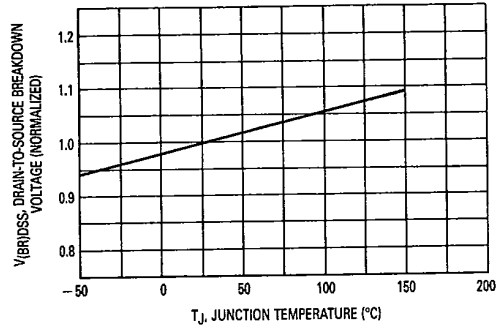


Figure 4. Breakdown Voltage Variation With Temperature

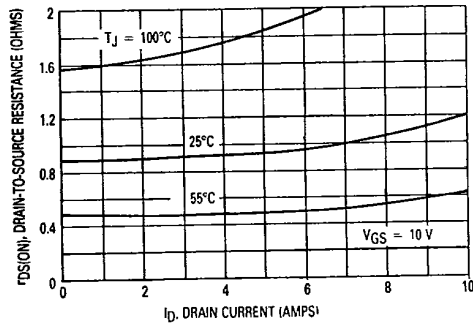


Figure 5. On-Resistance versus Drain Current

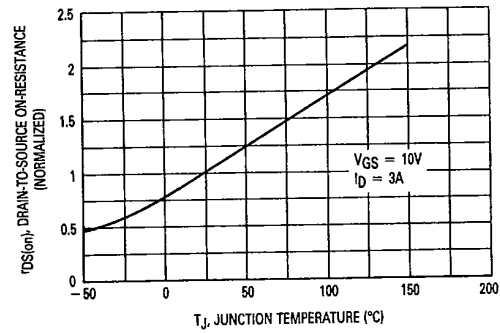


Figure 6. On-Resistance Variation With Temperature

6367254 MOTOROLA SC (XSTRS/R F)  
MTH/MTM6N55, 60

98D 83389 D

T-39-13

SAFE OPERATING AREA INFORMATION

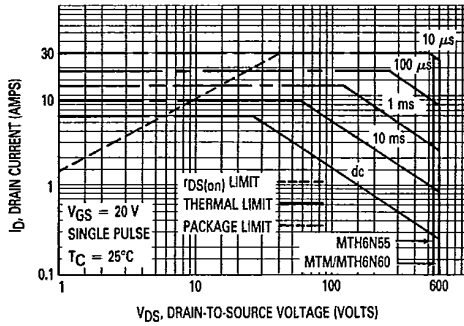


Figure 7. Maximum Rated Forward Biased Safe Operating Area

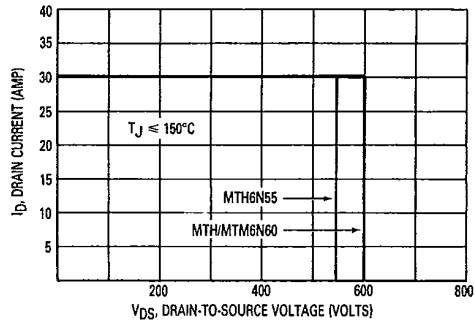


Figure 8. Maximum Rated Switching Safe Operating Area

FORWARD BIASED SAFE OPERATING AREA

The FBSOA curves define the maximum drain-to-source voltage and drain current that a device can safely handle when it is forward biased, or when it is on, or being turned on. Because these curves include the limitations of simultaneous high voltage and high current, up to the rating of the device, they are especially useful to designers of linear systems. The curves are based on a case temperature of 25°C and a maximum junction temperature of 150°C. Limitations for repetitive pulses at various case temperatures can be determined by using the thermal response curves. Motorola Application Note, AN569, "Transient Thermal Resistance-General Data and Its Use" provides detailed instructions.

SWITCHING SAFE OPERATING AREA

The switching safe operating area (SOA) of Figure 8 is the boundary that the load line may traverse without incurring damage to the MOSFET. The fundamental limits are the peak current,  $I_{DM}$  and the breakdown voltage,  $V_{(BR)DSS}$ . The switching SOA shown in Figure 8 is applicable for both turn-on and turn-off of the devices for switching times less than one microsecond.

The power averaged over a complete switching cycle must be less than:

$$\frac{T_J(max) - T_C}{R_{\theta JC}}$$

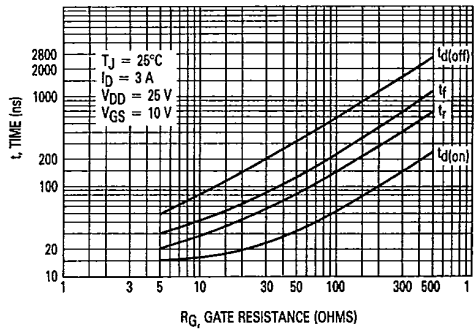


Figure 9. Resistive Switching Time Variation versus Gate Resistance

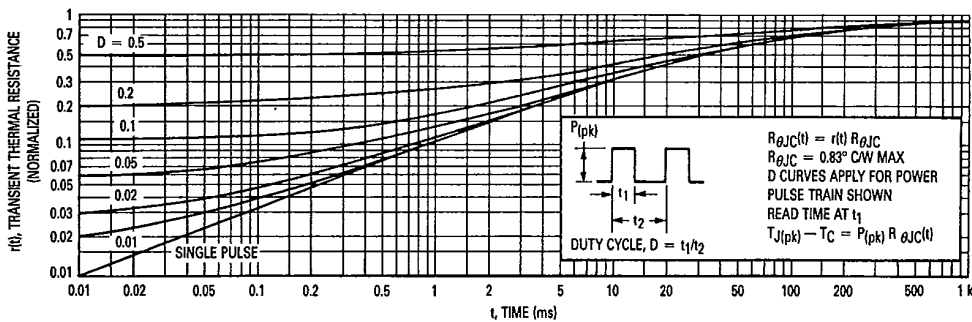


Figure 10. Thermal Response

6367254 MOTOROLA SC (XSTRS/R F)

98D 83390 D

MTH/MTM6N55, 60

T-39-13

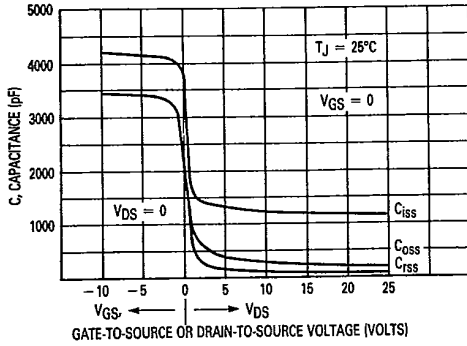


Figure 11. Capacitance Variation

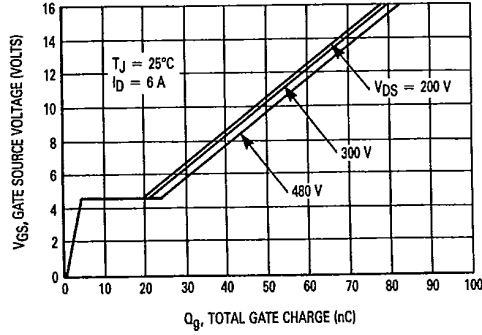


Figure 12. Gate Charge versus Gate-to-Source Voltage

RESISTIVE SWITCHING

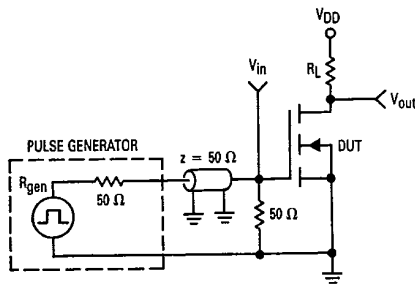


Figure 13. Switching Test Circuit

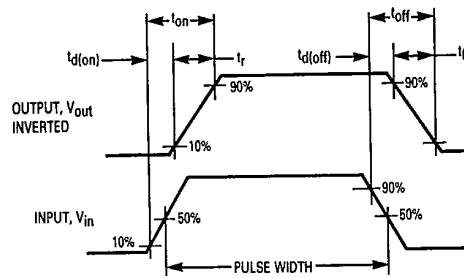


Figure 14. Switching Waveforms

OUTLINE DIMENSIONS

**CASE 1-06 TO-204AA**

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	29.27	—	1.150	—
B	—	21.08	—	0.830
C	6.35	8.25	0.250	0.325
D	0.97	1.09	0.038	0.043
E	1.40	1.77	0.055	0.070
F	30.15 BSC	—	1.187 BSC	—
G	10.92 BSC	—	0.430 BSC	—
H	5.46 BSC	—	0.215 BSC	—
J	16.89 BSC	—	0.665 BSC	—
K	11.18	12.19	0.440	0.480
Q	3.84	4.19	0.151	0.165
R	—	26.57	—	1.050
U	4.83	5.33	0.190	0.210
V	3.84	4.19	0.151	0.165

NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION INCH.  
3. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-204AA OUTLINE SHALL APPLY.

STYLE 3:  
PIN 1. GATE  
2. SOURCE  
CASE DRAIN


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.65	2.94	0.104	0.116
J	0.38	0.64	0.015	0.025
K	12.70	16.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION INCH.

**CASE 340-02 TO-218AC**

STYLE 2:  
PIN 1. GATE  
2. DRAIN  
3. SOURCE  
4. DRAIN

MOTOROLA SC (XSTRS/R F) 46E D ■ 6367254 0093290 1 ■ M0T6  
**OUTLINE DIMENSIONS** T-39-11

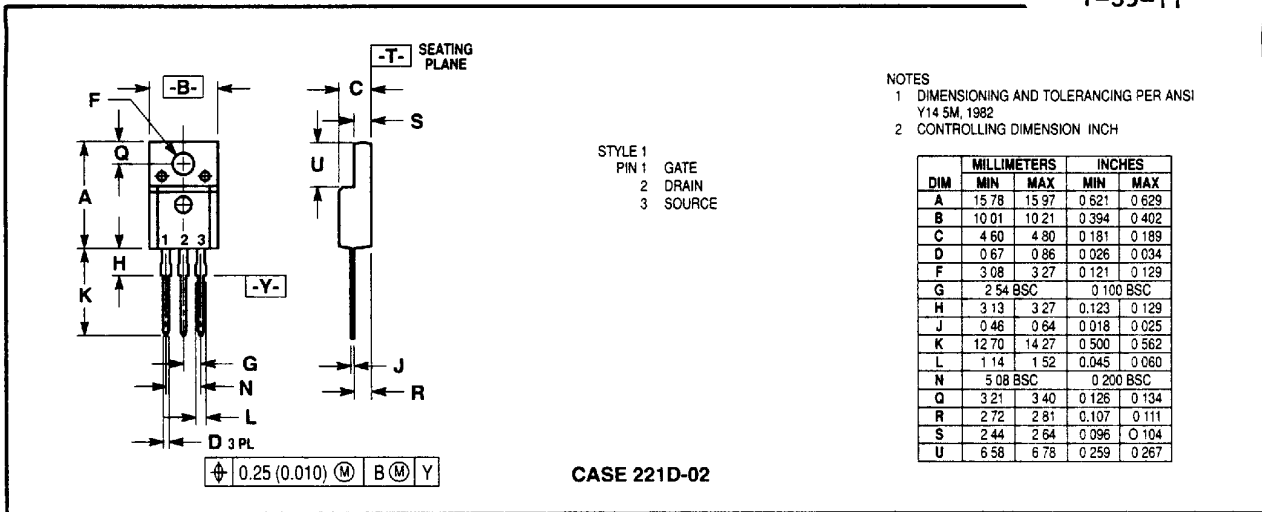

**Literature Distribution Centers:**

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Center; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.



**MOTOROLA**

MTA2N60E