


SOLID STATE LED LAMPS LCD BACKLIGHT ILLUMINATOR

PACKAGE DIMENSIONS

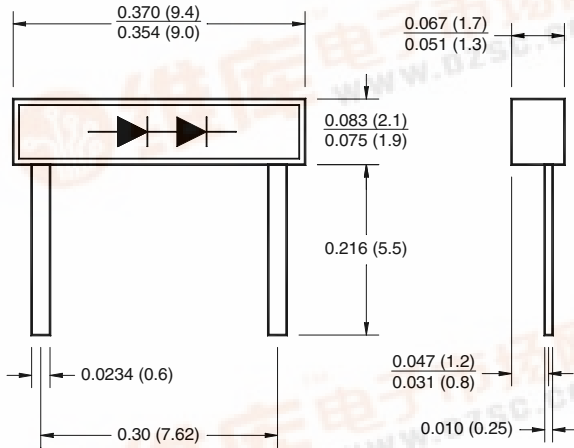

NOTE:


1. Dimensions are in inches (mm).
2. Lead spacing is measured where the leads emerge from the package.
3. Protruded resin under the flange is 1.5mm (0.059") max.
4. Tolerance is +/-0.12" (0.3mm) unless otherwise noted.

YELLOW
GREEN
ORANGE
HER

MV942-3 Clear
MV942-4 Clear
MV942-8 Clear
MV942-9 Clear

FEATURES

- Low power consumption
- Uniform lighting across entire bar



DESCRIPTION

These right angle bar illuminators have two chips connected in series. They are housed in a 2mm x 9mm white rectangular molded reflector case with a clear epoxy lens.

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise specified)

Parameter	YELLOW MV942-3	GREEN MV942-4	ORANGE MV942-8	HER MV942-9	Units
Continuous Forward Current - I _F	20	30	30	30	mA
Peak Forward Current - I _F (f = 1.0 KHz, Duty Factor = 1/10)	160	160	160	160	mA
Reverse Voltage - V _R (I _R = 10 μA)	5	5	5	5	V
Power Dissipation - P _D	85	100	100	100	mW
Operating Temperature - T _{OPR}	-40 to +85				°C
Storage Temperature - T _{STG}	-40 to +100				°C
Lead Soldering Time - T _{SOL}					
Wave	260 for 5 sec				°C
Reflow	240 for 5 sec				

SOLID STATE LED LAMPS LCD BACKLIGHT ILLUMINATOR

YELLOW	MV942-3 Clear
GREEN	MV942-4 Clear
ORANGE	MV942-8 Clear
HER	MV942-9 Clear

ELECTRICAL / OPTICAL CHARACTERISTICS (T_A =25°C)

Part Number	YELLOW MV942-3	GREEN MV942-4	ORANGE MV942-8	HER MV942-9	Condition
Luminous Intensity (mcd)					I _F = 20mA
Minimum	30	30	30	35	
Typical	45	45	45	45	
Forward Voltage (V)					I _F = 20mA
Maximum	5.6	5.6	5.6	5.6	
Typical	4.2	4.2	4.2	4.2	
Peak Wavelength (nm)	585	565	610	635	I _F = 20mA
Spectral Line Half Width (nm)	35	30	35	45	I _F = 20mA
Viewing Angle (°)	160	160	160	160	I _F = 20mA

TYPICAL PERFORMANCE CURVES

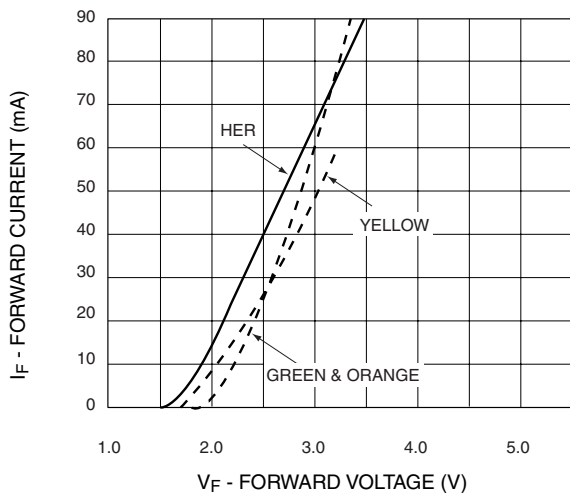


Fig. 1 Forward Current vs. Forward Voltage

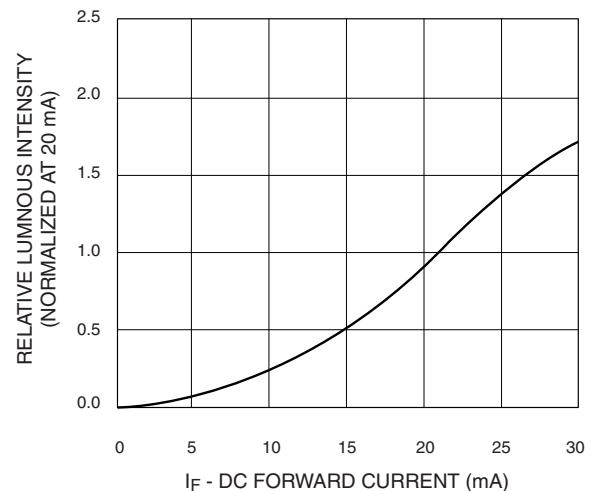


Fig. 2 Relative Luminous Intensity vs. DC Forward Current

YELLOW
GREEN
ORANGE
HER

MV942-3 Clear
MV942-4 Clear
MV942-8 Clear
MV942-9 Clear

TYPICAL PERFORMANCE CURVES

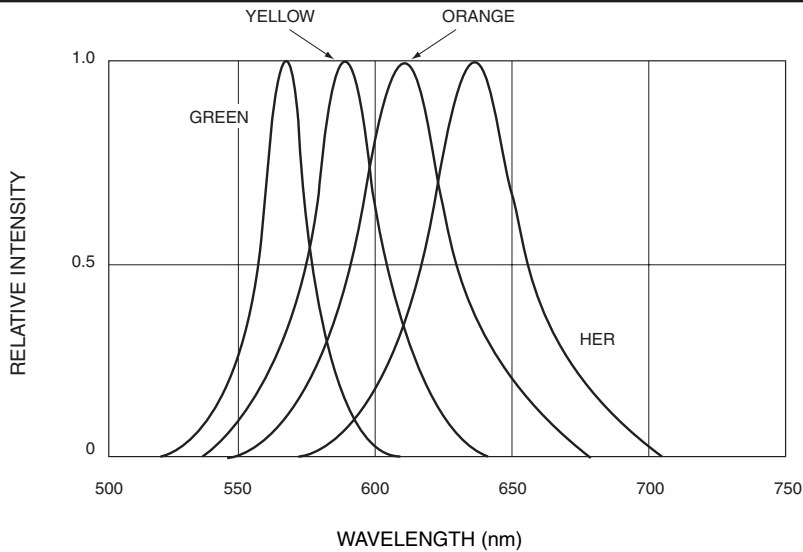


Fig. 3 Relative Intensity vs. Peak Wavelength

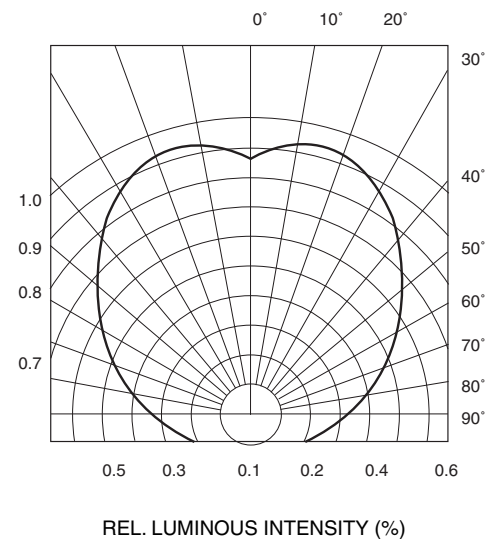


Fig. 4 Radiation Diagram


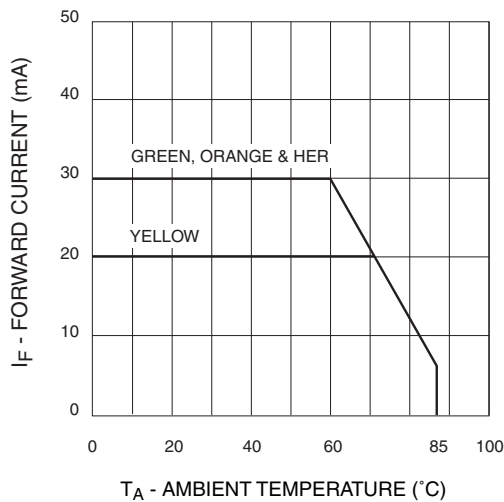


Fig. 5 Current Derating Curve

SOLID STATE LED LAMPS LCD BACKLIGHT ILLUMINATOR

YELLOW	MV942-3 Clear
GREEN	MV942-4 Clear
ORANGE	MV942-8 Clear
HER	MV942- 9 Clear

RECOMMENDED IR REFLOW SOLDERING PROFILE

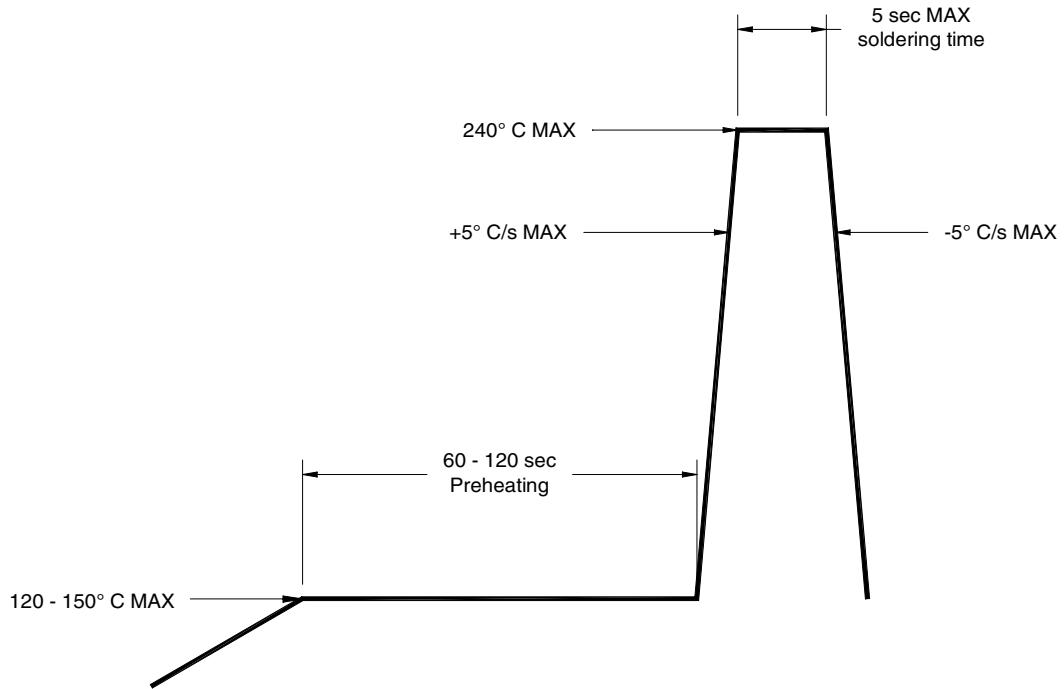

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.