

400 V - 1,000 V Rectifiers

3.0 A Forward Current

70 ns Recovery Time

1N6616 1N6617

1N6618 1N6619

AXIAL LEADED


HERMETICALLY SEALED



3

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS														
Part Number	Working Reverse Voltage	Average Rectified Current		Reverse Current @ V _{rw}		Forward Voltage		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance			Junction Cap. @50VDC @ 1kHz (C _j)
	(V _{rw})	(I _o)		(I _r)		(V _f)		25°C	25°C	25°C	θ _{J-L}			25°C
	Volts	55°C(1) Amps	100°C(2) Amps	25°C µA	100°C µA	25°C Volts	25°C Amps	Amps	Amps	ns	L=.125 °C/W	L=.375 °C/W	L=.500 °C/W	pF
1N6616	400	3.0	2.0	1.0	20	1.7	3.00	100	20	70	9	20	25	35
1N6617	600	3.0	2.0	1.0	20	1.7	3.00	100	20	70	9	20	25	35
1N6618	800	3.0	2.0	1.0	20	1.7	3.00	100	20	70	9	20	25	35
1N6619	1000	3.0	2.0	1.0	20	1.7	3.00	100	20	70	9	20	25	35

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)I_f=0.5A, I_r=1.0A, I_{rr}=0.25A • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200°C

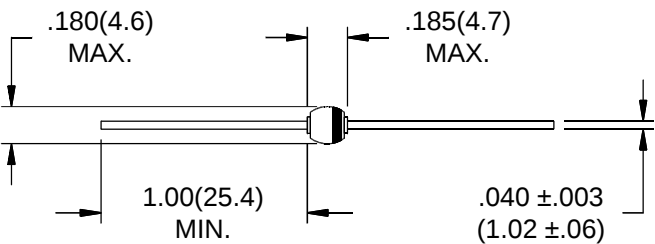






Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
 8711 W. Roosevelt Ave.
 Visalia, CA 93291

TEL 559-651-1402
 FAX 559-651-0740
www.voltagemultipliers.com

1N6616 1N6617 1N6618 1N6619

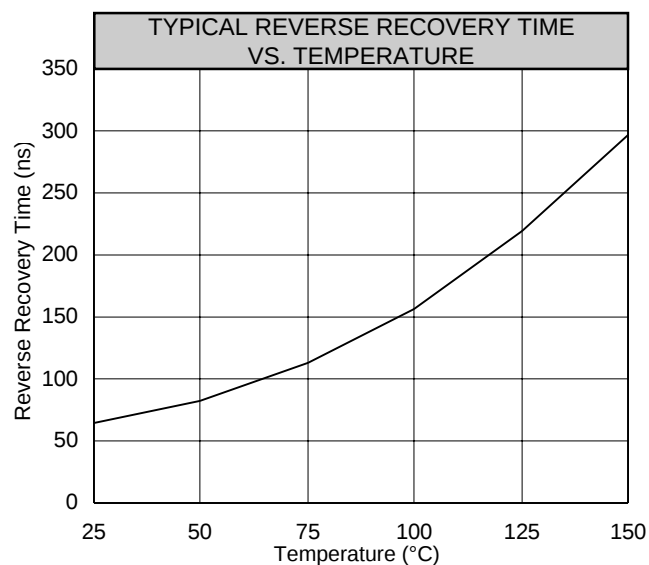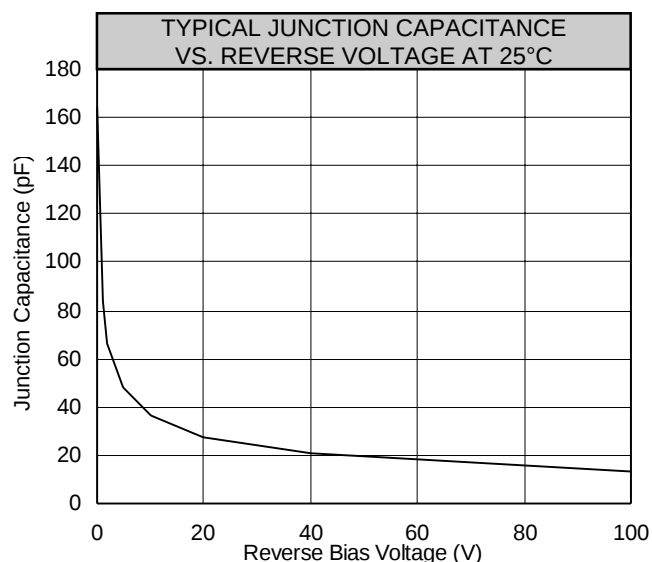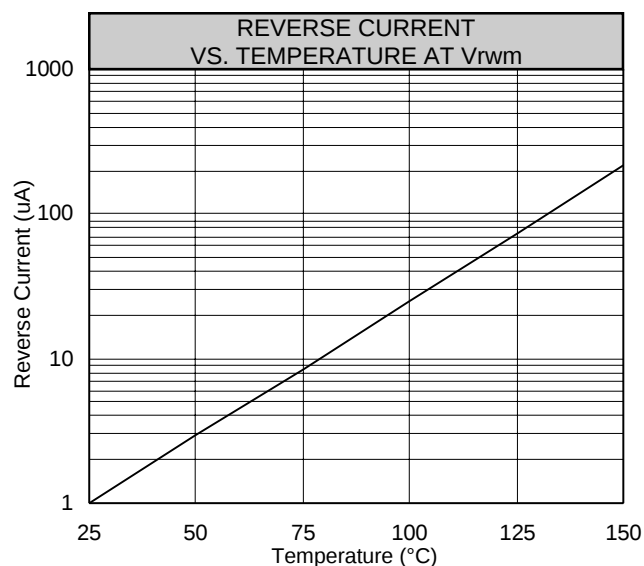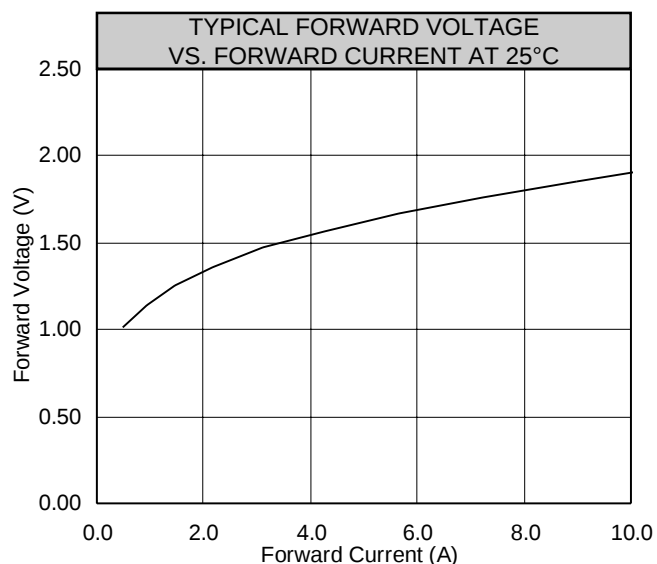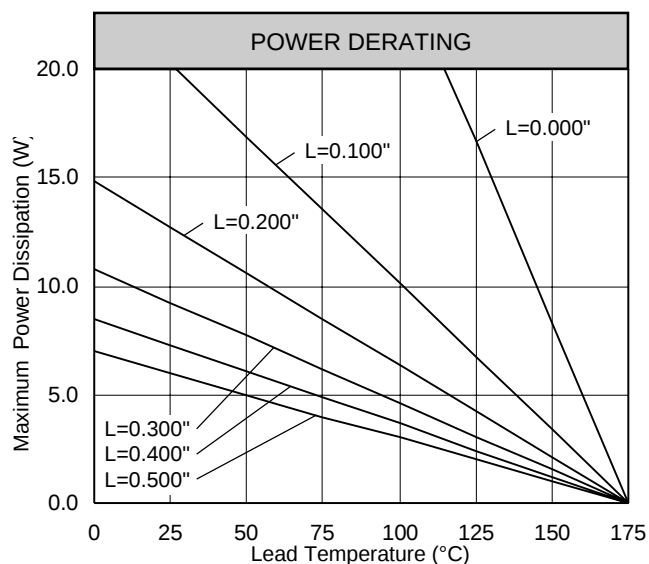

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com