

AND JANS PER MIL-PRF-19500/156

- 9.0 VOLT NOMINAL ZENER VOLTAGE
- TEMPERATURE COMPENSATED ZENER REFERENCE DIODES
- METALLURGICALLY BONDED

1N935 thru 1N938B  
and  
1N935B-1 thru 1N938B-1

**MAXIMUM RATINGS**

Operating Temperature: -65°C to +175°C  
Storage Temperature: -65°C to +175°C  
DC Power Dissipation: 500mW @ +50°C  
Power Derating: 4 mW / °C above +50°C

**REVERSE LEAKAGE CURRENT**

$I_R = 10\mu A @ 25^\circ C \ \& \ V_R = 6 \ Vdc$

**ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.**

JEDEC TYPE NUMBER	ZENER VOLTAGE $V_Z @ I_{ZT}$	ZENER TEST CURRENT $I_{ZT}$	MAXIMUM ZENER IMPEDANCE (Note 1) $Z_{ZT}$	VOLTAGE TEMPERATURE STABILITY $\Delta V_{ZT}$ MAXIMUM (Note 2)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT
	VOLTS	mA	OHMS	mV	°C	% / °C
1N935	8.55—9.45	7.5	20	67	0 to +75	0.01
1N935A	8.55—9.45	7.5	20	139	-55 to +100	0.01
1N935B	8.55—9.45	7.5	20	184	-55 to +150	0.01
1N936	8.55—9.45	7.5	20	34	0 to +75	0.005
1N936A	8.55—9.45	7.5	20	70	-55 to +100	0.005
1N936B	8.55—9.45	7.5	20	92	-55 to +150	0.005
1N937	8.55—9.45	7.5	20	13	0 to +75	0.002
1N937A	8.55—9.45	7.5	20	28	-55 to +100	0.002
1N937B	8.55—9.45	7.5	20	37	-55 to +150	0.002
1N938	8.55—9.45	7.5	20	6.7	0 to +75	0.001
1N938A	8.55—9.45	7.5	20	13.9	-55 to +100	0.001
1N938B	8.55—9.45	7.5	20	19	-55 to +150	0.001

**NOTE 1** Zener impedance is derived by superimposing on  $I_{ZT}$  A 60Hz rms a.c. current equal to 10% of  $I_{ZT}$

**NOTE 2** The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No. 5.

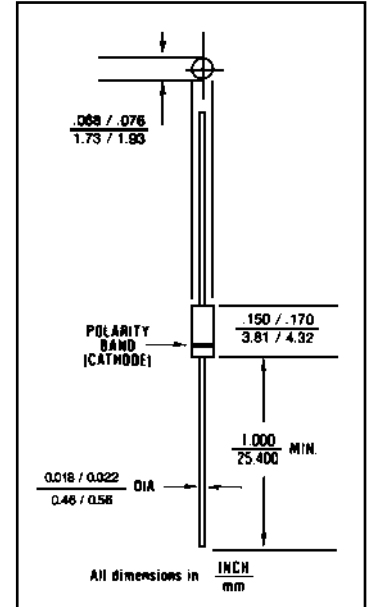


FIGURE 1

**DESIGN DATA**

**CASE:** Hermetically sealed glass case. DO – 35 outline.

**LEAD MATERIAL:** Copper clad steel.

**LEAD FINISH:** Tin / Lead

**POLARITY:** Diode to be operated with the banded (cathode) end positive.

**MOUNTING POSITION:** Any.




**COMPENSATED DEVICES INCORPORATED**


22 COREY STREET, MELROSE, MASSACHUSETTS 02176  
PHONE (781) 665-1071 FAX (781) 665-7379  
WEBSITE: <http://www.cdi-diodes.com> E-mail: [mail@cdi-diodes.com](mailto:mail@cdi-diodes.com)

# 1N935 thru 1N938B


## INCLUDING -1 VERSIONS

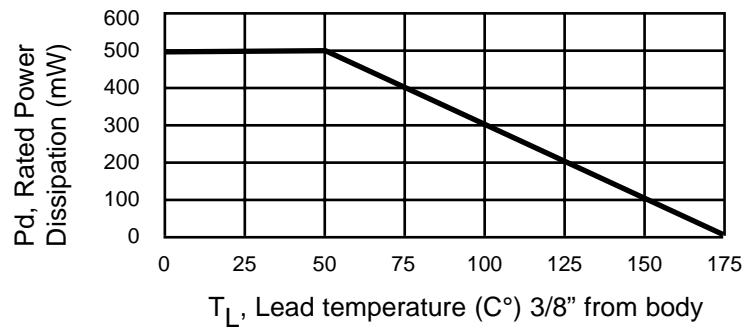

**FIGURE 2**  
**POWER DERATING CURVE**

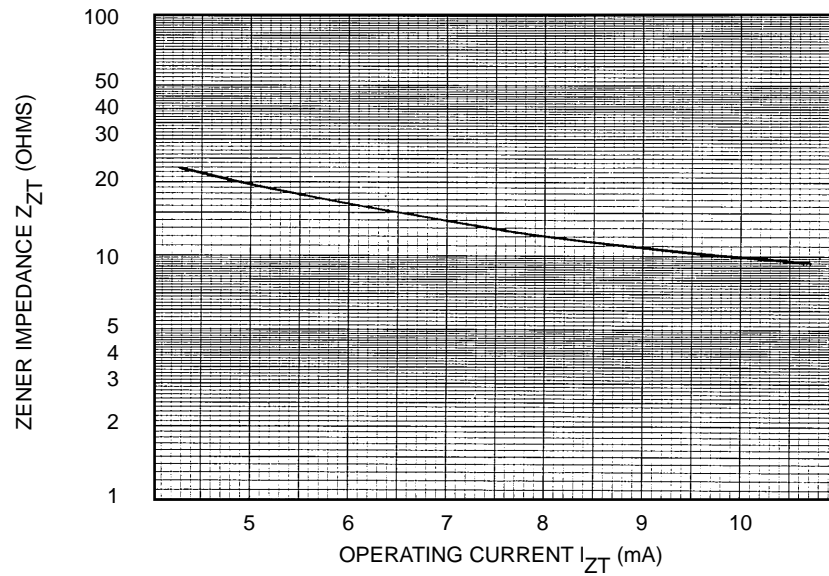

**FIGURE 3**  
**ZENER IMPEDANCE VS. OPERATING CURRENT**

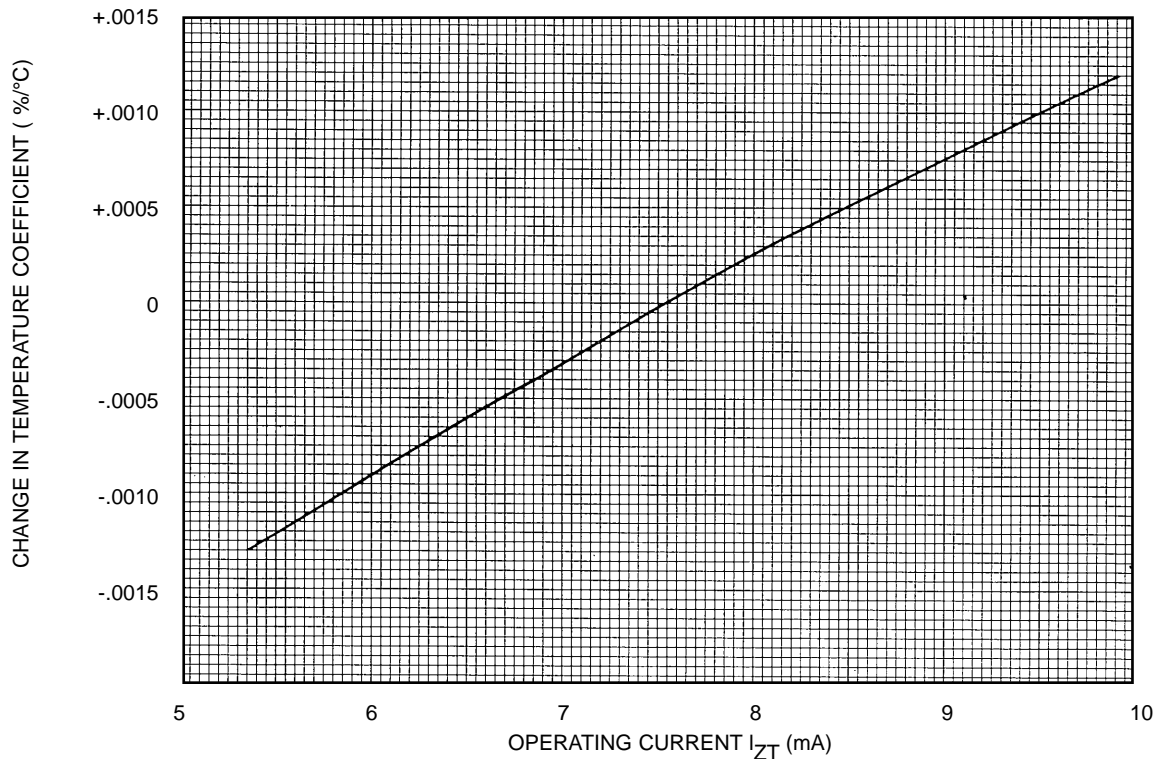

**FIGURE 4**  
**TYPICAL CHANGE OF TEMPERATURE COEFFICIENT WITH CHANGE IN OPERATING CURRENT**

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)