


NSF8AT THRU NSF8MT

GLASS PASSIVATED GENERAL PURPOSE PLASTIC RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 8.0 Amperes

ITO-220AC

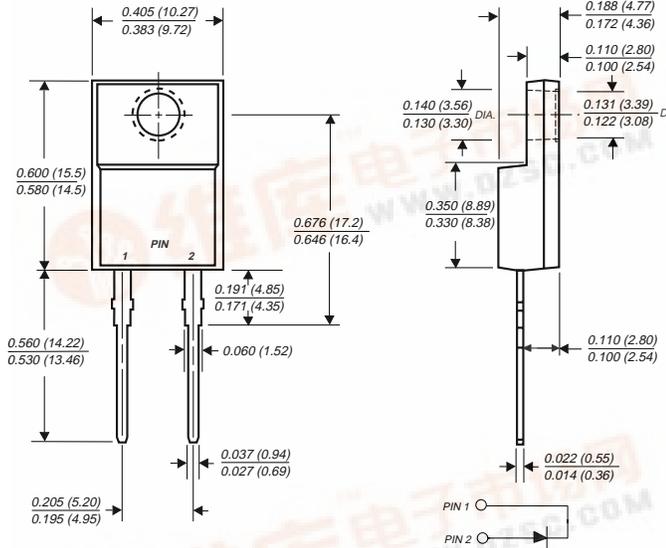

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High forward current capability
- ◆ High surge current capability
- ◆ Low forward voltage drop
- ◆ Glass passivated chip junction
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds



MECHANICAL DATA

- Case:** JEDEC ITO-220AC molded plastic body
- Terminals:** Plated leads solderable per MIL-STD-750, Method 2026
- Polarity:** As marked
- Mounting Position:** Any
- Weight:** 0.08 ounce, 2.24 grams
- Mounting Torque:** 5 in. - lbs. max.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	NSF8 AT	NSF8 BT	NSF8 DT	NSF8 GT	NSF8 JT	NSF8 KT	NSF8 MT	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current at T _C =100°C	I _(AV)	8.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	175.0							Amps
Maximum instantaneous forward voltage at 8.0A	V _F	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage	I _R	10.0 100.0							μA
Typical junction capacitance (NOTE 1)	C _J	55.0							pF
Typical thermal resistance (NOTE 2)	R _{θJC}	3.0							°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150							°C

NOTES:

- (1) Measured at 1.0 MHz and applied reversed voltage of 4.0 Volts
- (2) Thermal resistance from junction to case mounted on heatsink



RATINGS AND CHARACTERISTIC CURVES NSF8AT THRU NSF8MT

FIG. 1 - FORWARD CURRENT DERATING CURVE

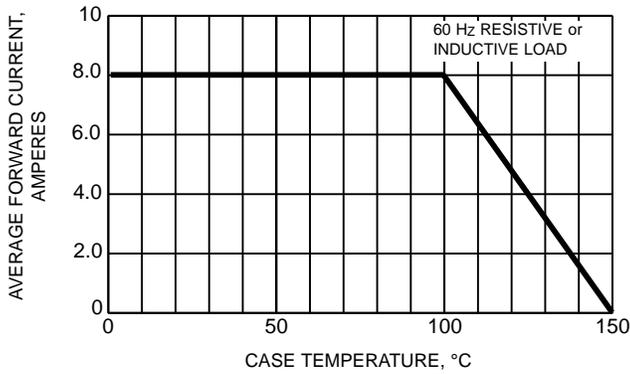


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

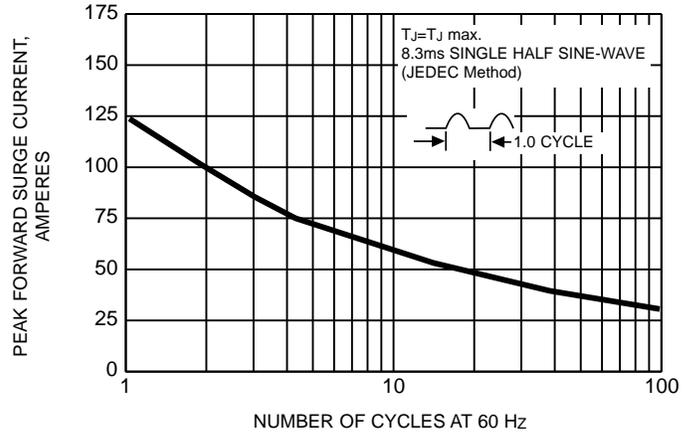


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

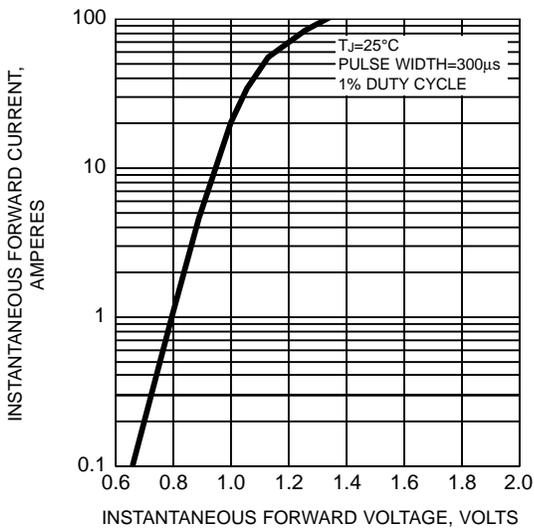


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

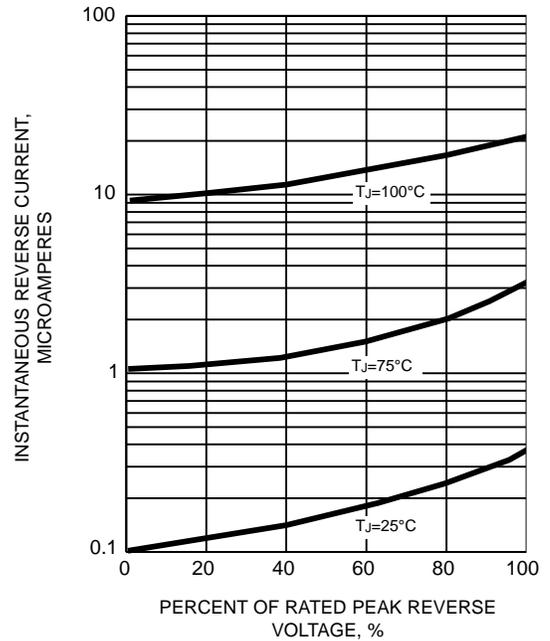


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

