


● Features

1. Current transfer ratio
CTR: MIN.60 at $I_F = \pm 1\text{mA}$ $V_{CE} = 5\text{V}$
2. High isolation voltage between input and output (Viso: 5000Vrms).
3. Compact dual-in-line package.
4. AC Input.


● Applications

1. Programmable Controller Applications for Low Input Photocouplers and High Vceo Photocouplers.
2. Telephone sets, telephone exchangers.
3. System appliances. ● Limit Switches ● Sensors ● Thermostats ● Transducers etc.
4. Signal transmission between circuits of different potentials and impedances.

1. OUTSIDE DIMENSION : UNIT (mm)

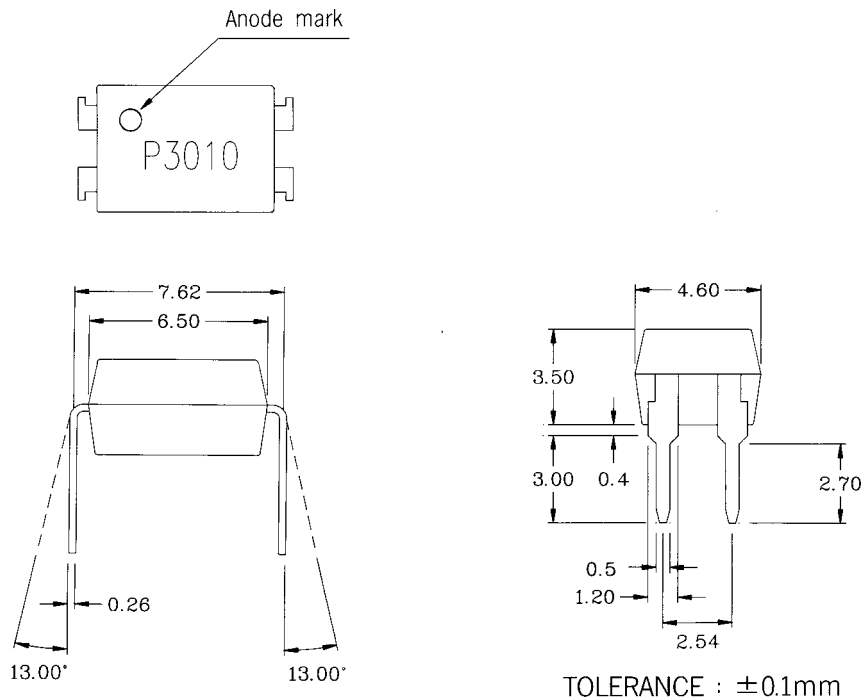

2. SCHEMATIC : TOP VIEW



- 1. Anode, Cathode
- 2. Anode, Cathode
- 3. Emitter
- 4. Collector

● Absolute Maximum Ratings

(Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	±50	mA
	Peak forward current	I _{FM}	±1	A
	Power dissipation	P _D	70	mW
Output	Collector-emitter voltage	V _{CEO}	60	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	50	mA
	Collector power dissipation	P _C	150	mW

Fig 2 Collector Power Dissipation vs. Ambient Temperature

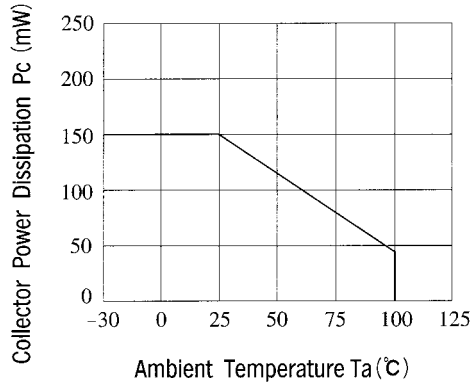


Fig 3 Collector Dark Current vs. Ambient Temperature

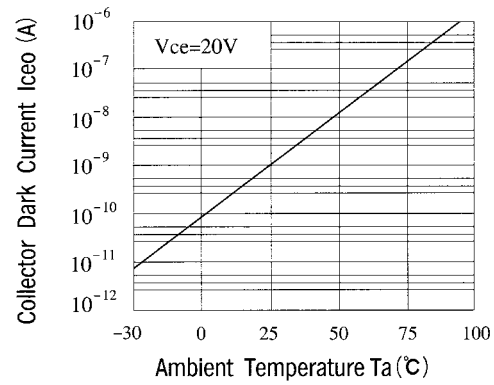


Fig 4 Forward Current vs. Ambient Temperature

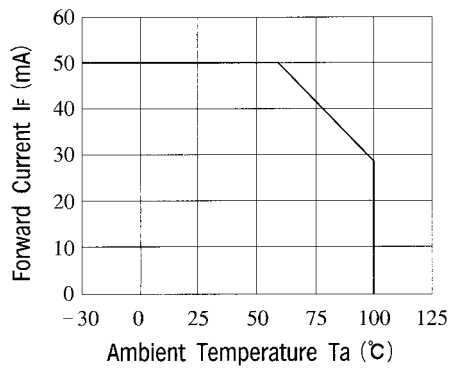


Fig 5 Forward Current vs. Forward Voltage

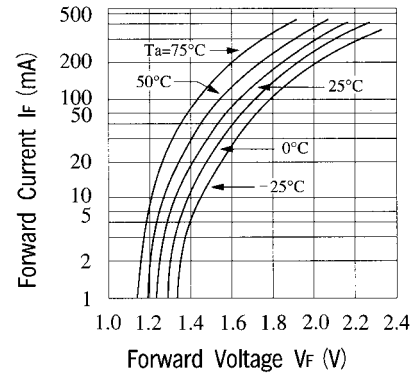


Fig 6 Collector Current vs. Collector-emitter Voltage

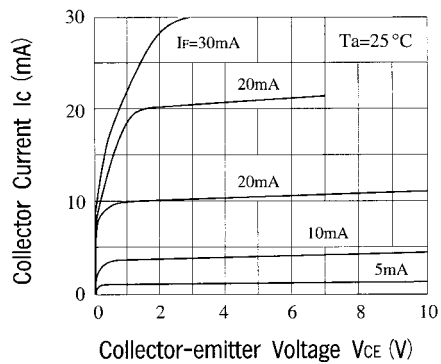


Fig 7 Relative Current Transfer Ratio vs. Ambient Temperature

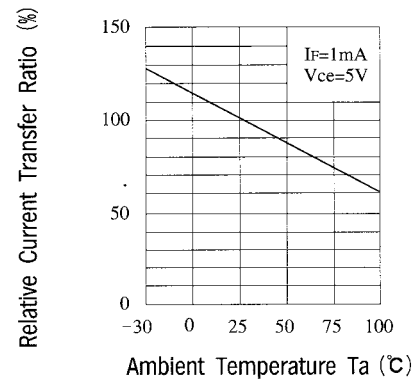


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

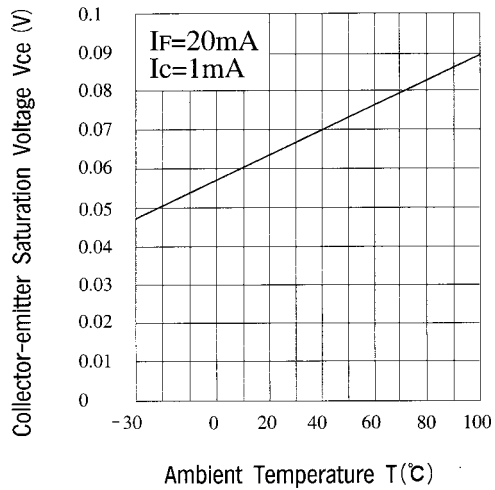


Fig. 9 Collector-emitter Saturation Voltage vs. Forward Current

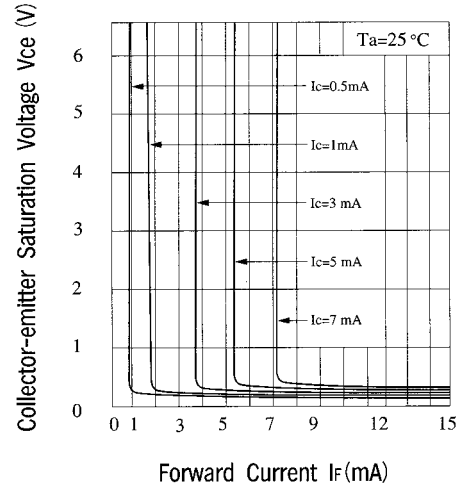


Fig. 10 Response Time vs. Load Resistance

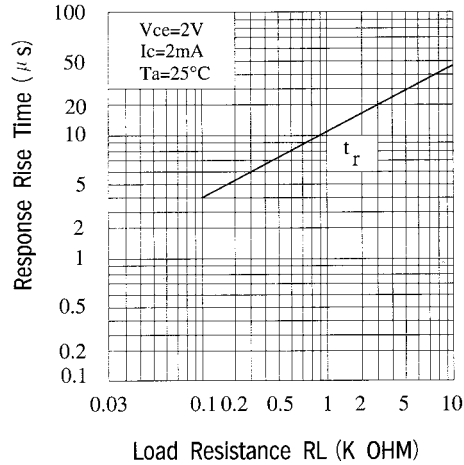


Fig. 11 Response Time vs. Load Resistance

