

PC120 Series PC121 Series

Long Creepage Distance Type Photocoupler

* Lead forming type (I type) and taping reel type (P type) are also available. (PC120I/PC120FI/PC121I/PC121FI, PC120P/PC120FP/PC121P/PC121FP) (Page 656)

* DIN-VDE0884 approved type is also available as an option.

■ Features

1. Conforms to European Safety Standards
2. Long creepage distance type
(Creepage distance : 6mm or more)
3. Internal isolation distance : 0.4mm or more
4. Compact dual-in-line package
5. High collector-emitter voltage
(V_{CEO} : 70V for PC121 series)
6. Recognized by UL file No. E64380
Approved by VDE (DIN-VDE0884 ; No. 76851)
Approved by BSI (BS415 : No. 7087,
BS7002 : No. 7409)

Approved by SEMKO (No. 9216212)

Approved by DEMKO (No. 108025)

Approved by EI (No. 155030-01)

■ Applications

1. Switching power supplies
2. OA equipment
3. TVs


■ Model Line-up

| | Standard type | | High collector-emitter voltage type | |
|--------------------|---------------|---------|-------------------------------------|---------|
| DIP type | PC120 | PC120F | PC121 | PC121F |
| Surface mount type | PC120F* | PC120F* | PC121F* | PC121F* |

*Lead forming type

(Unit : mm)

■ Outline Dimensions

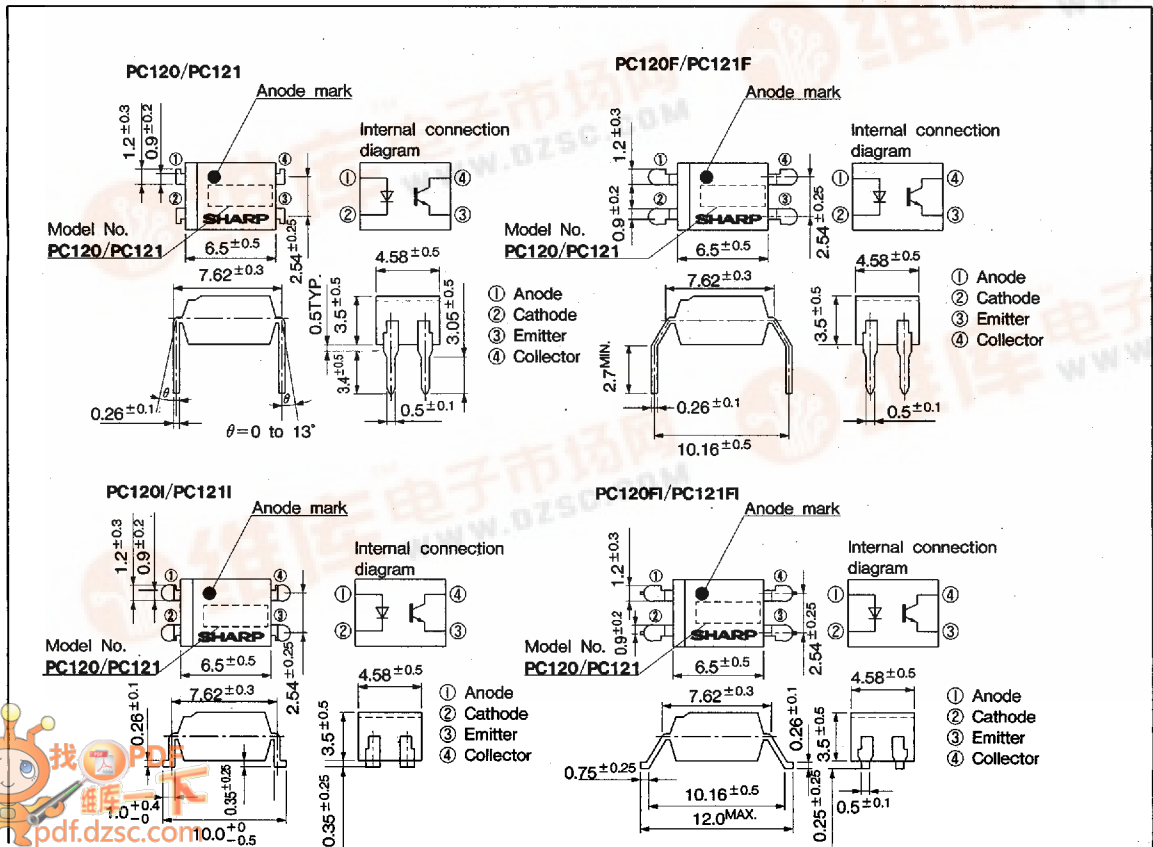

■ Absolute Maximum Ratings

(Ta=25°C)

| Parameter | Symbol | Rating | | Unit |
|--------------------------|-----------------------------|------------------|--------------|------------------|
| | | PC120 Series | PC121 Series | |
| Input | Forward current | I _F | 50 | mA |
| | *1 Peak forward current | I _{FM} | 1 | A |
| | Reverse voltage | V _R | 6 | V |
| | Power dissipation | P | 70 | mW |
| Output | Collector-emitter voltage | V _{CEO} | 35 70 | V |
| | Emitter-collector voltage | V _{ECO} | 6 | V |
| | Collector current | I _C | 50 | mA |
| | Collector power dissipation | P _C | 150 | mW |
| | Total power dissipation | P _{tot} | 200 | mW |
| | *2 Isolation voltage | V _{iso} | 5 000 | V _{rms} |
| Operating temperature | T _{opr} | -30 to +100 | °C | |
| Storage temperature | T _{stg} | -55 to +125 | °C | |
| *3 Soldering temperature | T _{sol} | 260 | °C | |

PC120 Series :

PC120/PC120I/
PC120F/PC120FI

PC121 Series :

PC121/PC121I/
PC121F/PC121FI

*1 Pulse width ≤ 100 μs, Duty ratio = 0.001

*2 40 to 60%RH, AC for 1 minute

*3 For 10 seconds

■ Electro-optical Characteristics

(Ta=25°C)

| Parameter | Symbol | Condition | MIN. | TYP. | MAX. | Unit | |
|-------------------------------------|--|--|--|----------------------|------------------|------------------|-----|
| Input | Forward voltage | V _F | I _F =20mA | — | 1.2 | 1.4 | V |
| | Reverse voltage | I _R | V _R =4V | — | — | 10 | μA |
| | Terminal capacitance | C _T | V=0, f=1kHz | — | 30 | 250 | pF |
| Output | Collector dark current | I _{CEO} | V _{CE} =20V, I _F =0 | — | — | 10 ⁻⁷ | A |
| | Collector-emitter breakdown voltage | BV _{CEO} | I _C =0.1mA, I _F =0 | 35 | — | — | V |
| | | | I _F =0 | 70 | — | — | |
| Emitter-collector breakdown voltage | BV _{ECO} | I _E =10 μA, I _F =0 | 6 | — | — | V | |
| Transfer characteristics | Current transfer ratio | CTR | I _F =5mA, V _{CE} =5V | 50 | — | 400 | % |
| | Collector-emitter saturation voltage | V _{CE(sat)} | I _F =20mA, I _C =1mA | — | 0.1 | 0.2 | V |
| | Isolation resistance | R _{ISO} | DC500V, 40 to 60%RH | 5 × 10 ¹⁰ | 10 ¹¹ | — | Ω |
| | Floating capacitance | C _f | V=0, f=1MHz | — | 0.6 | 1.0 | pF |
| | Cut-off frequency | f _c | V _{CE} =5V, I _C =2mA, R _L =100Ω -3dB point | — | 80 | — | kHz |
| Response time | Rise time | t _r | V _{CE} =2V, I _C =2mA | — | 4 | 18 | μs |
| | Fall time | t _f | R _L =100Ω | — | 3 | 18 | μs |

Fig. 1 Forward Current vs. Ambient Temperature

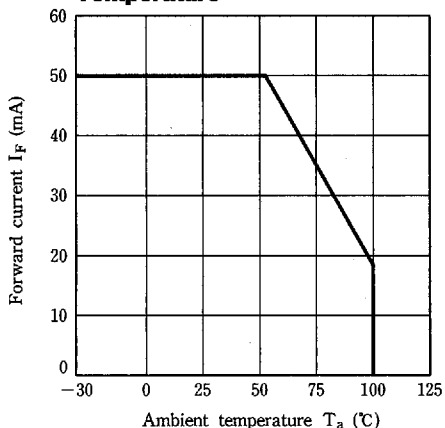


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

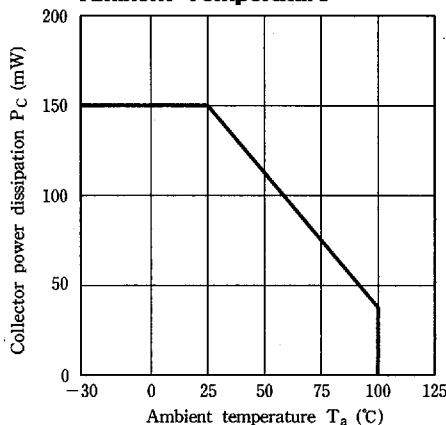


Fig. 3 Peak Forward Current vs. Duty Ratio

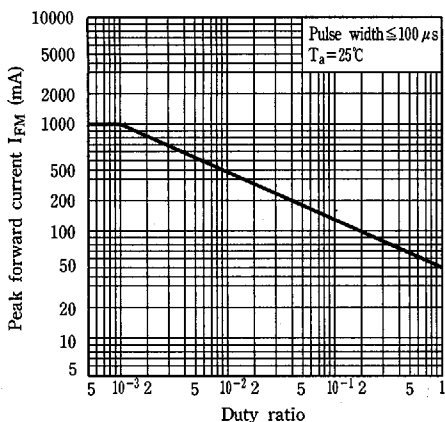


Fig. 4 Forward Current vs. Forward Voltage

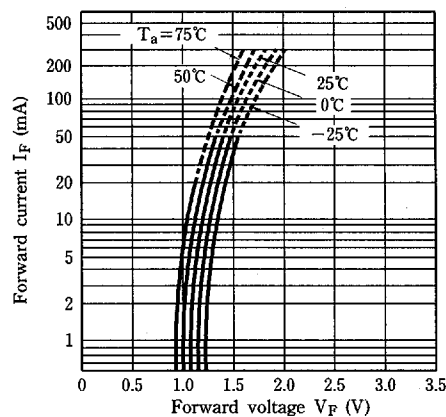


Fig. 5-a Current Transfer Ratio vs. Forward Current (PC120 Series)

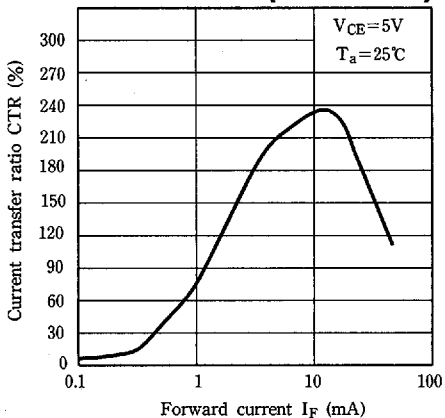


Fig. 5-b Current Transfer Ratio vs. Forward Current (PC121 Series)

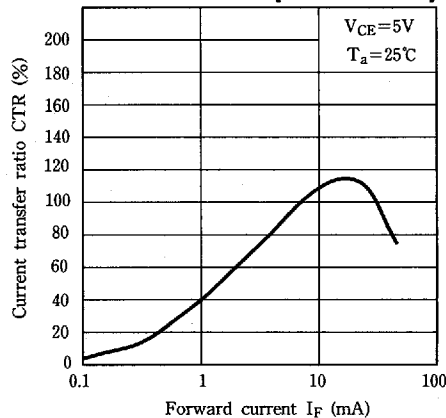


Fig. 6-a Collector Current vs. Collector-emitter Voltage (PC120 Series)

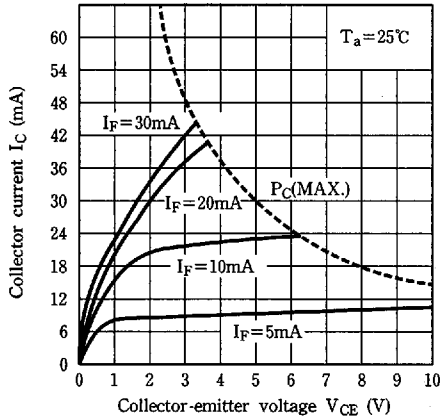


Fig. 6-b Collector Current vs. Collector-emitter Voltage (PC121 Series)

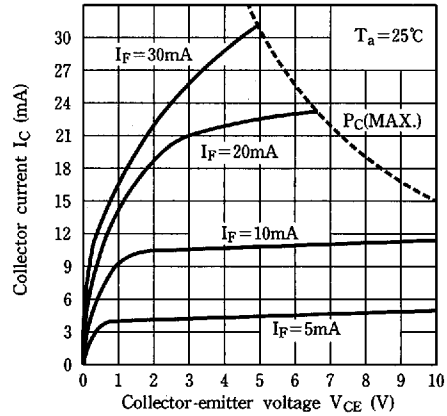


Fig. 7-a Relative Current Transfer Ratio vs. Ambient Temperature (PC120 Series)

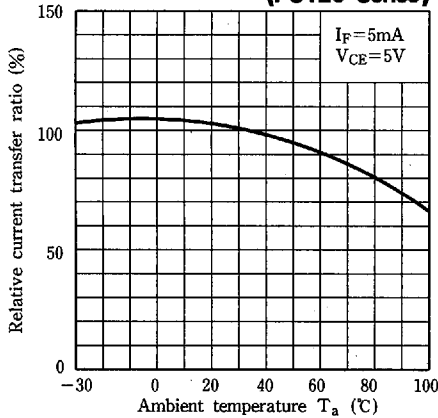


Fig. 7-b Relative Current Transfer Ratio vs. Ambient Temperature (PC121 Series)

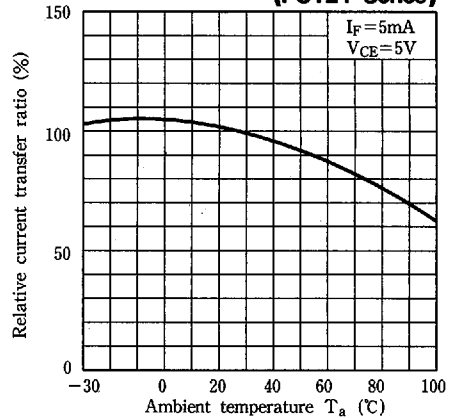


Fig. 8-a Collector-emitter Saturation Voltage vs. Ambient Temperature (PC120 Series)

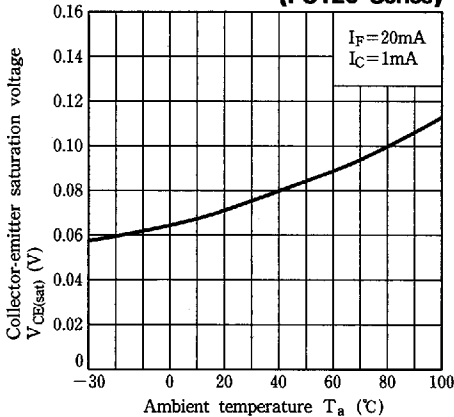


Fig. 8-b Collector-emitter Saturation Voltage vs. Ambient Temperature (PC121 Series)

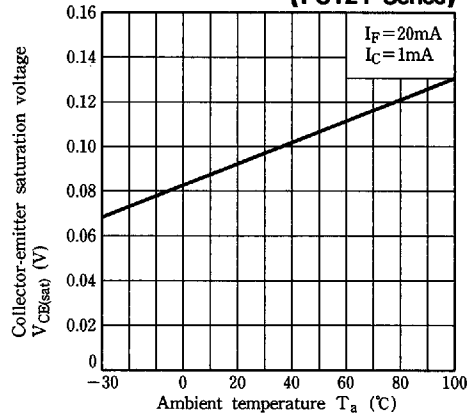


Fig. 9-a Collector Dark Current vs. Ambient Temperature (PC120 Series)

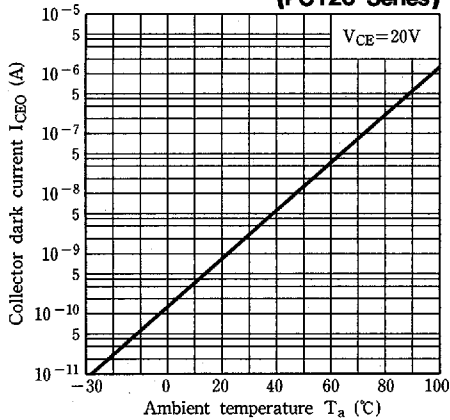


Fig. 9-b Collector Dark Current vs. Ambient Temperature (PC121 Series)

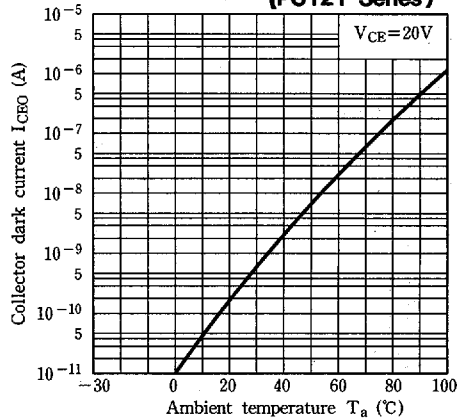


Fig.10-a Response Time vs. Load Resistance (PC120 Series)

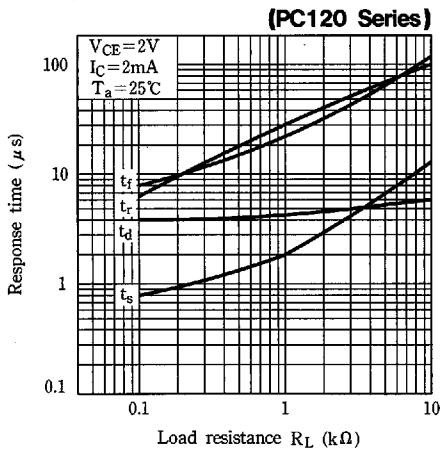


Fig.10-b Response Time vs. Load Resistance (PC121 Series)

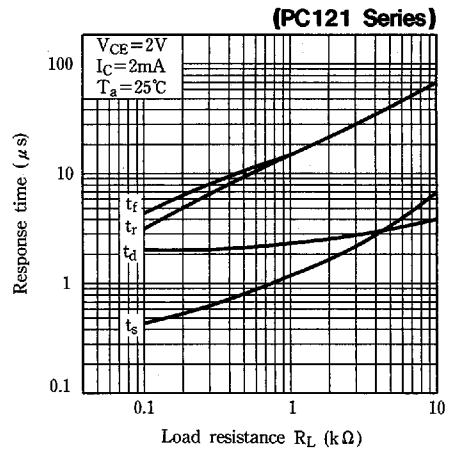


Fig.11-a Frequency Response (PC120 Series)

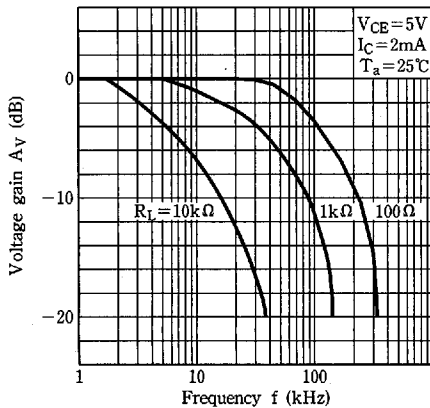


Fig. 11-b Frequency Response (PC121 Series)

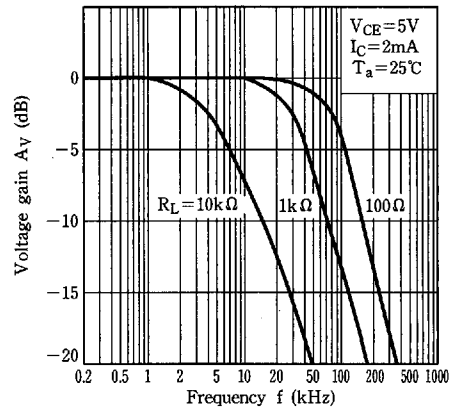


Fig.12-a Collector-emitter Saturation Voltage vs. Forward Current (PC120 Series)


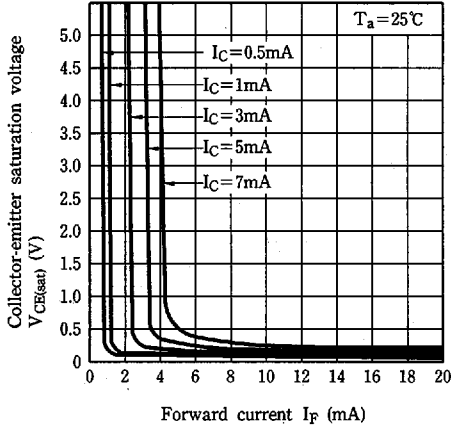


Fig.12-b Collector-emitter Saturation Voltage vs. Forward Current (PC121 Series)

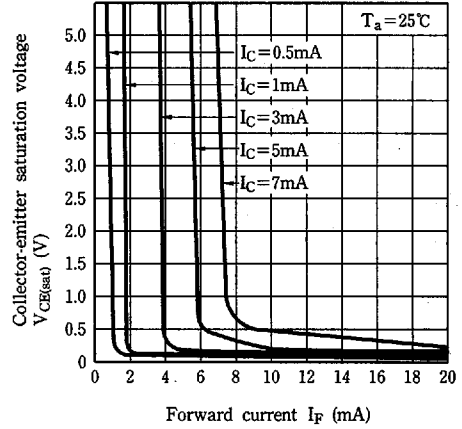

● Please refer to the chapter "Precautions for Use". (Page 78 to 93)