


DIODE MODULE 150A/800V

PD1518

OUTLINE DRAWING



FEATURES

- * 108mm Short Size Case
- * Isolated Base
- * Dual Diodes Cascaded Circuit
- * High Surge Capability

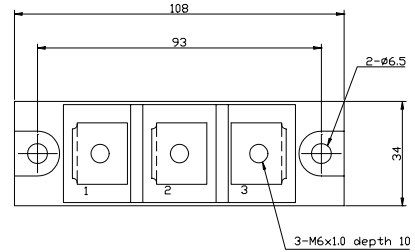

TYPICAL APPLICATIONS

- * Rectified For General Use



Maximum Ratings

Approx Net Weight:280g

Parameter	Symbol	Type / Grade	Unit
		PD1518	
Repetitive Peak Reverse Voltage *1	V_{RRM}	800	V
Non Repetitive Peak Reverse Voltage *1	V_{RSM}	900	




Parameter	Symbol	Conditions	Max Rated Value	Unit
Average Rectified Output Current *1	$I_{O(AV)}$	50 Hz Half Sine Wave condition $T_c=103^{\circ}C$	150	A
RMS Forward Current *1	$I_{F(RMS)}$		235	A
Surge Forward Current *1	I_{FSM}	50 Hz Half Sine Wave, 1cycle, Non-Repetitive	3200	A
I Squared t *1	I^2t	2msec to 10msec	51200	A ² s
Operating Junction Temperature Range	T_{jw}		-40 to +150	°C
Storage Temperature Range	T_{stg}		-40 to +125	°C
Isolation Voltage	Viso	Base Plate to Terminals, AC1min	2500	V
Mounting Torque	Case Mounting	M6 Screw	2.5 to 3.5	N.m
	Terminals	M6 Screw	2.5 to 3.5	

Electrical • Thermal Characteristics


Characteristics	Symbol	Test Conditions	Max.	Unit
Peak Reverse Current *1	I_{RM}	$V_{RM}= V_{RRM}, T_j= 150^{\circ}C$	15	mA
Peak Forward Voltage *1	V_{FM}	$I_{FM}= 450A, T_j=25^{\circ}C$	1.28	V
Thermal Resistance *1	$R_{th(j-c)}$	Junction to Case	0.25	°C/W
	$R_{th(c-f)}$	Case to Fin, Greased	0.15	

*1: Value Per 1Arm


PD1518 OUTLINE DRAWING (Dimensions in mm)

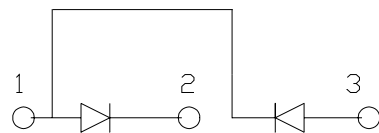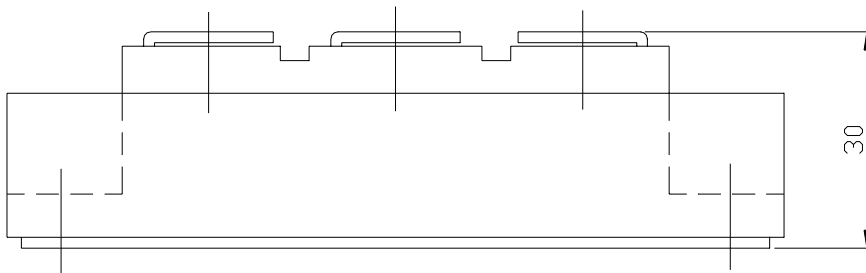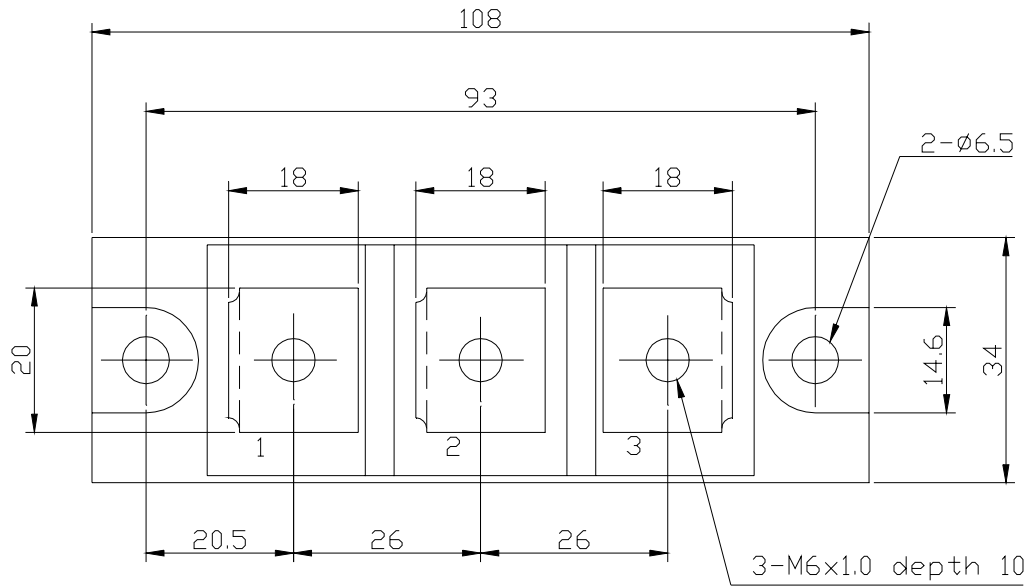


FORWARD CURRENT VS. VOLTAGE

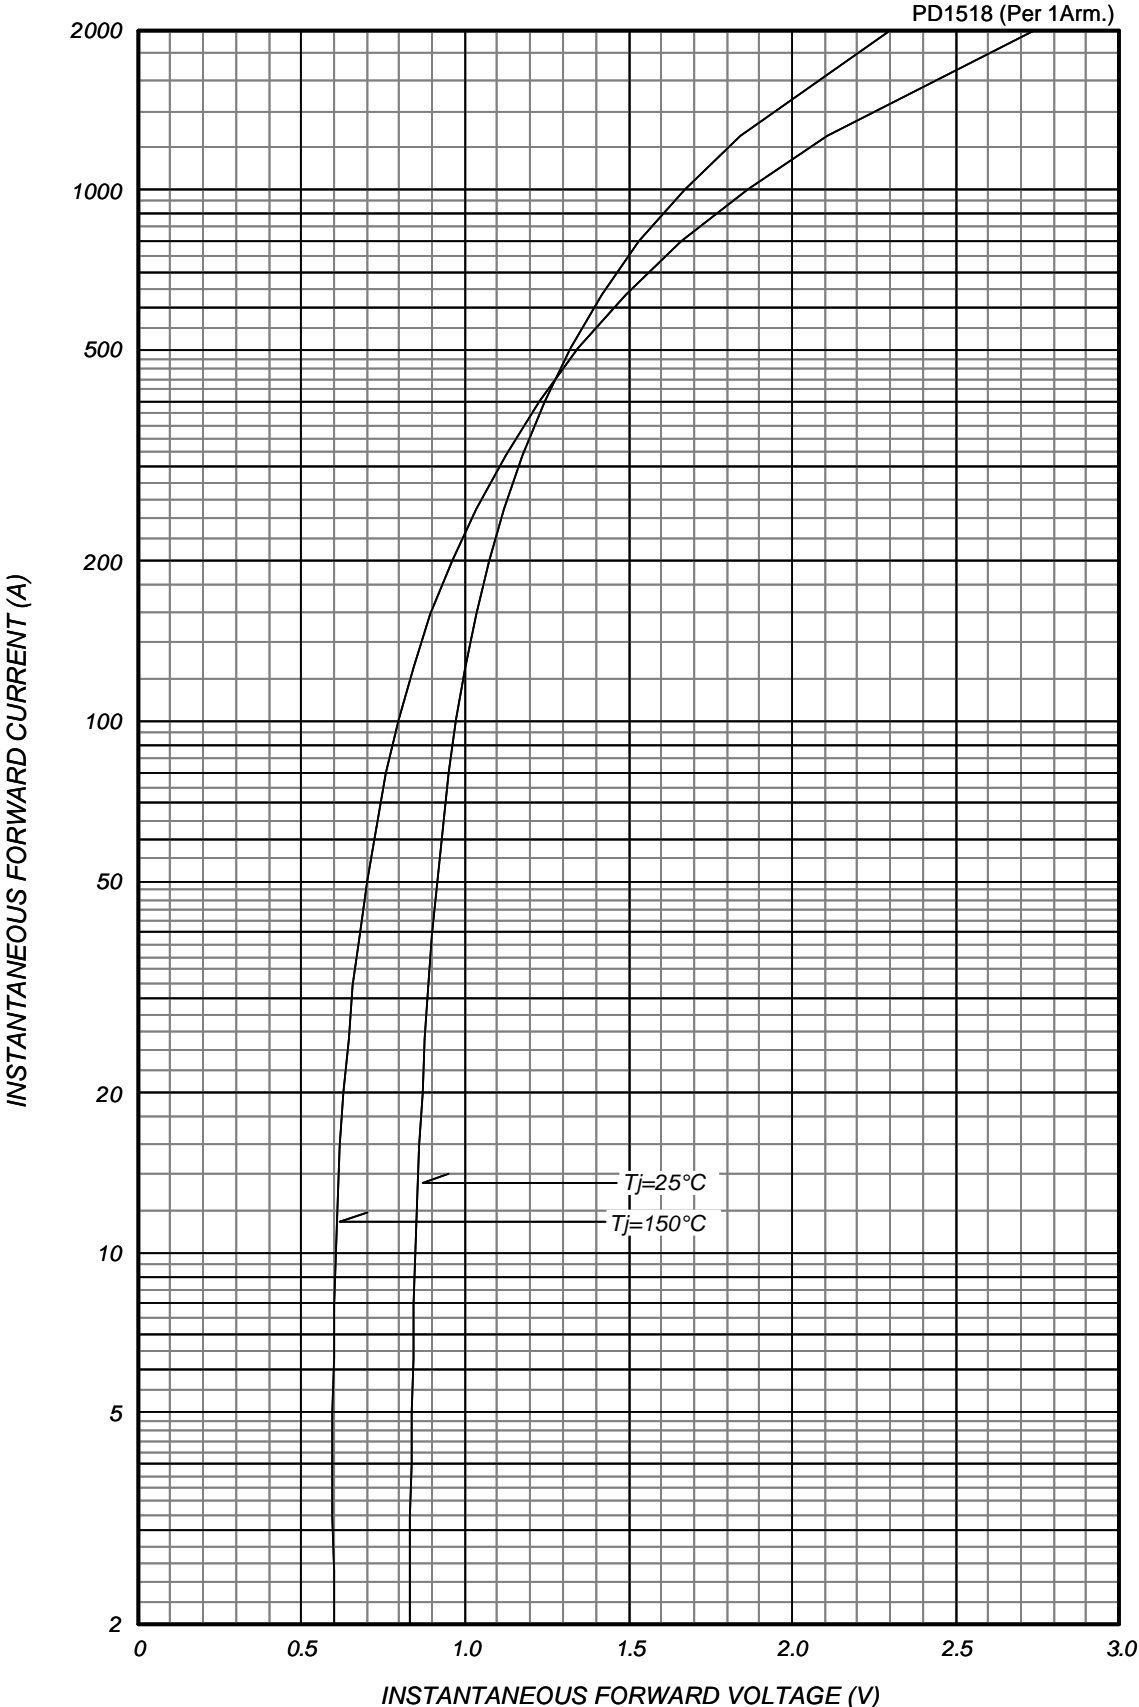

AVERAGE FORWARD POWER DISSIPATION

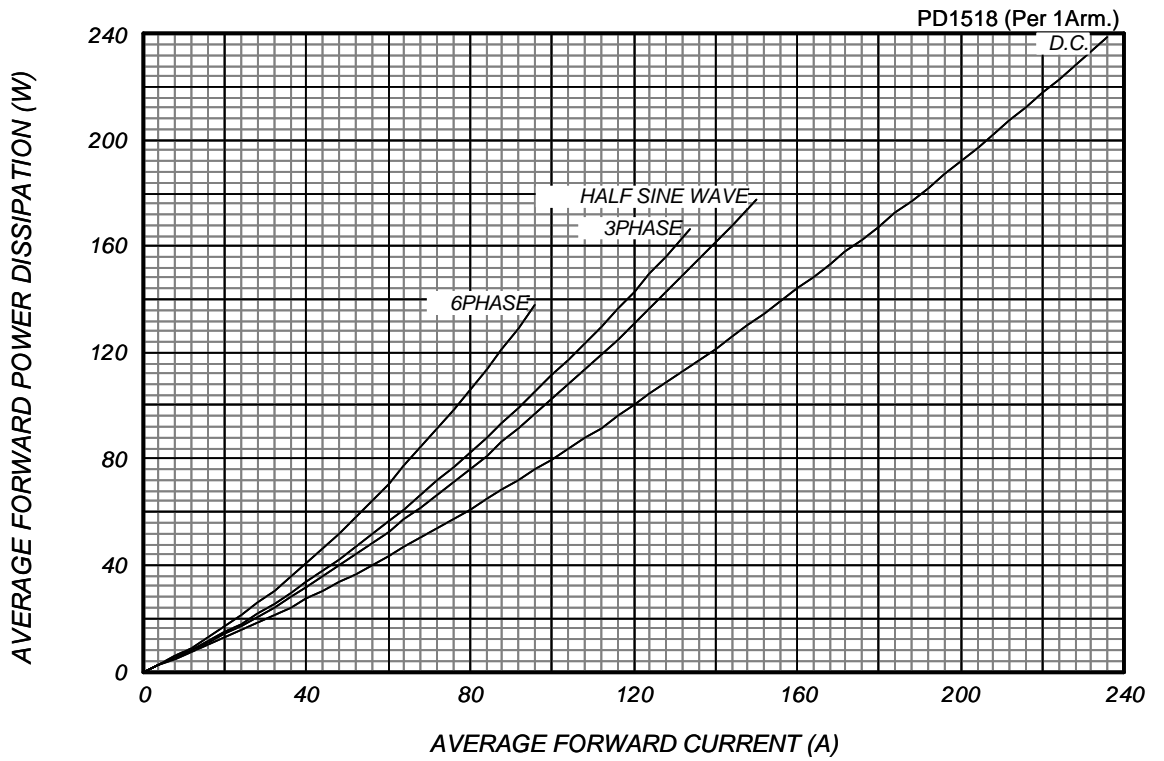


AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

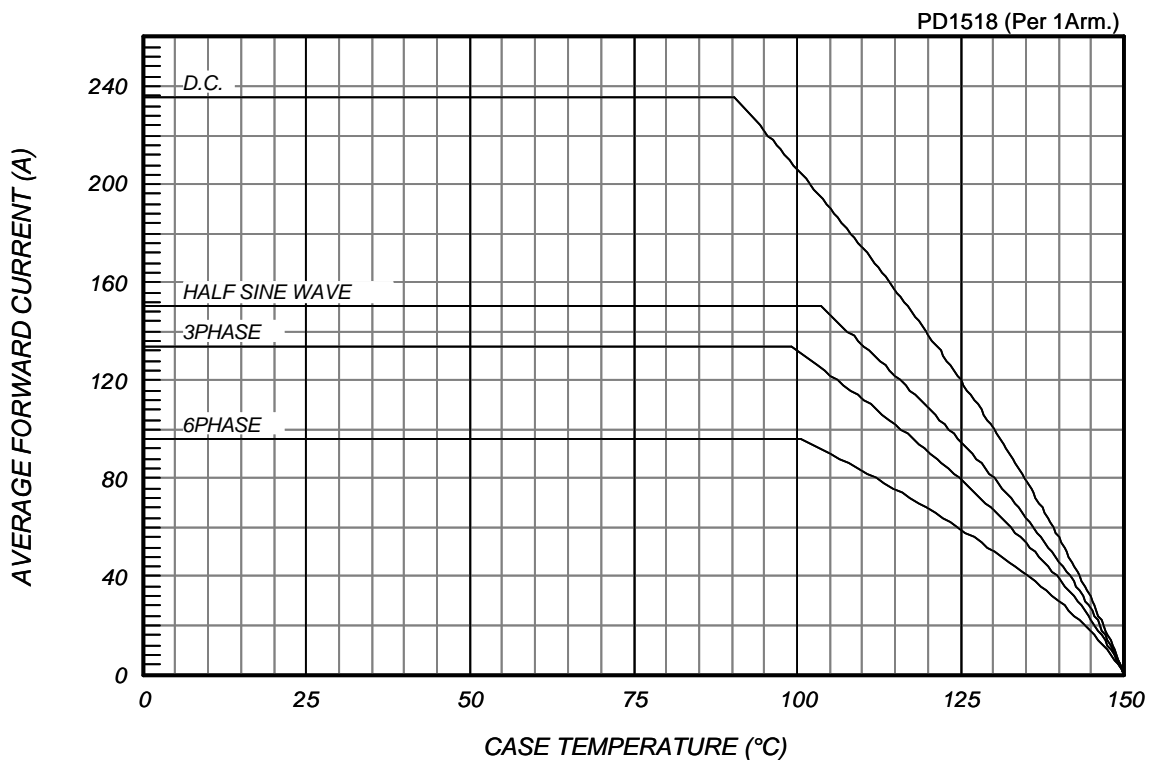

SURGE CURRENT RATINGS

f=50Hz, Half Sine Wave, Non-Repetitive, Tj=150

PD1518 (Per 1Arm.)

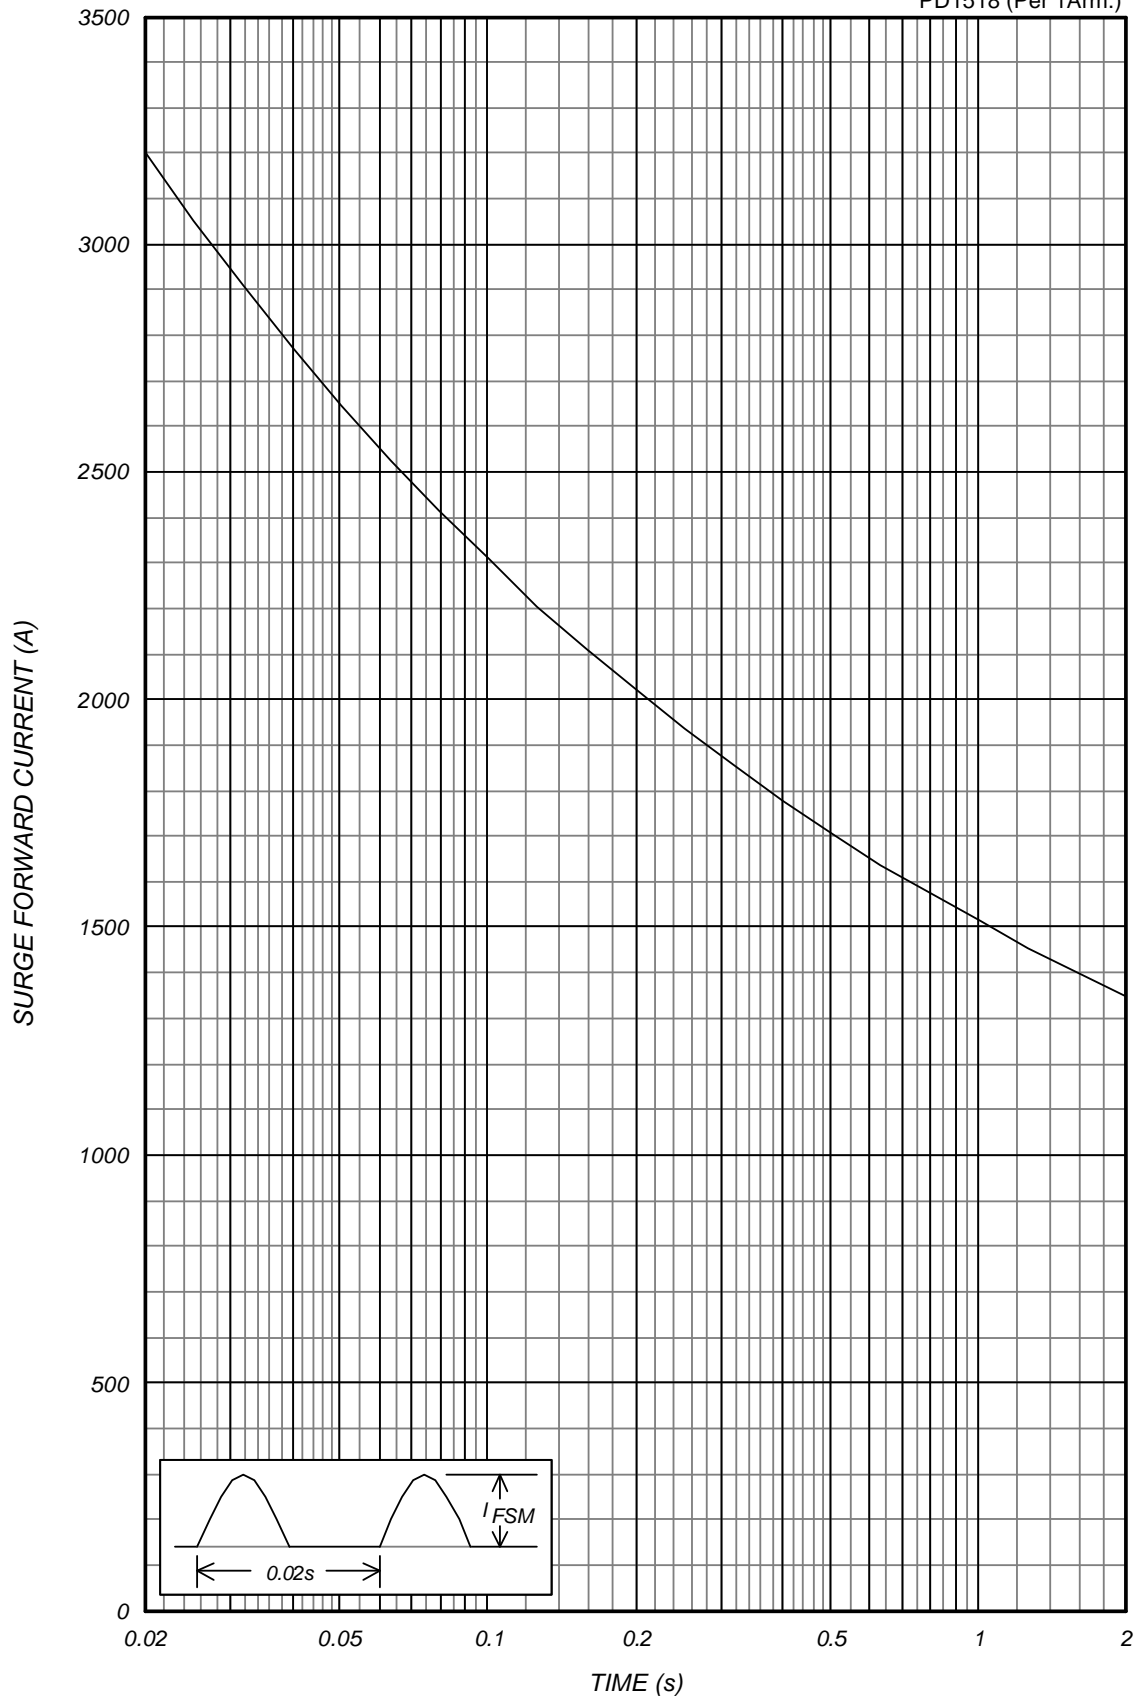

MAXIMUM TRANSIENT THERMAL IMPEDANCE

Junction to Case

