

# PE30

Vishay Sfernice



## Fully Sealed Container Cermet Potentiometers Military and Professional Grade



### FEATURES

- 3 Watt at 70°C
- High power rating
- Low temperature coefficient
- Excellent stability
- Full sealing
- Low contact resistance variation
- Mechanical strength
- Use of faston 2.86 connections

### ELECTRICAL SPECIFICATIONS

Resistive Element		cermet
Electrical Travel		270° ± 10°
Resistance Range	Linear Law	22Ω to 10MΩ
	Logarithmic Laws	100Ω to 2.2MΩ
Standard Series E3		1 - 2.2 - 4.7 and on request 1 - 2 - 5
Tolerance	Standard	± 20%
	On Request	± 10% - ± 5%
Power Rating	Linear	3 W at 70°C
	Logarithmic	1.5 W at 70°C
Temperature Coefficient		See Standard Resistance Element Data
Limiting Element Voltage (Linear Law)		300V
Contact Resistance Variation		3% Rn or 3Ω
End Resistance (Typical)		1Ω
Dielectric Strength (RMS)		2500V
Insulation Resistance (500 VDC)		10 <sup>6</sup> MΩ


### MECHANICAL SPECIFICATIONS

Mechanical Travel	300° ± 5°
Operating Torque (max. Ncm)	3 typical
End Stop Torque (max. Ncm)	70
Max. Tightening Torque Of Mounting Nut (Ncm)	250
Unit Weight (max. g)	23 to 32


### ENVIRONMENTAL SPECIFICATIONS

Temperature Range	– 55°C + 125°C
Climatic Category	55/125/56
Sealing	fully sealed container IP67

### POWER RATING CHART

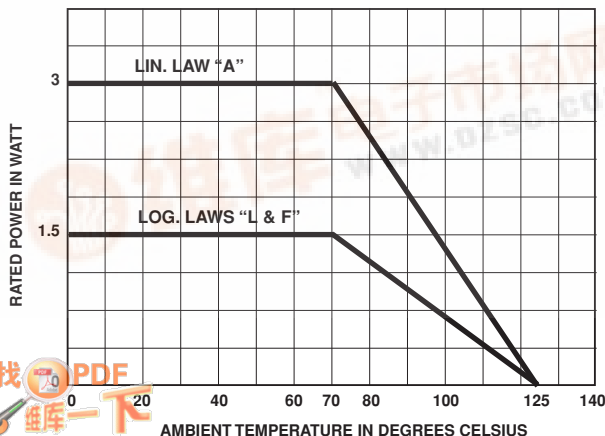

### RESISTANCE LAWS

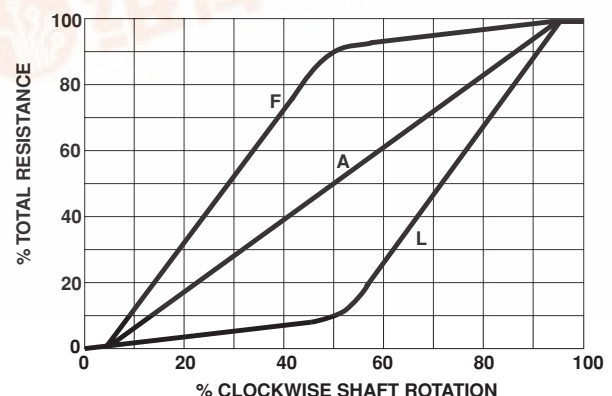





PERFORMANCE					
NF C 83-253				TYPICAL VALUES AND DRIFTS	
TESTS	CONDITIONS	$\frac{\Delta RT}{RT}(\%)$	REQUIREMENTS	$\frac{\Delta R_{1-2}}{R_{1-2}}(\%)$	$\frac{\Delta RT}{RT}(\%)$ $\frac{\Delta R_{1-2}}{R_{1-2}}(\%)$
Climatic Sequence	Phase A dry heat 125°C Phase B damp heat Phase C cold -55°C Phase D damp heat 5 cycles	± 10%		± 10%	± 0.5% ± 1%
Long Term Damp Heat	56 days	± 10%	Insulation resist. > 100MΩ		± 0.5% Insulation resist. > 10 <sup>4</sup> MΩ
Rotational Life	25000 cycles	± 10%	Contact res. variat.: < 7% Rn		± 3% Contact res. variat.: < 2% Rn
Load Life	1000 h at rated power 90°/30' - ambient temp. 70°C	± 10%	Contact res. variat.: < 7% Rn		± 1% Contact res. variat.: < 3% Rn
Rapid Temperature Change	5 cycles - 55°C to + 125°C	± 3%			± 0.5%
Shock	50 g 11 ms 3 successive shocks in 3 directions	± 2%			± 0.1% ± 0.2 %
Vibration	10 - 55 Hz 0.75mm or 10 g during 6 hours	± 2%			± 0.1% ± 0.2 %

STANDARD RESISTANCE ELEMENT DATA							
STANDARD RESIS- TANCE VALUES	LINEAR LAW			LOG LAWS			T.C. -55°C +125°C
	MAX. POWER AT +70°C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH ELEMENT	MAX. POWER AT +70°C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH ELEMENT	
Ω	W	V	mA	W	V	mA	ppm/°C
22	3	8.12	369				200
47	3	11.87	252				
100	3	17.32	173				±100
220	3	25.69	116				
470	3	37.55	79				
1k	3	54.77	54	1.5	38.7	38.7	
2.2k	3	81.24	37	1.5	57.4	26.1	
4.7k	3	118.74	25	1.5	83.9	17.9	
10k	3	173.20	17	1.5	122	12.2	
22k	3	256.9	11	1.5	181.6	8.25	
47k	1.91	300	6.3	1.5	265	5.64	
100k	0.90	300	3	0.9	300	3	
220k	0.41	300	1.36	0.41	300	1.36	
470k	0.19	300	0.63	0.19	300	0.63	
1M	0.09	300	0.30	0.09	300	0.30	
2.2M	0.04	300	0.13				
4.7M	0.02	300	0.06				
10M	0.01	300	0.03				

## MARKING

VISHAY trademark, series, NF types if applicable, ohmic value (in Ω, kΩ, MΩ), tolerance (in %), manufacturing date, marking of terminals 1, 2, 3 or a, b, c.

## ORDERING INFORMATION

PE30	P	AC	200 kΩ	± 20%	A	BO10
SERIES	FEATURE	SHAFT LENGTH	OHMIC VALUE	TOLERANCE	LAW	PACKAGING
<b>P</b>	Panel sealing*	<b>AC</b> 16 ± 0.5mm slotted		± 20% standard	<b>A</b> linear	
<b>LPRP</b>	Locating peg	<b>AM</b> 25 ± 0.5mm slotted		± 10% on request	<b>L</b> clockwise logarithmic	
<b>DBAN</b>	Shaft locking	<b>AL</b> 50 ± 0.5mm plain round			<b>F</b> inverse clockwise logarithmic	

\* PE Panel sealing with locating peg (former designation E108)