

PG124S15 (10A)

(1500V / 10A)

Fast recovery diode

Features

- Damper diode for high definition TV and high resolution display
- Insulated package by fully molding
- High voltage by mesa design
- High reliability

Applications

- High speed switching

Maximum ratings and characteristics


- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		1500	V
Non-Repetitive peak reverse voltage	V_{RSM}		1500	V
Isolating voltage	V_{iso}	Terminals-to-Case, AC.1min	1500	V
Average output current	I_o	Square wave, duty=1/2 $T_c=95^\circ C$	10	A
Non-repetitive surge current	I_{FSM}	Sine wave 10ms, 1shot	100	A
Operating junction temperature	T_j		+150	$^\circ C$
Storage temperature	T_{stg}		-40 to +150	$^\circ C$


- Electrical characteristics ($T_c=25^\circ C$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_F	$I_F=4A$	2.0	V
Reverse current	I_R	$V_R=V_{RRM}$	50.0	μA
Reverse recovery time	t_{rr}	$I_F=I_R=0.1A, I_{rec}=0.025A$	0.5	μs

Outline drawings, mm

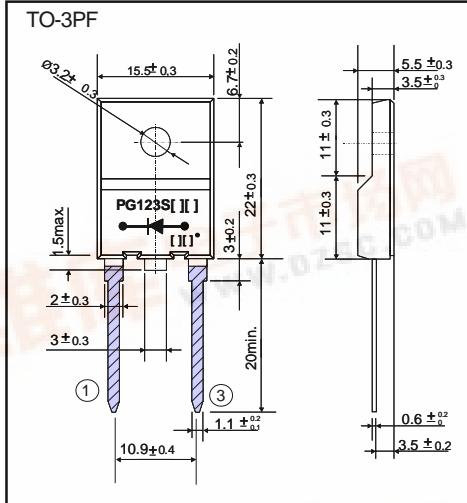


Connection diagram

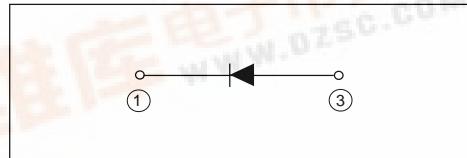


Item	Symbol	Condition	Max.	Unit

■ Characteristics


Forward Characteristic (typ.)

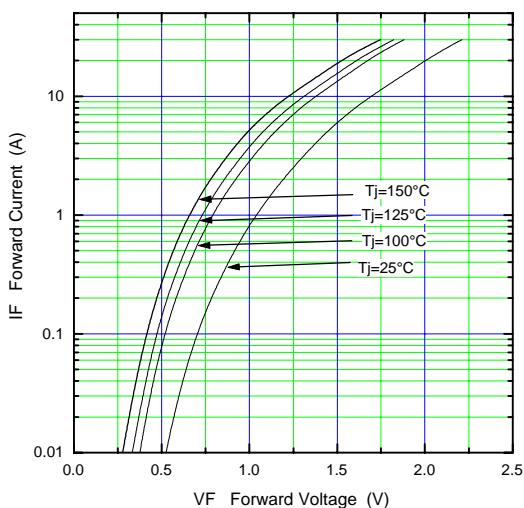


Reverse Characteristic (typ.)

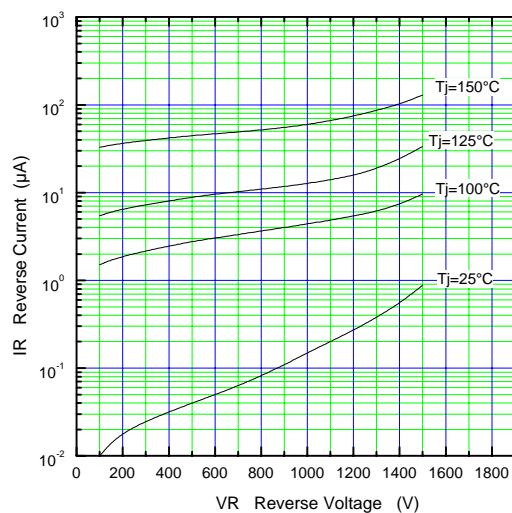


Forward Power Dissipation

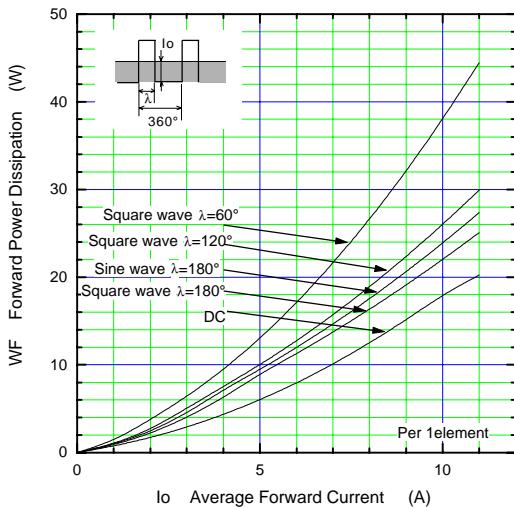


Reverse Power Dissipation

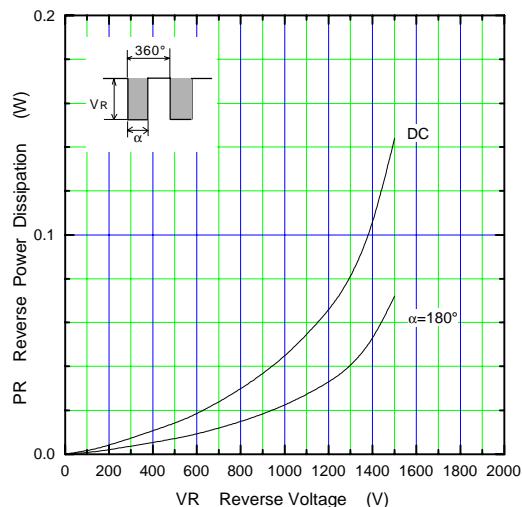

Current Derating (Io-T_c)

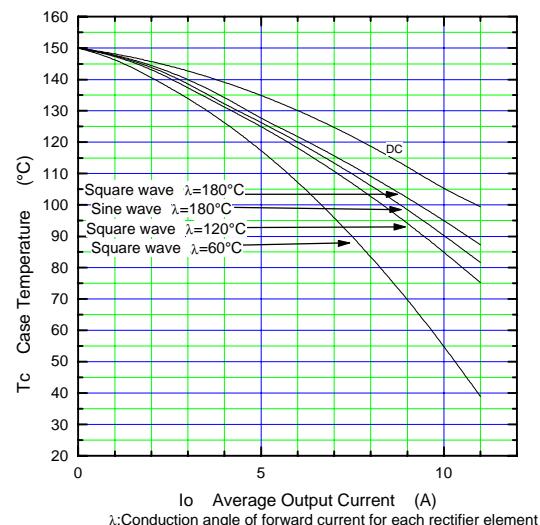

Junction Capacitance Characteristic (typ.)

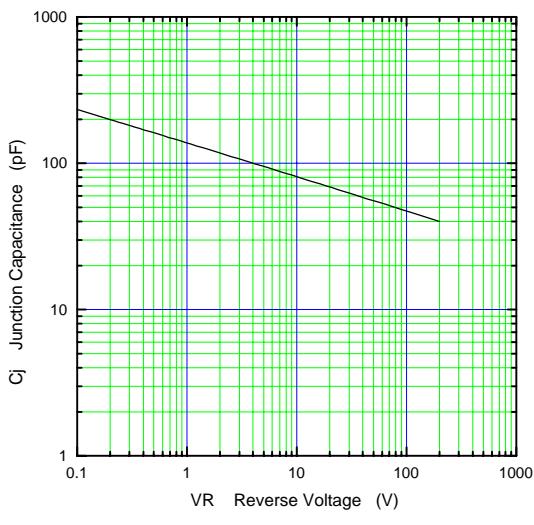

(1500V / 10A)

PG124S15 (10A)

