



Littelfuse

[查询PGB0010603NR供应商](#)

[捷多邦，专业PCB打样工厂，24小时加急出货](#)

PulseGuard® Suppressors

Polymeric ESD Suppressors

PGB Series 0603 Surface Mount ESD Suppressor

Product Overview

PulseGuard ESD Suppressors help protect sensitive electronic equipment against electrostatic discharge (ESD). They supplement the on-chip protection of integrated circuitry and are best suited for low-voltage, high-speed applications where low capacitance is important. Data ports utilizing such high-speed protocols as USB 2.0, IEEE1394 and InfiniBandSM can benefit from this new technology.

PulseGuard suppressors use polymer composite materials to suppress fast-rising ESD transients (as specified in IEC 61000-4-2 and MIL-STD-883C).

Features

- Ultra-low capacitance
- Low leakage current
- Fast response time
- Single line of protection
- Bi-directional
- Withstands multiple ESD strikes
- Standard EIA SOCM-1608 package
- Compatible with pick-and-place processes
- Available in 1,000 and 5,000 piece reels (EIA-RS481)

Typical Applications


- Servers
- Laptop/Desktop Computers
- Network Hardware
- Computer Peripherals
- Digital Cameras
- External Storage

Electrical Characteristics

Trigger Voltage¹1,000V, typical
Clamping Voltage¹150V, typical
Rated Voltage24VDC, max
Capacitance²0.055 pF
Response Time¹< 1 ns
Leakage Current³< 1 nA
ESD Pulse Withstand1,000 pulses, minimum

NOTES:

1. 8 kV direct discharge method, per IEC 61000-4-2.
2. Measured at 1 MHz.
3. Measured at 6 VDC. Testing at fast ESD pulse rates (1-20Hz) may cause a change in leakage current performance (6µA, max).

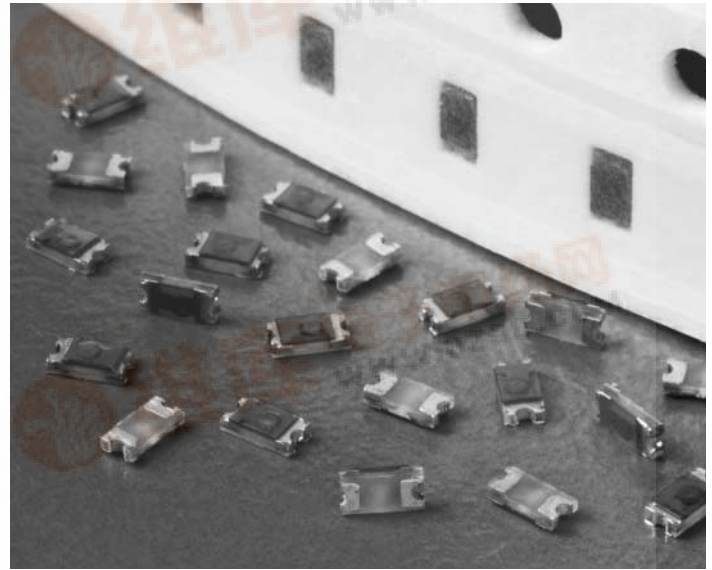

Physical Specifications

Materials:

Body: Glass Epoxy

Terminations: Tin-Lead

Soldering Parameters:

Wave solder -- 260°C, 10 seconds maximum

Reflow solder -- 260°C, 30 seconds maximum

Operating Temperature Range:

-65°C to 125°C

Ordering Information

CATALOG NUMBER	PIECES PER REEL
PGB0010603MR	1,000
PGB0010603NR	5,000


Design Consideration

Because of the fast rise-time of the ESD transient, placement of PulseGuard suppressors is a key design consideration. To achieve optimal ESD suppression, the devices should be placed on the circuit board as close to the source of the ESD transient as possible. Install PulseGuard suppressors directly behind the connector so that they are the first board-level circuit component encountered by the ESD transient. They are connected from signal/data line to ground.




PGB Series 0603 Surface Mount ESD Suppressor

Generalized PulseGuard Suppressor Response to ESD (Positive and Negative Polarity ESD Pulses)

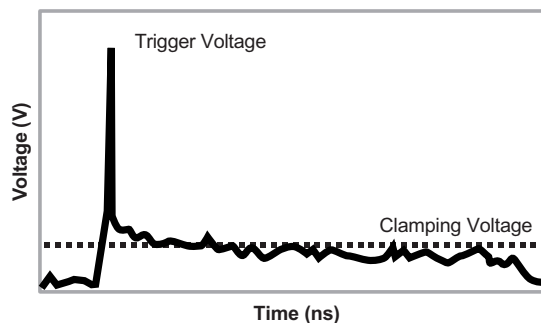

Generalized I-V Curve (Positive and Negative Polarity ESD Pulses)

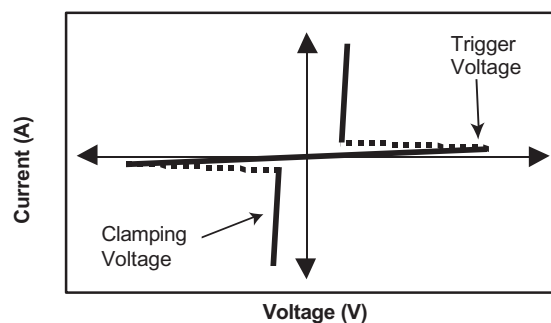

Definitions


Trigger Voltage: The measured peak voltage across the ESD suppressor before it transitions from high to low resistance. It is manifested as a “spike” before the clamping voltage is achieved. This voltage is typically well below the damage threshold of on-chip IC protection.

Clamping Voltage: The voltage level to which the ESD impulse voltage is reduced. This is the voltage that the suppressor holds at, until the ESD transient energy is dissipated.

ESD Impulse Voltage: Also known as the ESD Threat Voltage. This is the voltage that is “zapped” into the circuit. Voltages generated by people can exceed 15 kV. The IEC 61000-4-2 defines four levels of impulse voltage for testing purposes:


SEVERITY LEVEL	AIR DISCHARGE	DIRECT DISCHARGE
1	2 kV	2 kV
2	4 kV	4 kV
3	8 kV	6 kV
4	15 kV	8 kV

Capacitance vs. Frequency

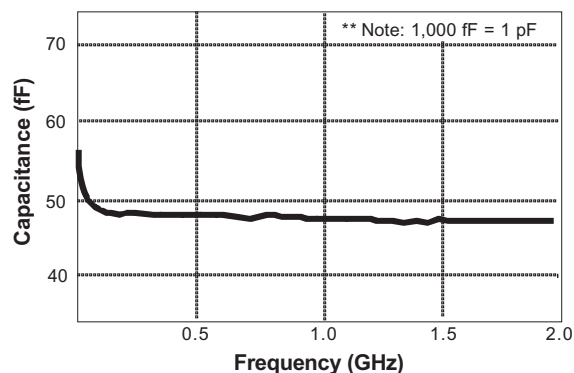

Carrier Tape Specifications


Parts are delivered on 7" (178mm) reel, paper carrier tape

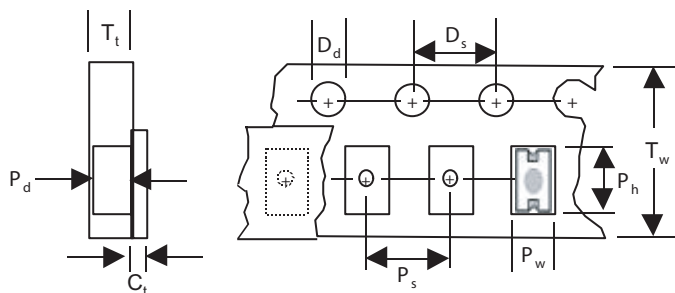

DESCRIPTION	MEASUREMENT (MM)
C _t - Cover tape thickness	0.06
D _d - Drive hole diameter	1.50
D _s - Drive hole spacing	4.00
P _d - Pocket depth	0.58
P _h - Pocket height	1.85
P _s - Pocket spacing	4.00
P _w - Pocket width	1.02
T _t - Carrier tape thickness	0.65
T _w - Carrier tape width	8.00


PGB Series 0603 Surface Mount ESD Suppressor

Test Set-up for IEC 61000-4-2 Waveform, 2kV-15kV

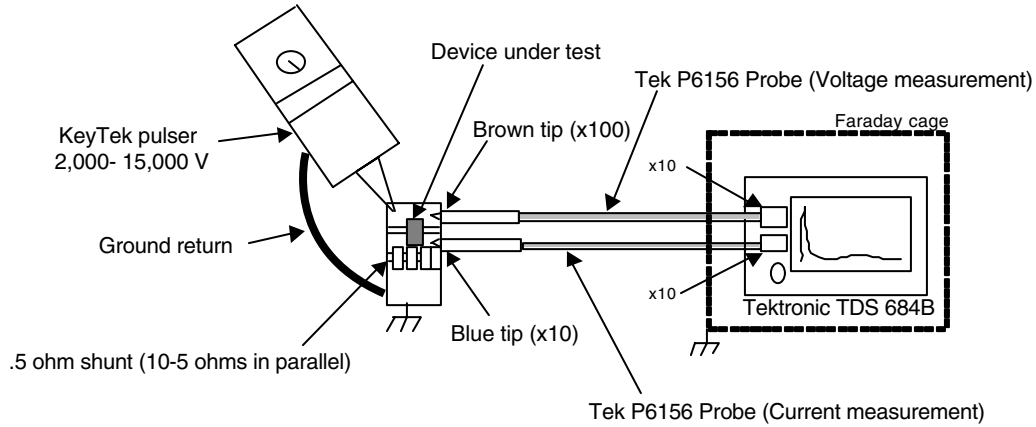


Reference Schematics:

Recommended Pad Layout:




Device Dimensions:



*Dimension 'a' is: 0.457 (.018")

*Dimension 'b' is: 0.381 (.015")

Equivalent Circuit:



	A		B		C		D	
SOLDER METHOD	INCH	MM	INCH	MM	INCH	MM	INCH	MM
Wave Solder	0.050	1.27	0.030	.762	0.130	3.30	0.030	.762
Reflow Solder	0.050	1.27	0.020	.508	0.120	3.05	0.030	.762

NOTE: PulseGuard suppressors are bi-directional; they can be installed regardless of the orientation of their terminals. They have no inherent polarity.