

Wireless Power Transistor, 33W 1805 - 1880 MHz

PH1819-33


V2.01

Features

- NPN Silicon Microwave Power Transistor
- Common Emitter Class AB Operation
- Internal Input and Output Impedance Matching
- Diffused Emitter Ballasting
- Gold Metallization System

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CE0}	25	V
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current	I_C	4.7	A
Power Dissipation	P_D	91	W
Storage Temperature	T_{STG}	-55 to +150	°C
Junction Temperature	T_J	200	°C
Thermal Resistance	θ_{JC}	3.0	°C/W

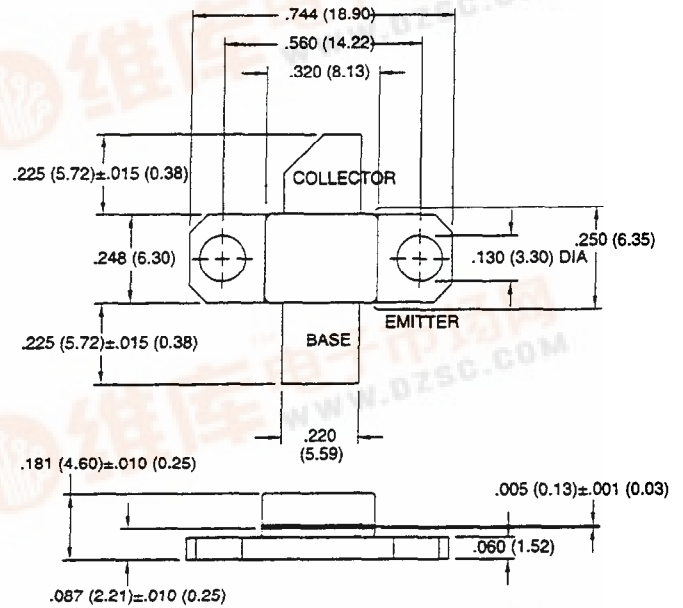


UNLESS OTHERWISE NOTED, TOLERANCES ARE
INCHES $\pm .005$ " (MILLIMETERS ± 0.13 MM)

Electrical Characteristics at 25°C


Parameter	Symbol	Min	Max	Units	Test Conditions
Power Gain	G_p	7.0	-	dB	$V_{CC}=25$ V, $I_{CO}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz
Collector Efficiency	η_c	40	-	%	$V_{CC}=25$ V, $I_{CO}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz
Input Return Loss	RL	10	-	dB	$V_{CC}=25$ V, $I_{CO}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz
Load Mismatch Tolerance	VSWR-T	-	2:1	-	$V_{CC}=25$ V, $I_{CO}=200$ mA, $P_{OUT}=33$ W, $F=1805, 1880$ MHz

Broadband Test Fixture Impedances


F (GHz)	$Z_{IF}(\Omega)$	$Z_{OF}(\Omega)$
1805	1.8 - j5.5	4.0 - j1.4
1850	1.6 - j5.1	3.9 - j1.4
1880	1.7 - j4.8	4.0 - j0.9

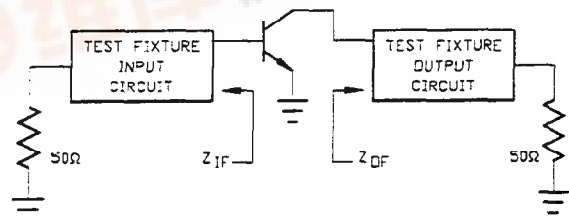

RF Test Fixture

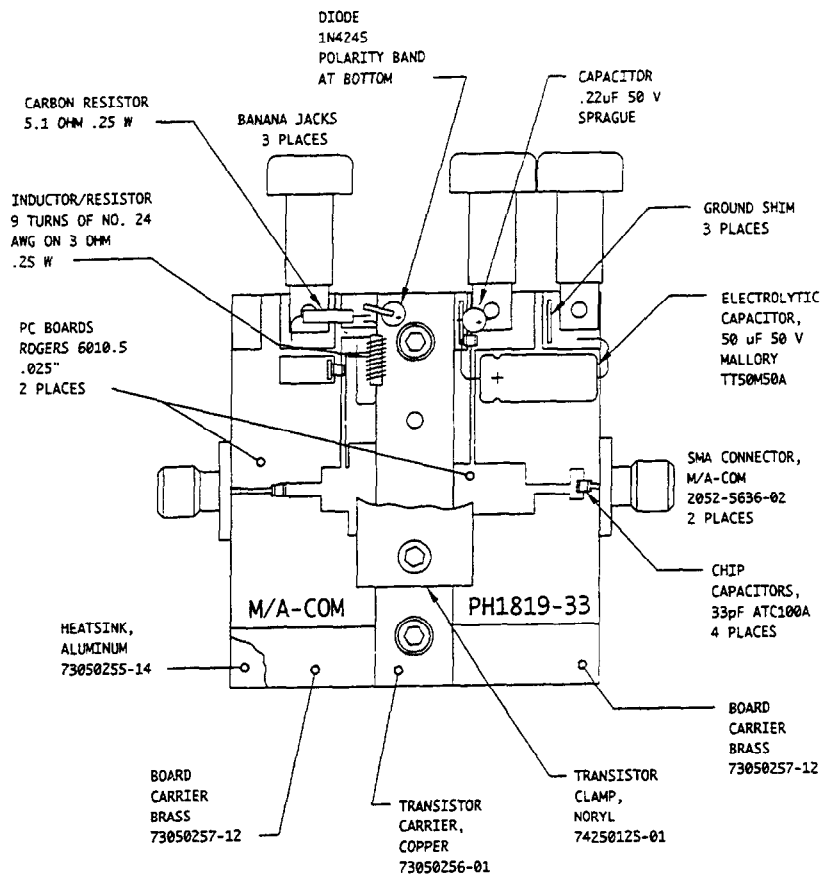

Test Fixture PC Board Dimensions

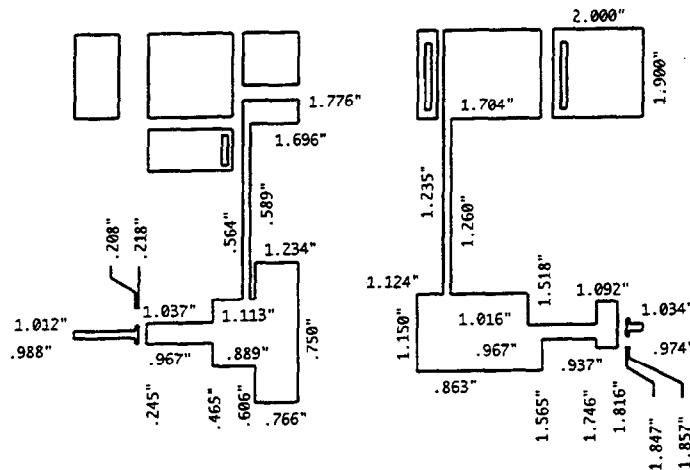

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020