



Radar Pulsed Power Transistor, 5W, 100μs Pulse, 10% Duty 2.7 - 3.1 GHz PH2731-5M


V2.00

Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	0.7	A
Total Power Dissipation	P_{TOT}	50	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-65 to +200	°C

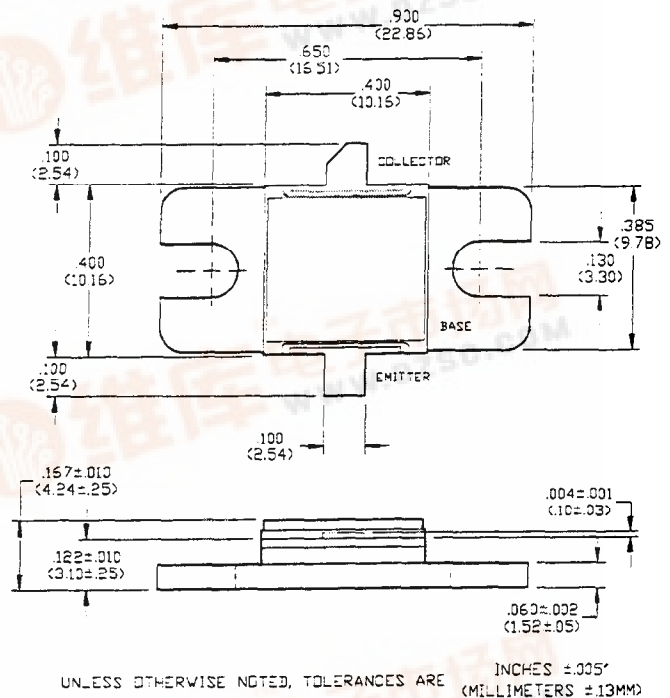


Electrical Characteristics at 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	BV_{CES}	65	-	V	$I_C=10$ mA
Collector-Emitter Leakage Current	I_{CES}	-	1.0	mA	$V_{CE}=40$ V
Thermal Resistance	$R_{TH(JC)}$	-	3.5	°C/W	$V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.7, 2.9, 3.1$ GHz
Output Power	P_{OUT}	5.0	-	W	$V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.7, 2.9, 3.1$ GHz
Power Gain	G_P	7.0	-	dB	$V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.7, 2.9, 3.1$ GHz
Collector Efficiency	η_c	30	-	%	$V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.7, 2.9, 3.1$ GHz
Input Return Loss	RL	6	-	dB	$V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.7, 2.9, 3.1$ GHz
Load Mismatch Tolerance	VSWR-T	-	3:1	-	$V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.7, 2.9, 3.1$ GHz
Load Mismatch Stability	VSWR-S	-	1.5:1	-	$V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.7, 2.9, 3.1$ GHz


Broadband Test Fixture Impedances

F(GHz)	$Z_{IF}(\Omega)$	$Z_{OF}(\Omega)$
2.70	40 - j12	25 + j3.5
2.90	35 - j16	16 + j2.4
3.10	30 - j18	12 + j4.0

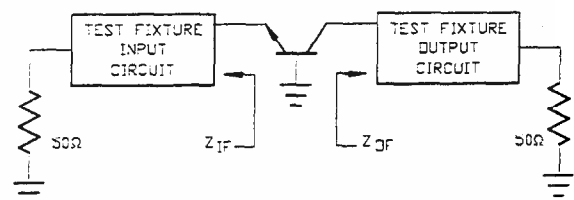


Specifications Subject to Change Without Notice.

RF Test Fixture

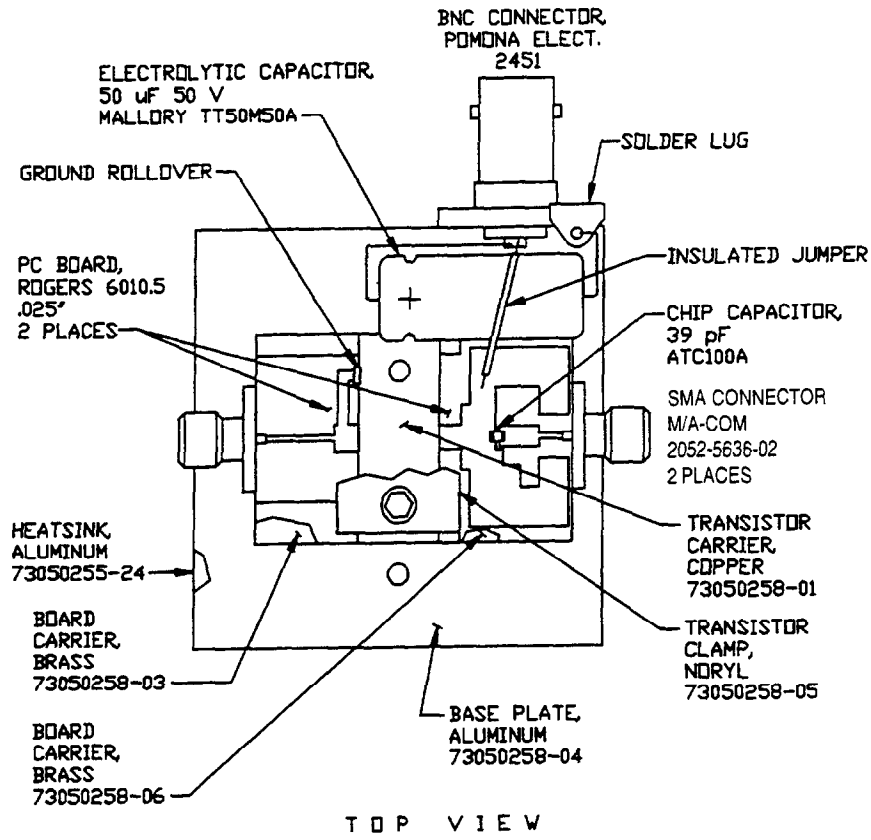

Test Fixture PC Board Dimensions

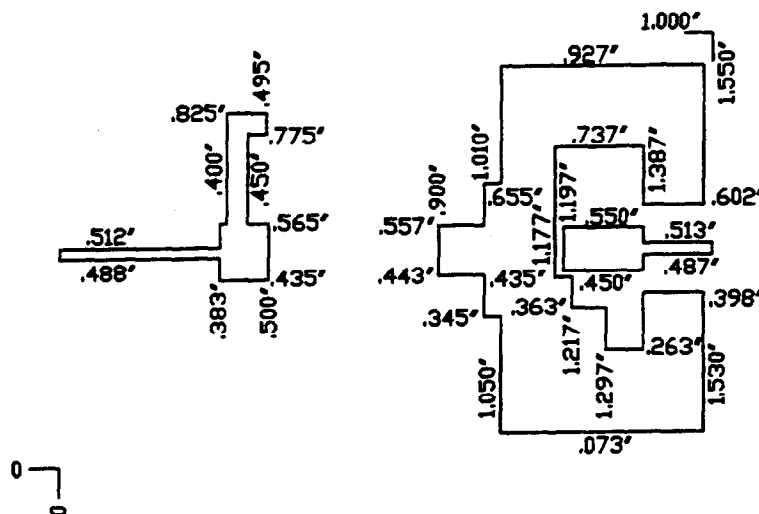

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020