

Radar Pulsed Power Transistor, 5W, 100 μ s Pulse, 10% Duty 2.9 - 3.1 GHz PH2931-5M


V2.00

Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

Absolute Maximum Ratings at 25°C

| Parameter | Symbol | Rating | Units |
|---------------------------|-----------|-------------|-------|
| Collector-Emitter Voltage | V_{CES} | 65 | V |
| Emitter-Base Voltage | V_{EBO} | 3.0 | V |
| Collector Current (Peak) | I_C | 0.7 | A |
| Total Power Dissipation | P_{TOT} | 55 | W |
| Junction Temperature | T_J | 200 | °C |
| Storage Temperature | T_{STG} | -65 to +200 | °C |

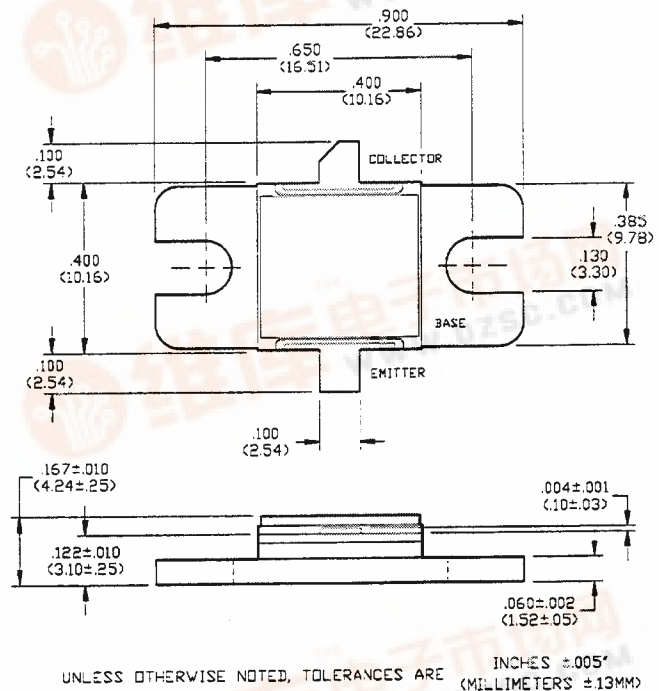


Electrical Characteristics at 25°C


| Parameter | Symbol | Min | Max | Units | Test Conditions |
|-------------------------------------|--------------|-----|-------|-------|--|
| Collector-Emitter Breakdown Voltage | BV_{CES} | 65 | - | V | $I_C=10$ mA |
| Collector-Emitter Leakage Current | I_{CES} | - | 1.0 | mA | $V_{CE}=40$ V |
| Thermal Resistance | $R_{TH(JC)}$ | - | 3.5 | °C/W | $V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.9, 3.0, 3.1$ GHz |
| Output Power | P_{OUT} | 5.0 | - | W | $V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.9, 3.0, 3.1$ GHz |
| Power Gain | G_P | 7.0 | - | dB | $V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.9, 3.0, 3.1$ GHz |
| Collector Efficiency | η_C | 30 | - | % | $V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.9, 3.0, 3.1$ GHz |
| Input Return Loss | RL | 6 | - | dB | $V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.9, 3.0, 3.1$ GHz |
| Load Mismatch Tolerance | VSWR-T | - | 3:1 | - | $V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.9, 3.0, 3.1$ GHz |
| Load Mismatch Stability | VSWR-S | - | 1.5:1 | - | $V_{CC}=36$ V, $P_{IN}=1.0$ W, $F=2.9, 3.0, 3.1$ GHz |

Broadband Test Fixture Impedances

| F(GHz) | $Z_{IF}(\Omega)$ | $Z_{OF}(\Omega)$ |
|--------|------------------|------------------|
| 2.90 | 35 - j16 | 16 + j2.4 |
| 3.00 | 33 - j17 | 14 + j3.0 |
| 3.10 | 30 - j18 | 12 + j4.0 |

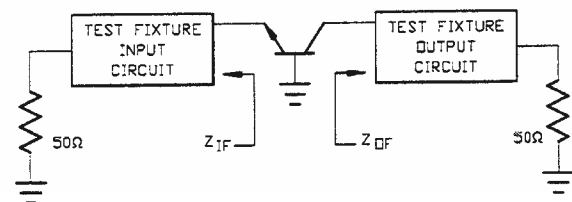

RF Test Fixture

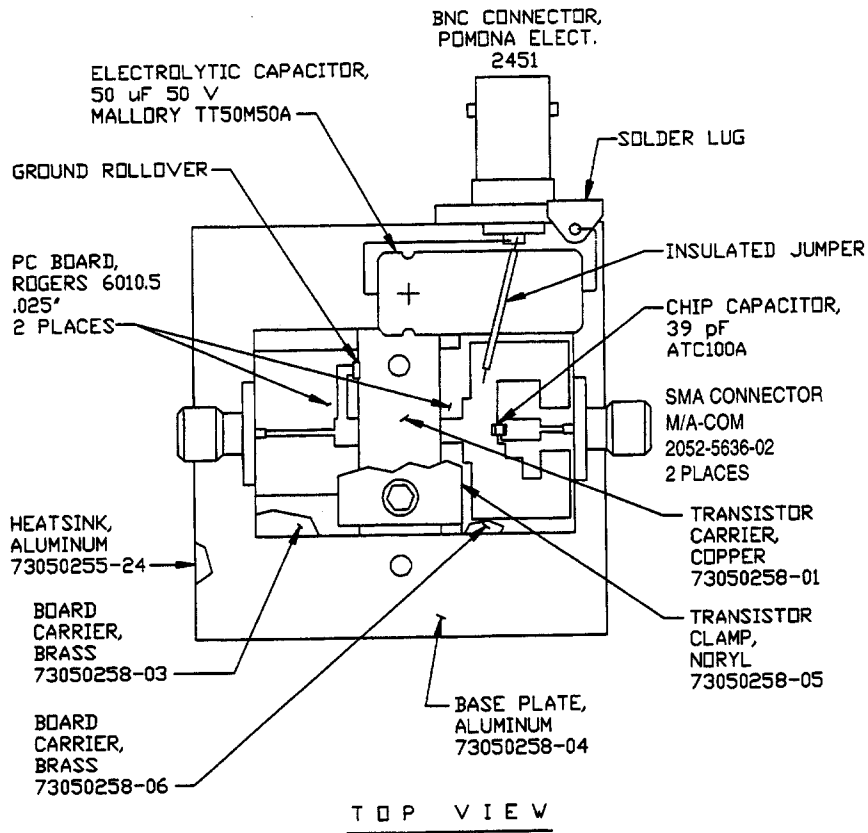

Test Fixture PC Board Dimensions

