



PI5A4624/PI5A4625

**SOTINY™ 1-Ohm, Low-Voltage
Single-Supply SPDT Switch**

Features

- Low On-Resistance: 1-ohm max (+5V Supply)
2-ohm max (+3V Supply)
- R_{ON} Matching: 0.12-ohms max. at 25 °C
- R_{ON} Flatness: 0.12-ohms max. (+5V Supply) at 25 °C
- Low 4nA Input Leakage at 25 °C
- +1.8V to +5.5V Single-Supply Operation
- Fast Switching Time (PI5A4624)
 - 50ns t_{ON}
 - 50ns t_{OFF}
- Break-Before-Make Switching Guaranteed (PI5A4624)
- Make-Before-Break Switching (PI5A4625)
- -57dB Off-Isolation at 1MHz
- TTL/CMOS Logic Compatible
- Low Power Consumption: 5 μ W
- Improved Direct Replacement for MAX4624 & MAX4625
- Packaging (Pb-free & Green available):
 - 6-pin Small Compact SOT-23 (T)

Applications

- Communication Circuits
- Cellular Phones
- Audio and Video Signal Routing
- Portable Battery-Operated Equipment
- Data Acquisition Systems
- Computer Peripherals
- Telecommunications
- Relay Replacement
- Wireless Terminals and Peripherals
- Hard Drives
- Modems


Description

The PI5A4624/PI5A4625 is an improved, direct replacement for the MAX4624/MAX4625 single-pole, double-throw (SPDT) analog switch. Improved specifications include a low maximum On-resistance of 1-ohm and fast switching times ($t_{ON}=50\text{ns}$ max., $t_{OFF}=50$ max.) with 5V supply operation. With a 2.5V supply, resistance is a low 4-ohm max.

Specifications are given for 1.8V, 2.5V, 3.3V and 5V power supply operation. Operating voltage range is +1.8V to +5.5V.

To minimize PC board area use, the PI5A4624/PI5A4625 is available in a compact 6-pin SOT-23 package.

Functional Diagram, Pin Configuration

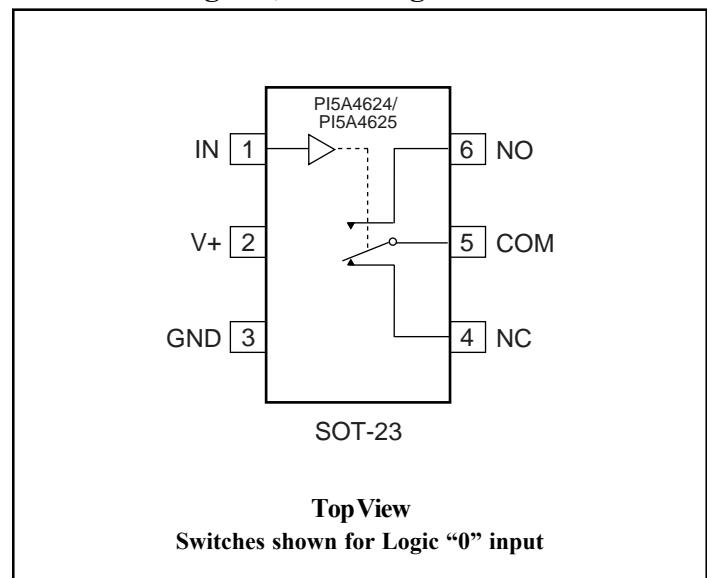

Truth Tables

	PI5A4624/PI5A4625	
Logic	NC	NO
0	ON	OFF
1	OFF	ON

Absolute Maximum Ratings

Voltages Referenced to GND

V^+ $-0.5V$ to $+5.5V$

V_{IN} , V_{COM} , V_{NC} , V_{NO} (Note 1) $-0.5V$ to $V_+ + 0.3V$ or $30mA$, whichever occurs first

Current (any terminal) $\pm 200mA$

Peak Current, COM, NO, NC

(Pulsed at 1ms, 10% duty cycle) $\pm 400mA$

Thermal Information

Continuous Power Dissipation

SOT23-6 (derate $7.1mW/\text{°C}$ above $+70\text{°C}$) $0.5W$

Storage Temperature -65°C to $+150\text{°C}$

Lead Temperature (soldering, 10s) $+300\text{°C}$

Note:

1. Signals on NC, NO, COM, or IN exceeding V^+ or GND are clamped by internal diodes. Limit forward diode current to $30mA$.

Caution: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.

Electrical Specifications - Single +5V Supply

($V^+=+5V \pm 10\%$, $GND=0V$, $V_{INH}=2.4V$, $V_{INL}=0.8V$)

Parameter	Symbol	Conditions	Temp. (°C)	Min. ⁽¹⁾	Typ. ⁽²⁾	Max. ⁽¹⁾	Units	
Analog Switch								
Analog Signal Range ⁽³⁾	V_{ANALOG}		Full	0		V^+	V	
On Resistance	R_{ON}	$V^+=4.5V$, $I_{COM}=-30mA$, V_{NO} or $V_{NC}=+2.5V$	25		0.70	0.90	ohm	
			Full			1.1		
	ΔR_{ON}		25		0.03	0.05		
			Full			0.10		
On-Resistance Flatness ⁽⁵⁾	$R_{FLAT(ON)}$	$V^+=4.5V$, $I_{COM}=-30mA$, V_{NO} or $V_{NC}=0V$, $1.5V$, $2.5V$	25		0.08	0.12	nA	
			Full			0.15		
NO or NC Off Leakage Current ⁽⁶⁾	$I_{NO(OFF)}$ or $I_{NC(OFF)}$	$V^+=5.5V$, $V_{COM}=0V$ V_{NO} or $V_{NC}=4.5V$	25	2	0.01	2	nA	
			Full	-20		20		
COM On Leakage Current ⁽⁶⁾	$I_{COM(ON)}$	$V^+=5.5V$, $V_{COM}=+4.5V$ V_{NO} or $V_{NC}=+4.5V$	25	-4		4		
			Full	-40	0.3	40		

Electrical Specifications - Single +5V Supply (continued)

(V₊=+5V±10%, GND=0V, V_{INH}=2.4V, V_{INL}=0.8V)

Parameter	Symbol	Conditions	Temp. (°C)	Min. ⁽¹⁾	Typ. ⁽²⁾	Max. ⁽¹⁾	Units
Analog Switch							
Input High Voltage	V _{IH}	Guaranteed Logic High Level	Full	2.4			V
Input Low Voltage	V _{IL}	Guaranteed Logic LowLevel				0.8	
Input Current with Voltage High	I _{INH}	V _{IN} = 2.4V, all others = 0.8V		-1	0.005	1	μA
Input Current with Voltage Low	I _{INL}	V _{IN} = 0.8V, all others = 2.4V		-1	0.005	1	
Dynamic							
Turn-On-Time	t _{ON}	V _{CC} = 5V, Figure 1	25		20	35	ns
			Full			40	
Turn-Off-Time	t _{OFF}		25		15	20	
			Full			35	
Break-Before-Make	t _{BBM}	Figure 3 (PI5A4624 Only)	25	1	12	14.5	
			Full	1	17.5		
Make-Before-Break	t _{MBB}	Figure 4 (PI5A4625 Only)	25	1	14	17	
			Full	1	20.5		
Charge Injection ⁽³⁾	Q	C _L = 1nF, V _{GEN} = 0V, R _{GEN} = 0ohm, Figure 2	25		40		pC
Off Isolation	OIRR	R _L = 50ohms, f = 1MHz, Figure 5			-57		dB
CrossTalk ⁽⁸⁾	X _{TALK}	R _L = 50ohms, f = 1MHz, Figure 6			-57		
NC or NO Capacitance	C _{NC/NO (OFF)}	f = 1MHz, Figure 7			42		pF
COM Off Capacitance	C _{COM(OFF)}				83		
COM On Capacitance	C _{COM(ON)}	f = 1MHz, Figure 8			130		
Supply							
Power-Supply Range	V ₊	V _{CC} = 5.5V, V _{IN} = 0V or V ₊	Full	1.8		5.5	V
Positive Supply Current	I ₊				0.5	1	μA

Notes:

- The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
- Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- Guaranteed by design.
- ΔR_{ON} = R_{ON} max. - R_{ON} min.
- Flatness is defined as the difference between the maximum and minimum value of On-resistance measured.
- Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.
- Off Isolation = 20log₁₀ [V_{COM} / (V_{NO} or V_{NC})]. See Figure 5
- Between any two switches. See Figure 6.



Electrical Specifications - Single +3.3V Supply

($V_+ = +3.3V \pm 10\%$, GND = 0V, $V_{INH} = 2.0V$, $V_{INL} = 0.6V$)

Parameter	Symbol	Conditions	Temp. (°C)	Min. ⁽¹⁾	Typ. ⁽²⁾	Max. ⁽¹⁾	Units	
Analog Switch								
Analog Signal Range ⁽³⁾	V_{ANALOG}			0		V_+	V	
On-Resistance	R_{ON}	$V_+ = 3V$, $I_{COM} = -24mA$ V_{NO} or $V_{NC} = 2.0V$	25		1.4	1.8	ohm	
			Full			2.2		
On-Resistance Match Between Channels ⁽⁴⁾	ΔR_{ON}	$V_+ = 3.3V$, $I_{COM} = -24mA$ V_{NO} or $V_{NC} = 0.8V$, 2.0V	25		0.04	0.05	ns	
			Full		0.11			
On-Resistance Flatness	$R_{FLAT(ON)}$		25		0.17	0.2		
			Full		0.25			
Dynamic								
Turn-On-Time	t_{ON}	$V_+ = 3.3V$, V_{NO} or $V_{NC} = 2.0V$, Figure	25		30	40	ns	
			Full			55		
Turn-Off-Time	t_{OFF}		25		20	25		
			Full			40		
Break-Before-Make	t_{BBM}	Figure 3 (PI5A4624 Only)	25	1	21	29		
Make-Break-Before	t_{MBB}	Figure 4 (PI5A4625 Only)	25	1	13	17.5		
Charge Injection ⁽³⁾	Q	$C_L = 1nF$, $V_{GEN} = 0V$, $R_{GEN} = 0V$, Figure 2	25		30		pC	
Supply								
Positive Supply Current	I_+	$V_+ = 3.6V$, $V_{IN} = 0V$ or V_+ All Channels on or off	Full		0.5	1	μA	
Logic Input								
Input High Voltage	V_{IH}	Guaranteed Logic High Level	Full	2			V	
Input Low Voltage	V_{IL}	Guaranteed Logic LowLevel	Full			0.6		
Input High Current	I_{INH}	$V_{IN} = 2.4V$, all others = 0.8V	Full	-1		1	μA	
Input Low Current	I_{INL}	$V_{IN} = 0.8V$, all others = 2.4V	Full	-1		1		

Notes:

- The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
- Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- Guaranteed by design.
- $\Delta R_{ON} = R_{ON}$ max. - R_{ON} min.
- Flatness is defined as the difference between the maximum and minimum value of On-resistance measured.

Electrical Specifications - Single +2.5V Supply

($V_+ = +2.5V \pm 10\%$, $GND = 0V$, $V_{INH} = 1.8V$, $V_{INL} = 0.6V$)

Parameter	Symbol	Conditions	Temp. (°C)	Min. ⁽¹⁾	Typ. ⁽²⁾	Max. ⁽¹⁾	Units	
Analog Switch								
Analog Signal Range ⁽³⁾	V_{ANALOG}			0		V_+	V	
On-Resistance	R_{ON}	$V_+ = 2.5V, I_{COM} = -8mA$ $V_{NO} \text{ or } V_{NC} = 1.8V$	25		1.6	2	Ω	
			Full			2.7		
On-Resistance Match ⁽⁴⁾ Between Channels	ΔR_{ON}	$V_+ = 2.5V, I_{COM} = -8mA$ $V_{NO} \text{ or } V_{NC} = 0.8V, 1.8V$	25		0.13	0.16	ns	
			Full		0.2			
On-Resistance Flatness	$R_{FLAT(ON)}$		25		0.25	0.3		
			Full		0.45			
Dynamic								
Turn-On-Time	t_{ON}	$V_+ = 2.5V, V_{NO} \text{ or } V_{NC} = 1.8V, \text{Figure 1}$	25		40	55	ns	
			Full			70		
Turn-Off-Time	t_{OFF}		25		30	40		
			Full			55		
Break-Before-Make	t_{BBM}	Figure 3 PI5A4624 Only)	25	1	33	39		
Make-Break-Before	t_{MBB}	Figure 4 PI5A4625 Only)	25	1	9	13		
Charge Injection ⁽³⁾	Q	$C_L = 1nF, V_{GEN} = 0V, R_{GEN} = 0V, \text{Figure 2}$	25		20		μC	
Supply								
Positive Supply Current	I_+	$V_+ = 2.75V, V_{IN} = 0V \text{ or } V_+$ All Channels on or off	Full		0.5	1	μA	
Logic Input								
Input High Voltage	V_{IH}	Guaranteed Logic High Level	Full	1.8			V	
Input Low Voltage	V_{IL}	Guaranteed Logic LowLevel	Full			0.6		
Input High Current	I_{INH}	$V_{IN} = 2.0V, \text{all others} = 0.8V$	Full	-1		1	μA	
Input Low Current	I_{INL}	$V_{IN} = 0.8V, \text{all others} = 2.0V$	Full	-1		1		

Notes:

1. The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
3. Guaranteed by design.
4. $\Delta R_{ON} = R_{ON} \text{ max.} - R_{ON} \text{ min.}$
5. Flatness is defined as the difference between the maximum and minimum value of On-resistance measured.

Electrical Specifications - Single +1.8V Supply

($V_+ = +1.8V \pm 10\%$, GND = 0V, $V_{INH} = 1.5V$, $V_{INL} = 0.6V$)

Parameter	Symbol	Conditions	Temp. (°C)	Min. ⁽¹⁾	Typ. ⁽²⁾	Max. ⁽¹⁾	Units	
Analog Switch								
Analog Signal Range ⁽³⁾	V_{ANALOG}			0		V_+	V	
On-Resistance	R_{ON}	$V_+ = 1.8V, I_{COM} = -2mA$ V_{NO} or $V_{NC} = 1.5V$	25		2.8	4	Ohm	
			Full			5		
On-Resistance Match Between Channels ⁽⁴⁾	ΔR_{ON}	$V_+ = 1.8V, I_{COM} = -2mA$ V_{NO} or $V_{NC} = 0.6V, 1.5V$	25		0.44	0.6		
			Full		0.7			
On-Resistance Flatness	$R_{FLAT(ON)}$		25		0.5	0.6		
			Full		0.9			
Dynamic								
Turn-On-Time	t_{ON}	$V_+ = 1.8V, V_{NO}$ or $V_{NC} = 1.5V$, Figure 1	25		65	70	ns	
			Full			95		
Turn-Off-Time	t_{OFF}		25		40	55		
			Full			70		
Break-Before-Make	t_{BBM}	Figure 3 (PI5A4624 Only)	25	1	60	72		
Make-Break-Before	t_{MBB}	Figure 4 (PI5A4625 Only)	25	1	10	14		
Charge Injection ⁽³⁾	Q	$C_L = 1nF, V_{GEN} = 0V,$ $R_{GEN} = 0V$, Figure 2	25		10		pC	
Supply								
Positive Supply Current	I_+	$V_+ = 2.0V, V_{IN} = 0V$ or V_+ All Channels on or off	Full		0.5	1	µA	
Logic Input								
Input High Voltage	V_{IH}	Guaranteed Logic High Level	Full	1.8			V	
Input Low Voltage	V_{IL}	Guaranteed Logic LowLevel	Full			0.6		
Input High Current	I_{INH}	$V_{IN} = 1.5V$, all others = 0.8V	Full	-1		1	µA	
Input Low Current	I_{INL}	$V_{IN} = 0.8V$, all others = 1.5V	Full	-1		1		

Notes:

- The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
- Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- Guaranteed by design.
- $\Delta R_{ON} = R_{ON}$ max. - R_{ON} min.
- Flatness is defined as the difference between the maximum and minimum value of On-resistance measured.

Test Circuits/Timing Diagrams

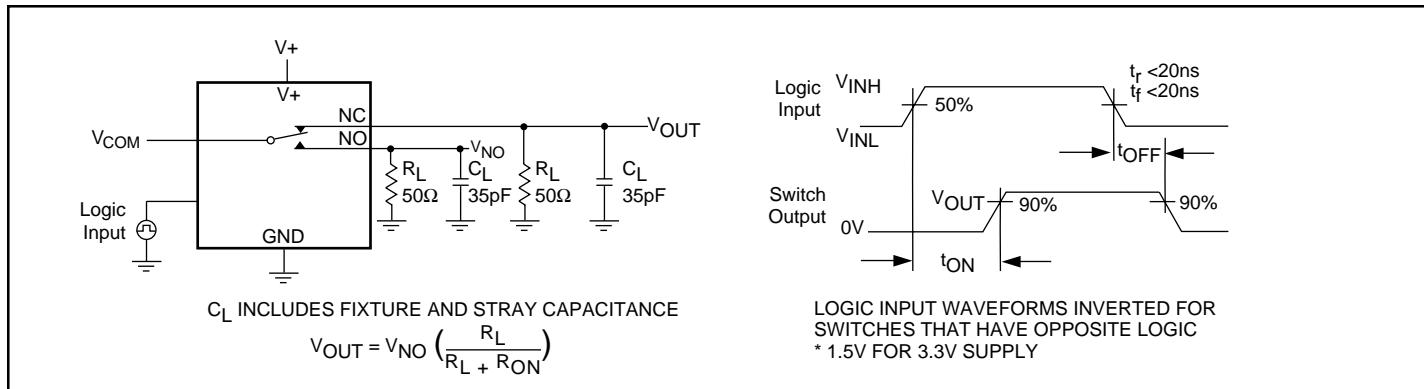


Figure 1. Switching Time

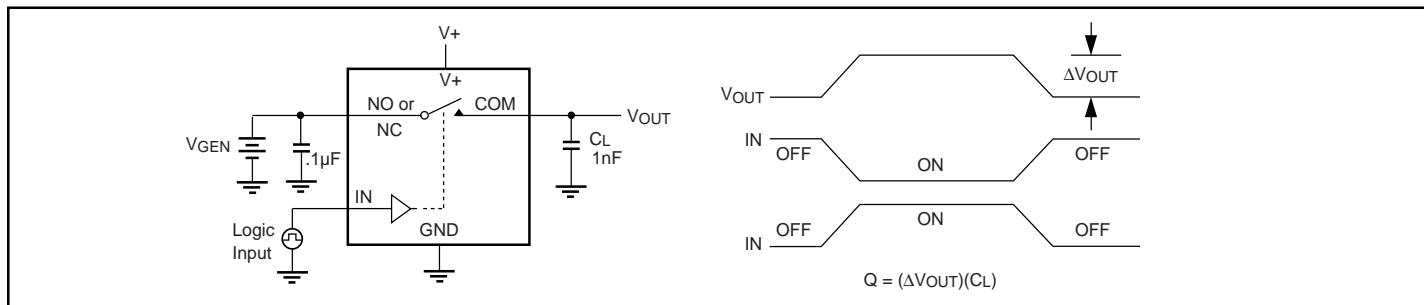


Figure 2. Charge Injection

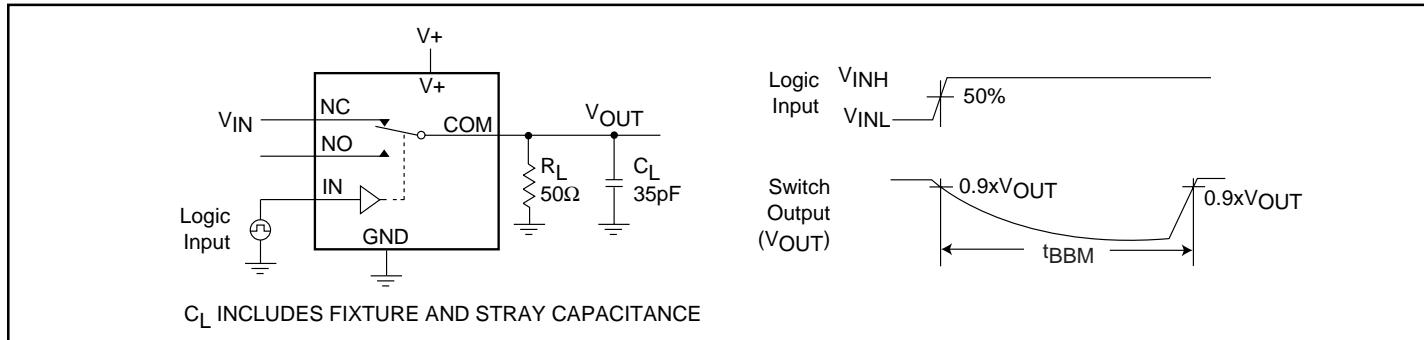


Figure 3. Break-Before-Make Interval (PI5A4624)

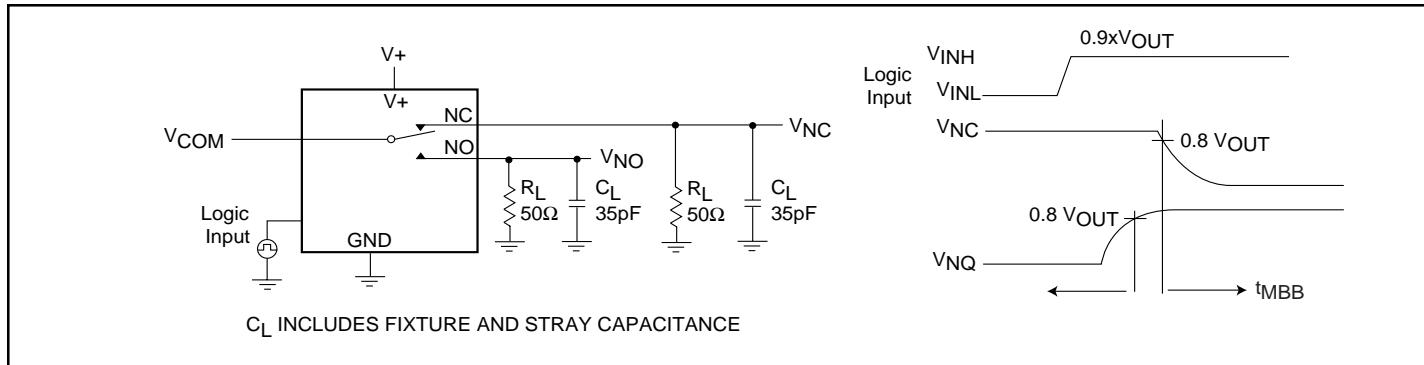
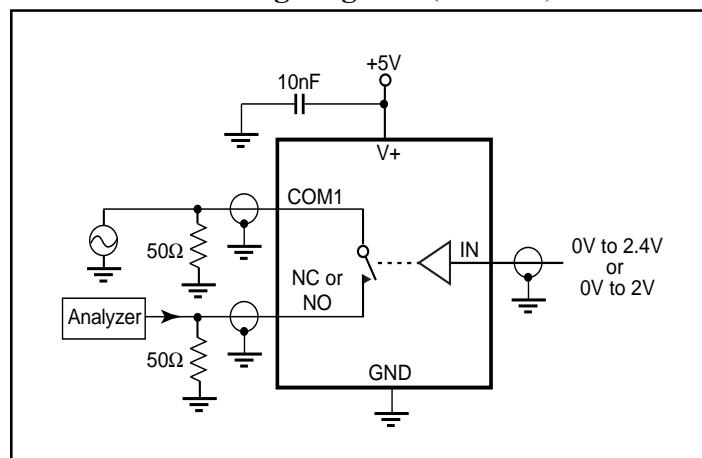
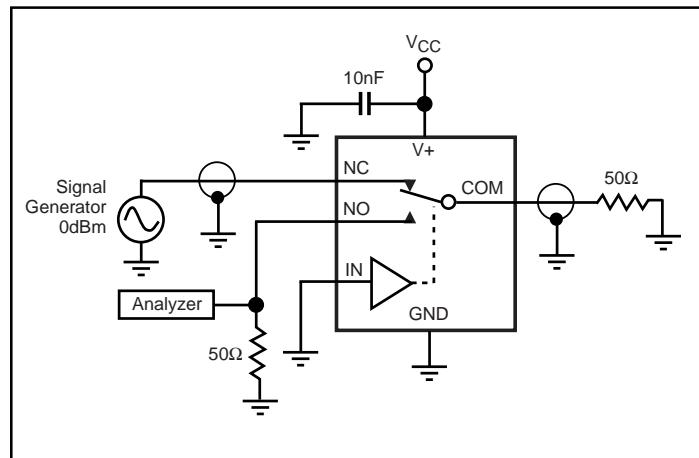
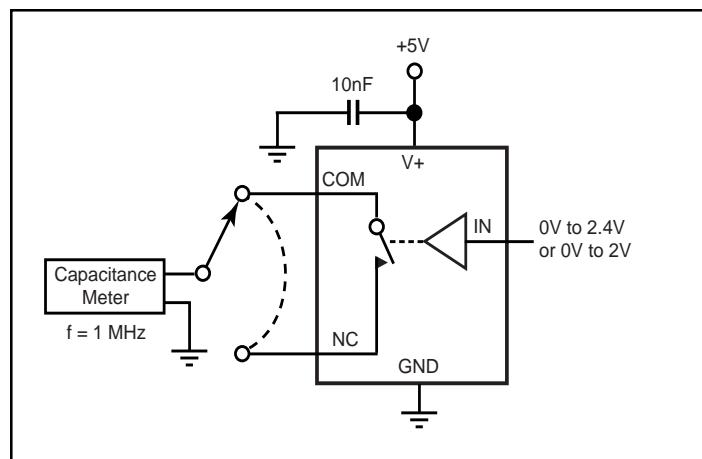
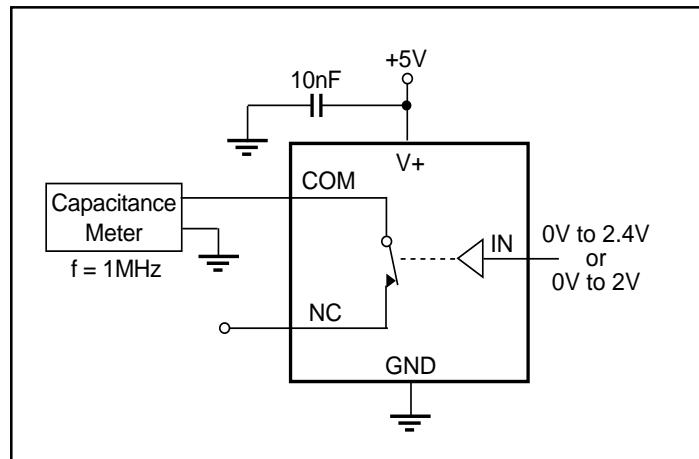
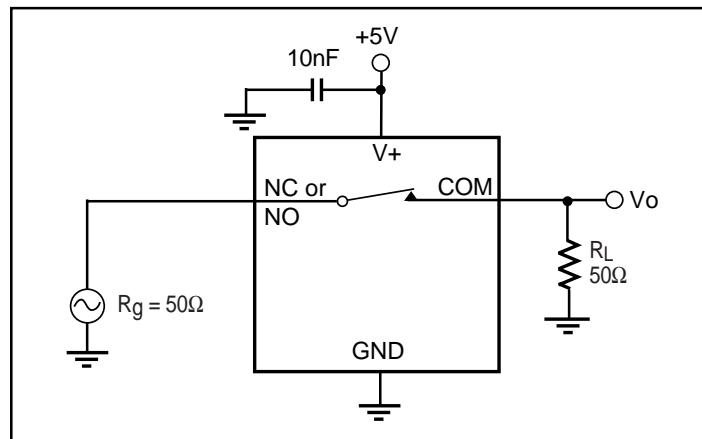
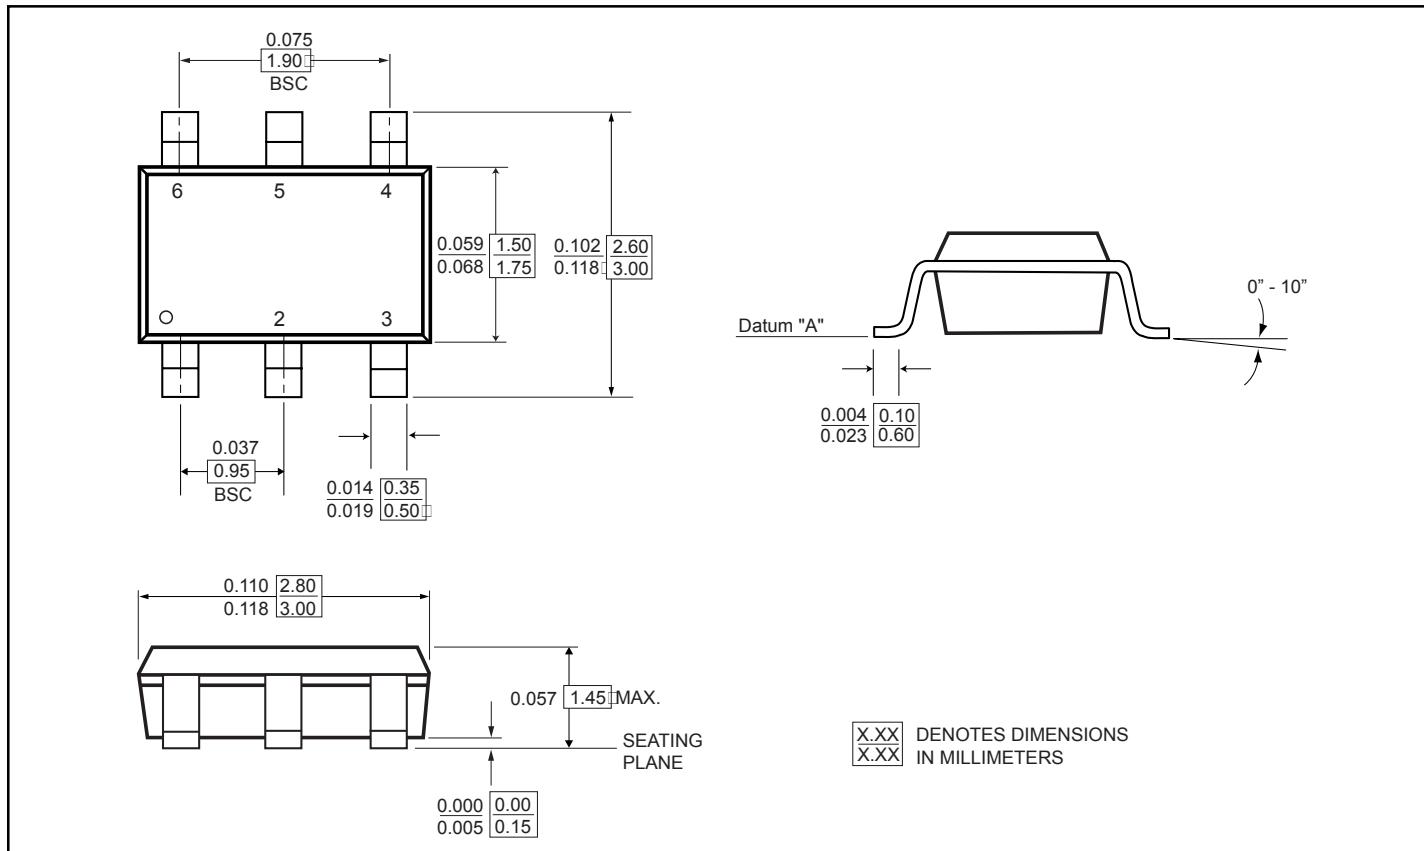


Figure 4. Make-Before-Break Interval (PI5A4625)

Test Circuits/Timing Diagrams (continued)

Figure 5. Off Isolation/On-Channel Bandwidth

Figure 6. Crosstalk

Figure 7. Channel-Off Capacitance

Figure 8. Channel-On Capacitance

Figure 9. Bandwidth

Packaging Mechanical: 6-Pin SOT-23 (T)

Ordering Information

Ordering Code	Package Code	Package Description	Top Marking
PI5A4624TX	T	6-pin SOT-23	ZK
PI5A4624TEX	T	Pb-free & Green, 6-pin SOT-23	ZK
PI5A4625TX	T	6-pin SOT-23	ZJ
PI5A4625TEX	T	Pb-free & Green, 6-pin SOT-23	ZJ

Notes:

1. Thermal Characteristics can be found on the world wide web at www.pericom.com/packaging/
2. Number of transistors : 753 (Both devices)
3. X = Tape and reel

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com