

# PM30CTJ060-3

FLAT-BASE TYPE  
INSULATED PACKAGE

## PM30CTJ060-3



- 600V, 30A Current-sense 6kHz IGBT type inverter
- Built in IGBT gate drive circuit
- Built in Faule OC, SC, OT & UV protection Fault output
- 2.2kW class inverter application

## APPLICATION

Air conditioner, mortor control


## OUTLINE DRAWING

Dimensions in mm

NOTE : X IS 3.56 ±0.3×11


A · B : TERMINAL NAME

- |         |         |
|---------|---------|
| 1. VUPC | 11. VN1 |
| 2. UP   | 12. UN  |
| 3. VUP1 | 13. VN  |
| 4. VVPC | 14. WN  |
| 5. VP   | 15. FO  |
| 6. VVP1 | 16. P   |
| 7. VWPC | 17. N   |
| 8. WP   | 18. U   |
| 9. VWP1 | 19. V   |
| 10. VNC | 20. W   |

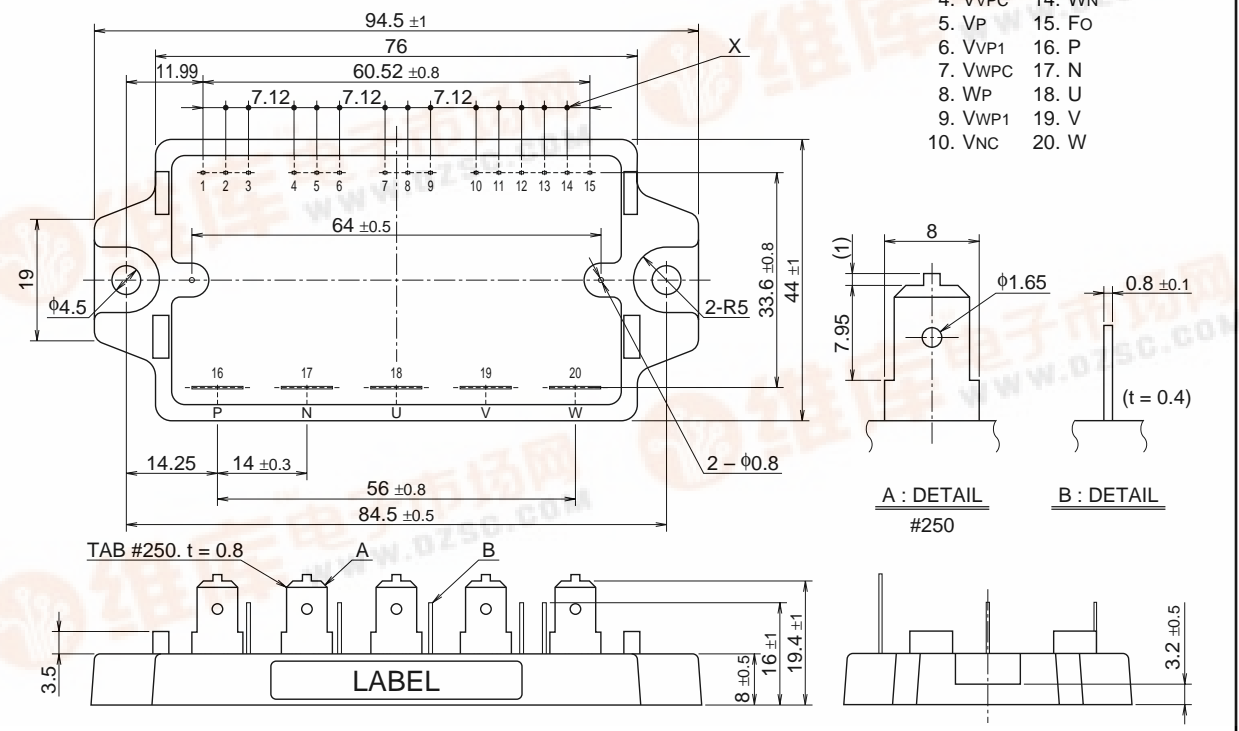

# PM30CTJ060-3

FLAT-BASE TYPE  
INSULATED PACKAGE

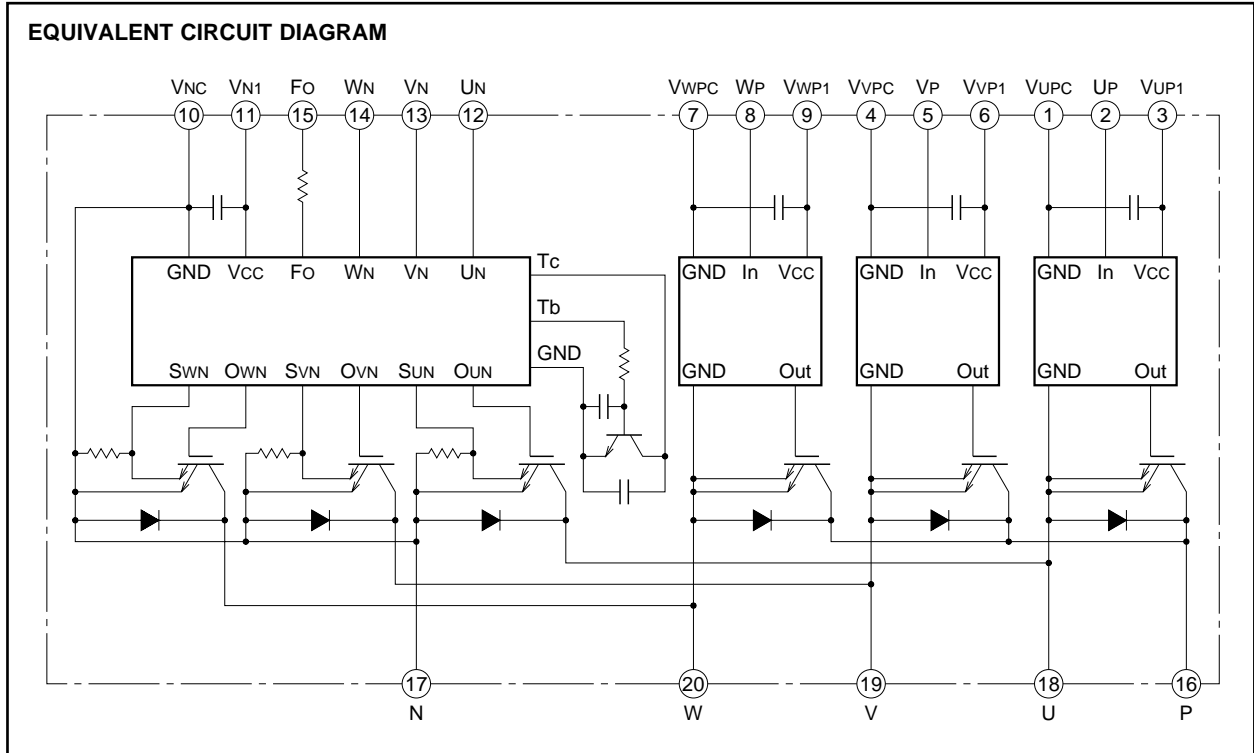

**MAXIMUM RATINGS** ( $T_j = 25^\circ\text{C}$ , unless otherwise noted)

**INVERTER PART**

| Symbol       | Parameter                 | Conditions                                   | Ratings           | Unit             |
|--------------|---------------------------|--|-------------------|------------------|
| $V_{CES}$    | Collector-emitter voltage | $V_D = 15\text{V}$ , $I_{CIN} = 10\text{mA}$ | 600               | V                |
| $\pm I_C$    | Collector current         | $T_C = 25^\circ\text{C}$                     | 30                | A                |
| $\pm I_{CP}$ | Collector current (peak)  | $T_C = 25^\circ\text{C}$                     | 60                | A                |
| $P_C$        | Collector dissipation     | $T_C = 25^\circ\text{C}$                     | 83                | W                |
| $T_j$        | Junction temperature      |  | $-20 \sim +125^*$ | $^\circ\text{C}$ |

\* maximum instantaneous  $T_j \leq 150^\circ\text{C}$

**CONTROL PART**

| Symbol    | Parameter                   | Conditions   | Ratings | Unit |
|-----------|-----------------------------|--|---------|------|
| $V_D$     | Supply voltage              | Applied between : $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}$<br>$V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$     | 20      | V    |
| $I_{CIN}$ | Input current               | Applied between : $U_P-V_{UPC}$ , $V_P-V_{VPC}$ , $W_P-V_{WPC}$ , $U_N \cdot V_N \cdot W_N-V_{NC}$ | 20      | mA   |
| $V_{FO}$  | Fault output supply voltage | Applied between : $F_O-V_{NC}$   | 20      | V    |
| $I_{FO}$  | Fault output current        | Sink current of $F_O$ terminal   | 20      | mA   |


# PM30CTJ060-3

FLAT-BASE TYPE  
INSULATED PACKAGE

## TOTAL SYSTEM

| Symbol           | Parameter                           | Conditions  | Ratings    | Unit             |
|------------------|-------------------------------------|---|------------|------------------|
| VCC(PROT)        | Supply voltage protected by OC & SC | V <sub>D</sub> = 13.5 ~ 16.5V,<br>Inverter part, T <sub>j</sub> = 125°C start | 400        | V                |
| VCC              | Supply voltage                      | Applied between : P-N, operating time   | 450        | V                |
| VCC(surge)       | Supply voltage (surge)              | Applied between : P-N, surge and non-operating time                           | 500        | V                |
| T <sub>C</sub>   | Module case operating temperature   | (Note 1)  | -20 ~ +100 | °C               |
| T <sub>stg</sub> | Storage temperature                 |   | -40 ~ +125 | °C               |
| V <sub>iso</sub> | Isolation voltage                   | 60Hz, sinusoidal, AC · 1 min  | 2500       | V <sub>rms</sub> |

Note 1 : T<sub>C</sub> measuring point is as shown below.



## ELECTRICAL CHARACTERISTICS (T<sub>j</sub> = 25°C, unless otherwise noted)

### INVERTER PART

| Symbol               | Parameter                            | Test conditions   | Limits |      |      | Unit |
|----------------------|--------------------------------------|---|--------|------|------|------|
|                      |                                      |   | Min.   | Typ. | Max. |      |
| V <sub>CE(sat)</sub> | Collector-emitter saturation voltage | V <sub>D</sub> = 15V, I <sub>CIN</sub> = 10mA   | —      | 1.8  | 2.6  | V    |
|                      |                                      | I <sub>C</sub> = 30A, T <sub>j</sub> = 25°C<br>I <sub>C</sub> = 30A, T <sub>j</sub> = 125°C   | —      | 2.0  | 3.0  |      |
| V <sub>EC</sub>      | FWDi forward voltage                 | -I <sub>C</sub> = 30A, V <sub>D</sub> = 15V, I <sub>CIN</sub> = 0mA   | —      | 2.5  | 3.5  | V    |
| t <sub>on</sub>      | Switching time                       | V <sub>D</sub> = 15V, I <sub>CIN</sub> = 0mA↔10mA<br>V <sub>CC</sub> = 300V, I <sub>C</sub> = 30A<br>T <sub>j</sub> = 125°C<br>(Per 1 arm) Inductive Load | 0.5    | 1.0  | 2.0  | μs   |
| t <sub>tr</sub>      |                                      |   | —      | 0.1  | —    | μs   |
| t <sub>c(on)</sub>   |                                      |   | —      | 0.3  | 0.9  | μs   |
| t <sub>off</sub>     |                                      |   | —      | 3.0  | 4.0  | μs   |
| t <sub>c(off)</sub>  |                                      |   | —      | 1.0  | 2.0  | μs   |
| I <sub>CES</sub>     | Collector-emitter cutoff current     | V <sub>CE</sub> = V <sub>CEs</sub> , I <sub>CIN</sub> = 0mA   | —      | —    | 1    | mA   |
|                      |                                      | T <sub>j</sub> = 25°C<br>T <sub>j</sub> = 125°C   | —      | —    | 10   |      |

### CONTROL PART

| Symbol               | Parameter                                 | Test conditions  | Limits      |      |      | Unit |    |
|----------------------|---|--|-------------|------|------|------|----|
|                      |   |  | Min.        | Typ. | Max. |      |    |
| I <sub>D</sub>       | Circuit current                           | V <sub>D</sub> = 15V, I <sub>CIN</sub> = 0mA                           | —           | 25   | 35   | mA   |    |
|                      |   | V <sub>N1</sub> -V <sub>Nc</sub><br>V <sub>XP1</sub> -V <sub>XPC</sub> | —           | 5    | 10   |      |    |
| I <sub>th(ON)</sub>  | Input on threshold current                | Applied between : UP-VUPC, VP-VVPC, WP-VWPC                            | 1           | 3    | 5    | mA   |    |
| I <sub>th(OFF)</sub> | Input off threshold current               | U <sub>N</sub> · V <sub>N</sub> · W <sub>N</sub> -V <sub>Nc</sub>      | 1           | 3    | 5    | mA   |    |
| OC                   | Over current trip level                   | -20°C ≤ T <sub>j</sub> ≤ 125°C, V <sub>D</sub> = 15V (only N side)     | 41          | 46   | —    | A    |    |
| SC                   | Short circuit trip level                  | -20°C ≤ T <sub>j</sub> ≤ 125°C, V <sub>D</sub> = 15V (only N side)     | —           | 69   | —    | A    |    |
| t <sub>off(OC)</sub> | Over current delay time                   | V <sub>D</sub> = 15V   | —           | 10   | —    | μs   |    |
| OT                   | Over temperature protection               | Base-plate   | Trip level  | 100  | 110  | 120  | °C |
| OT <sub>r</sub>      |   | Temperature detection, V <sub>D</sub> = 15V                            | Reset level | —    | 90   | —    | °C |
| UV                   | Supply circuit under voltage protection   | -20°C ≤ T <sub>j</sub> ≤ 125°C (only N side)                           | Trip level  | 11.5 | 12.0 | 12.5 | V  |
| UV <sub>r</sub>      |   |  | Reset level | —    | 12.5 | —    | V  |
| I <sub>FO(H)</sub>   | Fault output current (Note 2)             | V <sub>D</sub> = 15V, V <sub>FO</sub> = 15V                            | —           | —    | 0.01 | mA   |    |
| I <sub>FO(L)</sub>   |   |  | —           | 10   | 15   |      |    |
| t <sub>FO</sub>      | Minimum fault output pulse width (Note 2) | V <sub>D</sub> = 15V   | 1.0         | 1.8  | —    | ms   |    |

Note 2 : Fault output is given only when the internal OC, SC, OT & UV protection. (only N side)

Fault output of OC, SC protection given pulse.

Fault output of OT, UV protection given pulse while over level. (OT is only N side)

# PM30CTJ060-3

FLAT-BASE TYPE  
INSULATED PACKAGE

## THERMAL RESISTANCES

| Symbol                | Parameter                            | Test conditions                                     | Limits |      |      | Unit   |
|-----------------------|--------------------------------------|---|--------|------|------|--------|
|                       |                                      |   | Min.   | Typ. | Max. |        |
| R <sub>th(j-c)Q</sub> | Junction to case thermal resistances | Inverter IGBT part, per 1/6 module                  | —      | —    | 1.5  | °C / W |
| R <sub>th(j-c)F</sub> |                                      | Inverter FWDi part, per 1/6 module                  | —      | —    | 4.5  | °C / W |
| R <sub>th(c-f)</sub>  | Contact thermal resistance           | Case to fin, thermal grease applied, per 1/6 module | —      | —    | 0.4  | °C / W |

## MECHANICAL RATINGS AND CHARACTERISTICS

| Symbol | Parameter       | Test conditions     | Limits |      |      | Unit  |
|--------|-----------------|---------------------|--------|------|------|-------|
|        |                 |                     | Min.   | Typ. | Max. |       |
| —      | Mounting torque | Mounting screw : M4 | 0.98   | 1.18 | 1.47 | N·m   |
| —      |                 |                     | 10     | 12   | 15   | kg·cm |
| —      | Weight          |                     | —      | 80   | —    | g     |

## RECOMMENDED CONDITIONS FOR USE

| Symbol                | Parameter                       | Test conditions   | Ratings  | Unit |
|-----------------------|---------------------------------|---|----------|------|
| V <sub>CC</sub>       | Supply voltage                  | Applied between : P-N   | ≤ 400    | V    |
| V <sub>D</sub>        |                                 | Applied between : V <sub>UP1</sub> -V <sub>UPC</sub> , V <sub>VP1</sub> -V <sub>VPC</sub><br>V <sub>WP1</sub> -V <sub>WPC</sub> , V <sub>UN1</sub> -V <sub>UNC</sub> (Note 3) | 15 ± 1.5 | V    |
| I <sub>CIN(ON)</sub>  | Input on current                | Applied between : U <sub>P</sub> , V <sub>P</sub> , W <sub>P</sub> , U <sub>N</sub> , V <sub>N</sub> , W <sub>N</sub>   | ≥ 5      | mA   |
| I <sub>CIN(OFF)</sub> | Input off current               |   | ≤ 1      | mA   |
| f <sub>PWM</sub>      | PWM input frequency             | Using application circuit Opto-coupler's input signal   | ≤ 8      | kHz  |
| t <sub>dead</sub>     | Arm shoot-through blocking time | Using application circuit Opto-coupler's input signal   | ≥ 3.5    | μs   |


Note 3 : Permissible ripple value : dv/dt ≤ ±5V/μs, V<sub>ripple</sub> ≤ 2V<sub>P-P</sub>

# PM30CTJ060-3


FLAT-BASE TYPE  
INSULATED PACKAGE

PERFORMANCE CURVES


OUTPUT CHARACTERISTICS (TYPICAL)

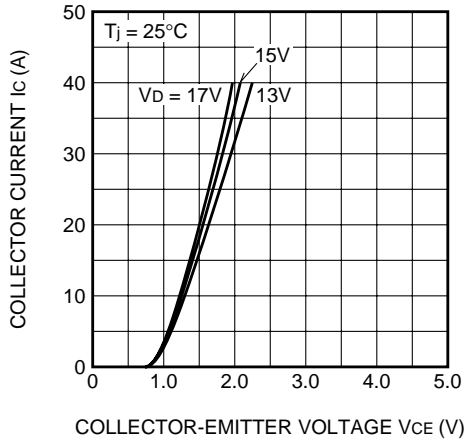


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

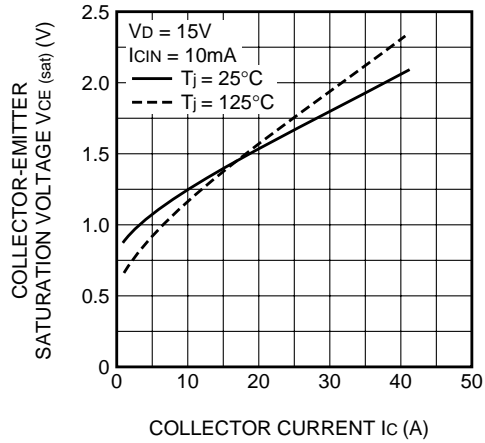


COLLECTOR-EMITTER SATURATION VOLTAGE VS. SUPPLY VOLTAGE (TYPICAL)

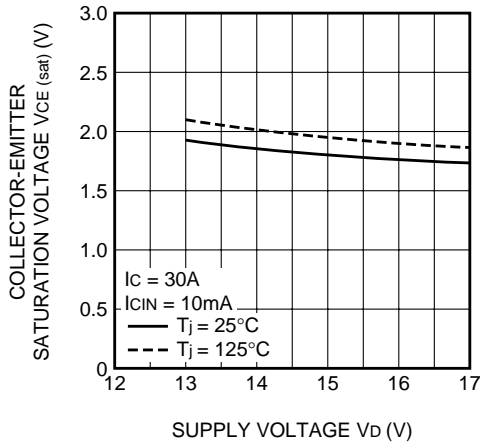


SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)

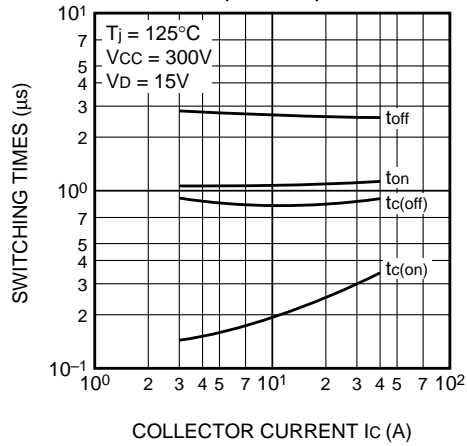

FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

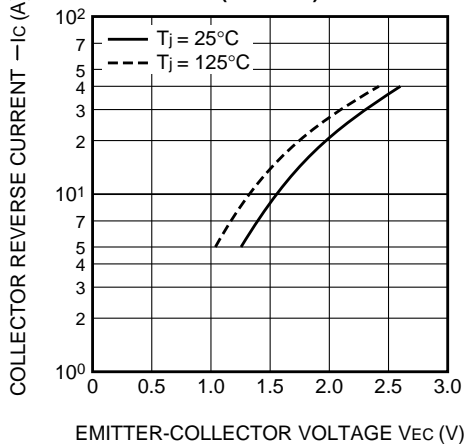

REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

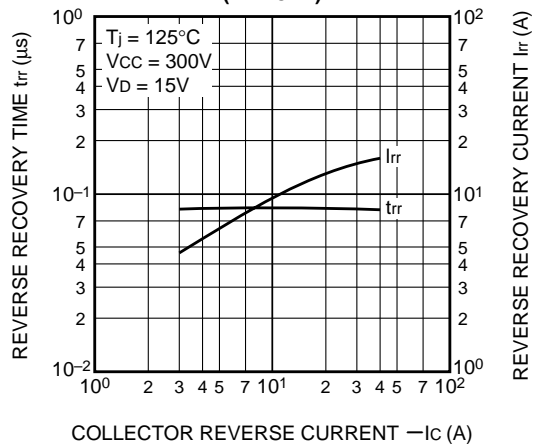

# PM30CTJ060-3

FLAT-BASE TYPE  
INSULATED PACKAGE

