




RESPECTIVE END ORIENTATIONS

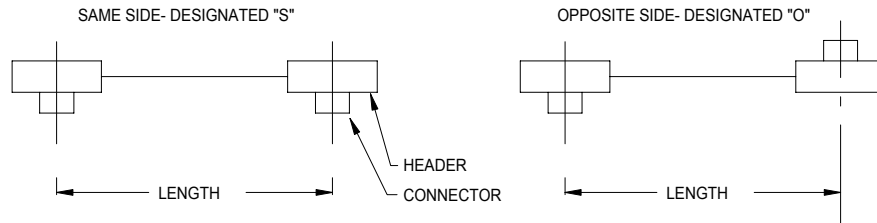

REVISIONS			
LTR	DESCRIPTION	DATE	APPRVD
-	INITIAL RELEASE	1/5/98	
A	ADDED .345" DIMENSION TO HEADER	4/1/99	
B	CHANGED HEADER WIDTH FROM 1.00" TO 0.870"	10/21/99	
	TO MATCH CURRENT PRODUCTION MOLDS		
C	ADDED EXAMPLE P/N	3/14/02	C.D.

CREATING A PART NUMBER

CONNECTOR ORIENTATION WITH RESPECT TO CABLE

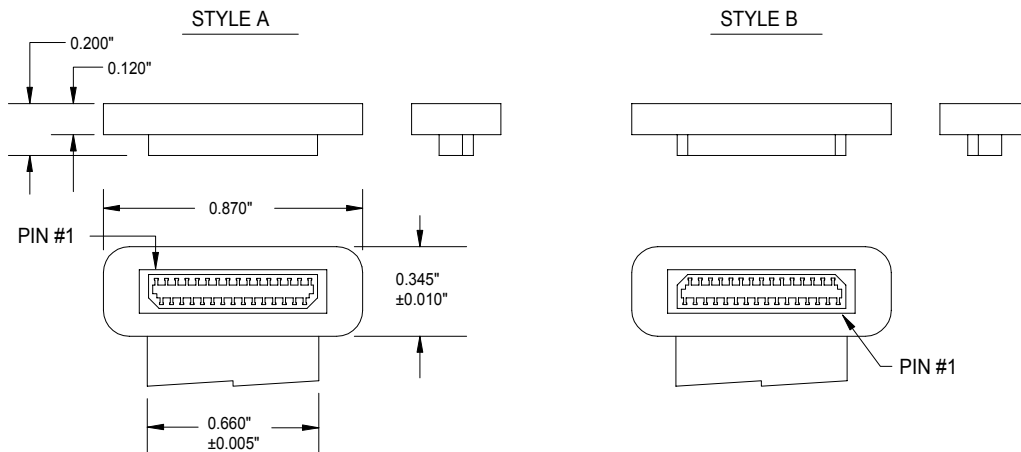

i.e. PS563AA0254S C

EXAMPLE GIVEN INDICATES A 31 POS. CABLE ASSEMBLY TERMINATED WITH HIROSE CONNECTORS (P/N DF9C-31S-1V) IN WHICH PIN #1 TRACES TO PIN #1, ASSEMBLY IS 10.000" IN LENGTH, AND CONNECTORS ARE ON OPPOSITE SIDES OF CABLE AS DEFINED AT LEFT.

NOTES

- 1) INSULATION: 0.002" THICK POLYESTER
- 2) CONDUCTORS: 0.003" X 0.011" (29 PLACES)
0.003" X 0.026" (2 PLACES, OUTER)
- 3) HEADER MATERIAL: DUPONT 612 NYLON
- 4) CONNECTOR: HIROSE P/N DF9C-31S-1V
- 5) CABLE RATING: AWM STYLE 20890 105°C, 90V, VW-1
- 6) CABLE THICKNESS= 0.010"±0.002"
- 7) CABLE WIDTH= 0.660"±0.005"

TOLERANCES	MATERIAL		P ARLEX CORPORATION 7 INDUSTRIAL WAY SALEM, NH 03079 LAMINATED CABLE DIVISION			
	DR	DATE				
	C.Dobens	1/5/98				
	CHK		END DETAILS FOR TERMINATING CABLE WITH 31 POS. S/M HIROSE CONNECTORS			
.XXX ±	ENG	DATE	SIZE	FSCM	PS-563	REV
.XX ±	C.Dobens	1/5/98	B	18377		C
ANGLES ±	APPD		SCALE	2:1	SHEET	1 OF 1