



查询PSA3445C供应商


**Z-Communications, Inc.**

9939 Via Pasar • San Diego, CA 92126  
TEL (858) 621-2700 FAX (858) 621-2722


捷多邦, 专业PCB打样工厂, 24小时加急出货

**PSA3445C**

**PHASE LOCKED LOOP**  
Rev A1

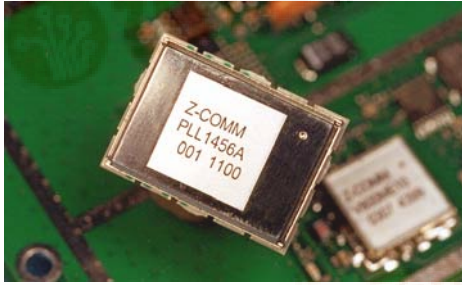

### PHASE NOISE (1 Hz BW, typical)

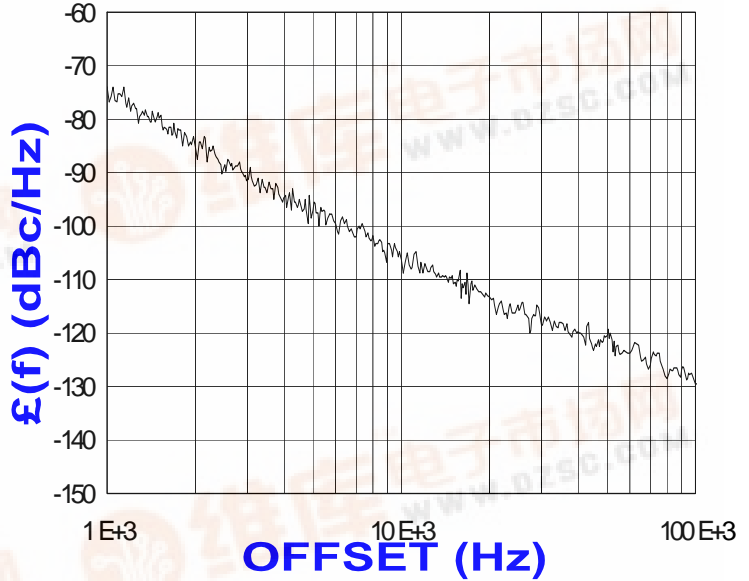

#### FEATURES

- Frequency Range: 3430 - 3460 MHz
- Step Size: 1000 KHz
- PLL-24H - Style Package

#### APPLICATIONS

- Telecommunications
- Satellite
- Telemetry

#### PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Frequency Range	3430 - 3460	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-106	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Sideband Spurs (typ.)	-70	dBc
Power Output	0±3	dBm
Load Impedance	50	Ω
Step Size	1000	KHz
Charge Pump Output Current	2500	μA
Switching Speed (typ., adjacent channel)	2.5	mSec
Startup Lock Time (typ.)	2	mSec
Operating Temperature Range	-40 to 85	°C
Package Style	PLL-24H	

#### POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	40	mA

All specifications are typical unless otherwise noted and subject to change without notice.

#### APPLICATION NOTES


- AN-107 : How to Solder Z-COMM VCOs / PLLs
- AN-200 : Mounting and Grounding of Z-COMM PLLs
- AN-201 : PLL Fundamentals      AN-202 : PLL Functional Description

#### NOTES:


Reference Oscillator Signal: 5 MHz <math>f\_{osc}</math> <math><100</math> MHz  
Frequency Synthesizer: Analog Devices - ADF4106

Prescaler: 32


**VCO TUNING CURVE, typ.**

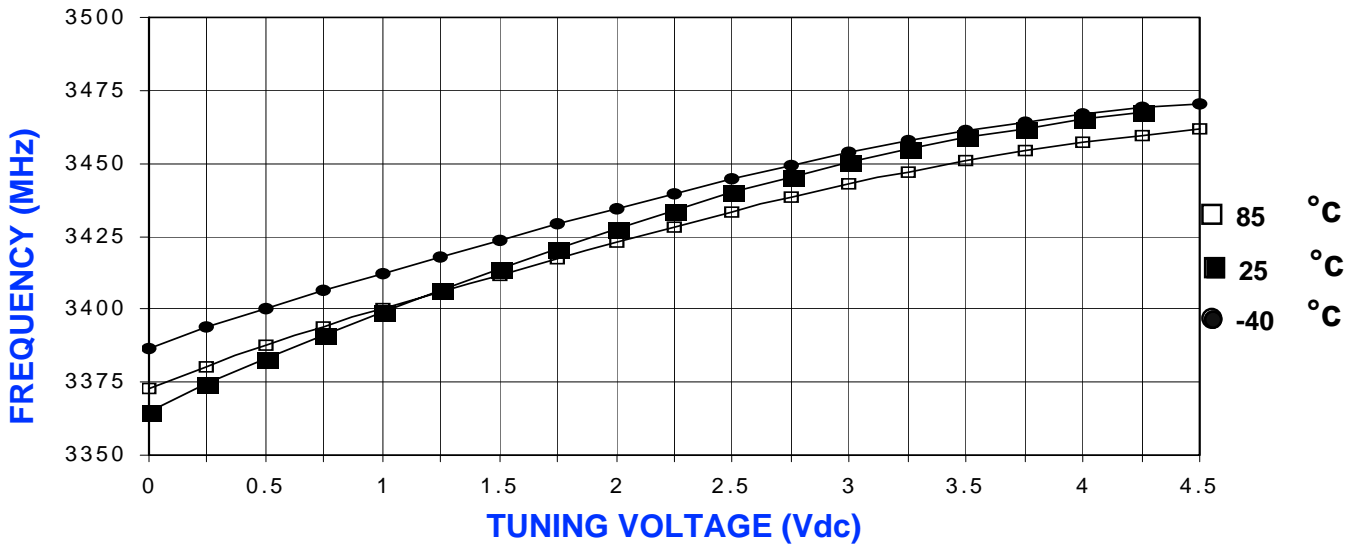

**VCO POWER CURVE, typ.**

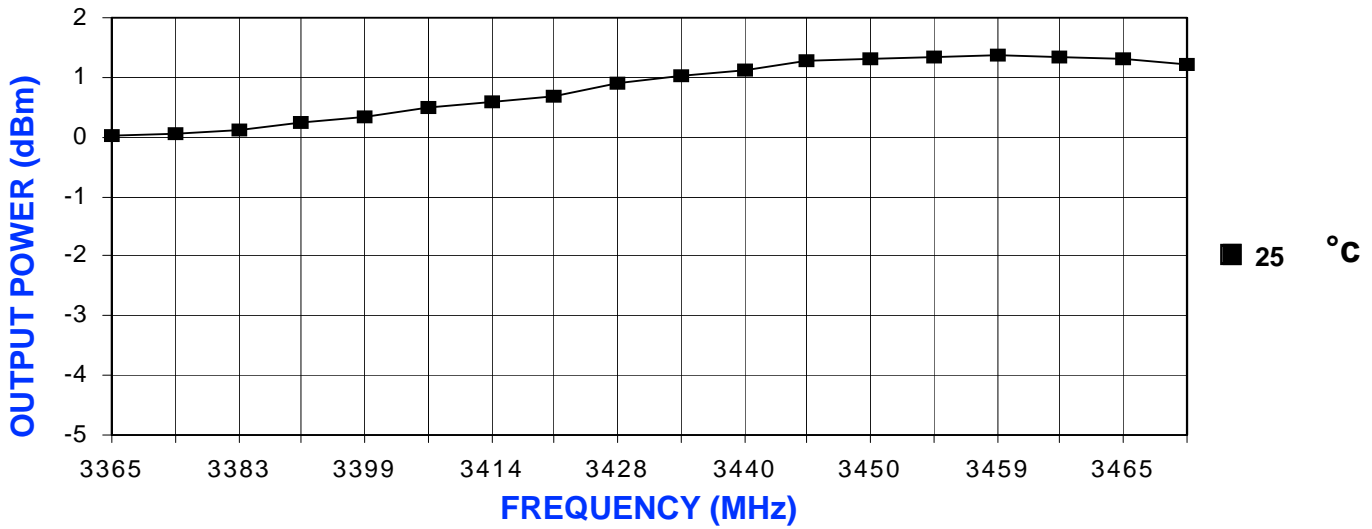

**PHYSICAL DIMENSIONS**

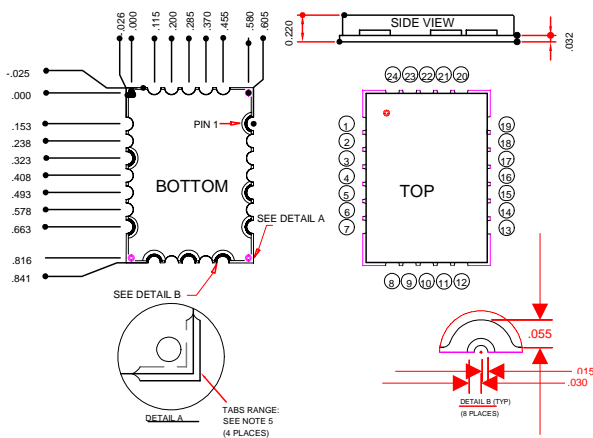

1. The inside radius of all 24 half holes at the perimeter of the board are plated to provide a surface for the attachment of the PLL Module to the PCB. 16 pads are for grounding, 8 pads are for signal interface.
2. The surface of the shield is tin-plated and may be soldered to. The shield's base metal is cold-rolled steel.
3. The ground plane on the bottom side is ground and attaches to a ground track on the top side of the board as well as to the shield.
4. Unless otherwise noted all dimensions are in inches.
5. Unless otherwise noted all tolerances are as follows:  
.xxx = ± .010.

- P1 RF OUTPUT
- P2-4 GROUND
- P5 REFERENCE OSCILLATOR INPUT
- P6 GROUND
- P7 CLOCK
- P8 DATA
- P9 GROUND
- P10 LOAD ENABLE
- P11 GROUND
- P12 LOCK DETECT
- P13 VCC
- P14 GROUND
- P15 GROUND
- P16 GROUND
- P17 NO CONNECTION
- P18-24 GROUND