

THYRISTOR MODULE (NON-ISOLATED TYPE)



PWB100A

PWB100A is a Thyristor module suitable for low voltage, 3 phase rectifier applications.

- $I_{T(AV)}$ 100A (each device)
- High Surge Current 3500 A (60Hz)
- Easy Construction
- Non-isolated. Mounting base as common Anode terminal

(Applications)

Welding power Supply
Various DC power Supply

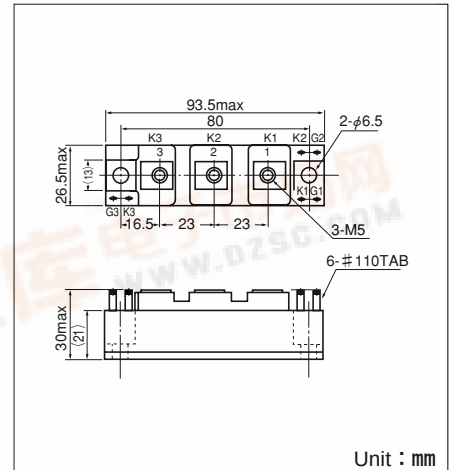

Unit : mm

Maximum Ratings


Symbol	Item	Ratings		Unit
		PWB100A30	PWB100A40	
VRRM	Repetitive Peak Reverse Voltage	300	400	V
VRSM	Non-Repetitive Peak Reverse Voltage	360	480	V
VDRM	Repetitive Peak Off-State Voltage	300	400	V

Symbol	Item	Conditions	Ratings	Unit
$I_{T(AV)}$	Average On-State Current	Single phase, half wave, 180° conduction, $T_c : 114^\circ\text{C}$	100	A
$I_{T(RMS)}$	R.M.S. On-State Current	Single phase, half wave, 180° conduction, $T_c : 114^\circ\text{C}$	157	A
I_{TSM}	Surge On-State Current	$\frac{1}{2}$ cycle, 50Hz/60Hz, peak value, non-repetitive	3200/3500	A
I^2t	I^2t		51000	A ² S
P _{GM}	Peak Gate Power Dissipation		10	W
P _{G(AV)}	Average Gate Power Dissipation		1	W
I _{FGM}	Peak Gate Current		3	A
V _{FGM}	Peak Gate Voltage (Forward)		10	V
V _{RGM}	Peak Gate Voltage (Reverse)		5	V
di/dt	Critical Rate of Rise of On-State Current	$I_G = 200\text{mA}$, $T_j = 25^\circ\text{C}$, $V_D = \frac{1}{2}V_{DRM}$, $dI_G/dt = 1\text{A}/\mu\text{s}$	50	A/ μs
T _j	Operating Junction Temperature		-30 to +150	°C
T _{stg}	Storage Temperature		-30 to +125	°C
Mounting Torque	Mounting (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	N·m
	Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	(kgf·cm)
Mass			170	g


Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I _{DRM}	Repetitive Peak Off-State Current, max.	at V_{DRM} , single phase, half wave, $T_j = 150^\circ\text{C}$	15	mA
I _{RRM}	Repetitive Peak Reverse Current, max.	at V_{DRM} , single phase, half wave, $T_j = 150^\circ\text{C}$	15	mA
V _{TM}	Peak On-State Voltage, max.	On-State Current 310A, $T_j = 25^\circ\text{C}$ Inst. measurement	1.20	V
I _{GT} /V _{GT}	Gate Trigger Current/Voltage, max.	$T_j = 25^\circ\text{C}$, $I_T = 1\text{A}$, $V_D = 6\text{V}$	150/2	mA/V
V _{GD}	Non-Trigger Gate, Voltage. min.	$T_j = 150^\circ\text{C}$, $V_D = \frac{1}{2}V_{DRM}$	0.25	V
t _{gt}	Turn On Time, max.	$I_T = 100\text{A}$, $I_G = 200\text{mA}$, $T_j = 25^\circ\text{C}$, $V_D = \frac{1}{2}V_{DRM}$, $dI_G/dt = 1\text{A}/\mu\text{s}$	10	μs
dv/dt	Critical Rate of Rise of Off-State Voltage, min.	$T_j = 150^\circ\text{C}$, $V_D = \frac{2}{3}V_{DRM}$, Exponential wave.	50	V/ μs
I _H	Holding Current, typ.	$T_j = 25^\circ\text{C}$	70	mA
R _{th(j-c)}	Thermal Impedance, max.	Junction to case ($\frac{1}{3}$ Module)	0.3	°C/W


Gate Characteristics

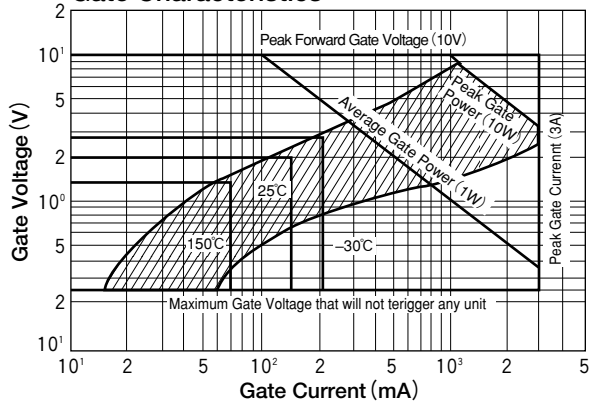


On-State Voltage max

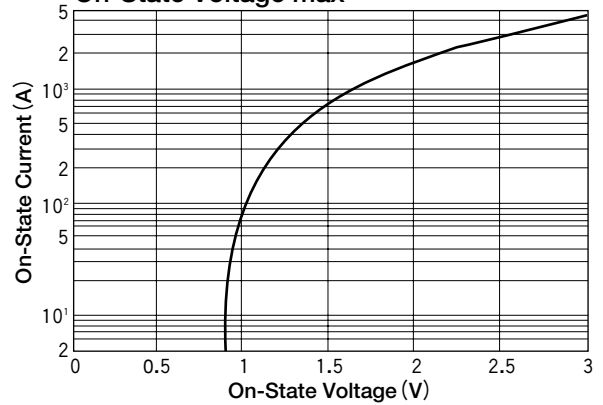


Average On-State Current Vs Power Dissipation (Single phase half wave)

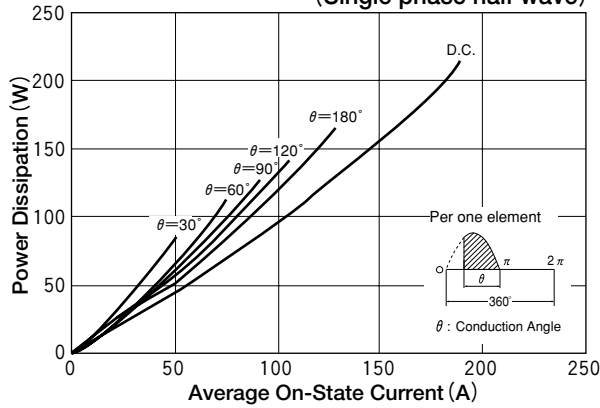

Average On-State Current Vs Maximum Allowable Case Temperature (Single phase half wave)

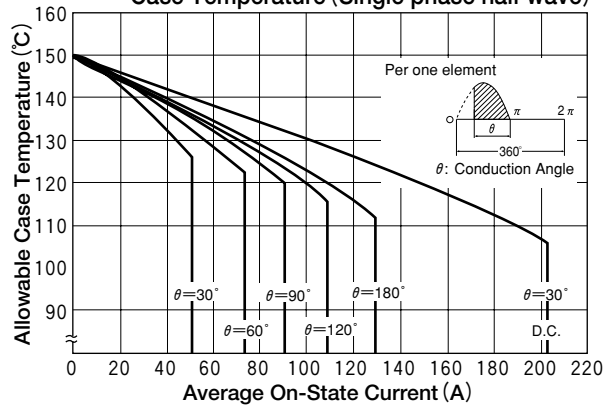

Surge On-State Current Rating (Non-Repetitive)

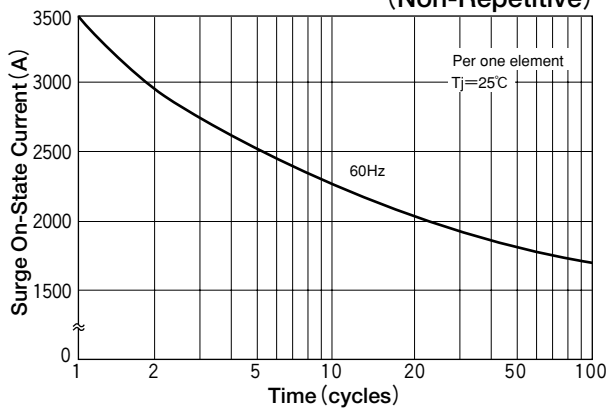

Transient Thermal Impedance

