

## QM50HY-2H

MEDIUM POWER SWITCHING USE  
INSULATED TYPE

QM50HY-2H





- **I<sub>C</sub>** Collector current ..... **50A**
- **V<sub>CEX</sub>** Collector-emitter voltage ..... **1000V**
- **h<sub>FE</sub>** DC current gain ..... **75**
- **Insulated Type**
- **UL Recognized**  
Yellow Card No. E80276 (N)  
File No. E80271

### APPLICATION

AC motor controllers, UPS, DC motor controllers, NC equipment, Welders

### OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

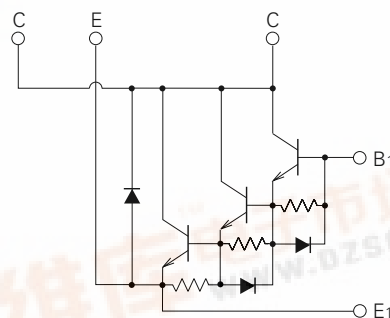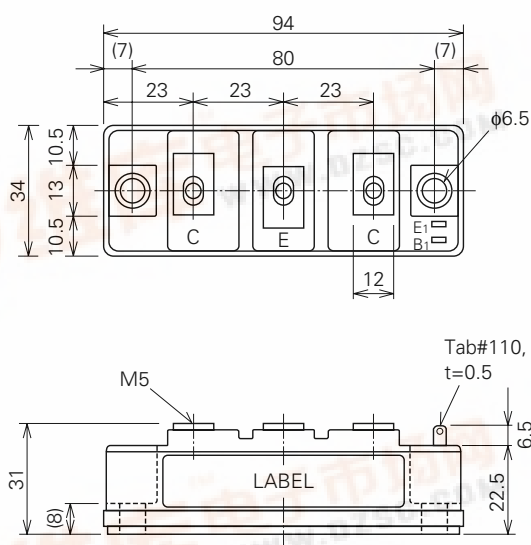

# QM50HY-2H

## MEDIUM POWER SWITCHING USE INSULATED TYPE

### ABSOLUTE MAXIMUM RATINGS (Tj=25°C, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
VCEX (SUS)	Collector-emitter voltage	IC=1A, VEB=2V	1000	V
VCEX	Collector-emitter voltage	VEB=2V	1000	V
VCBO	Collector-base voltage	Emitter open	1000	V
VEBO	Emitter-base voltage	Collector open	7	V
IC	Collector current	DC	50	A
-IC	Collector reverse current	DC (forward diode current)	50	A
PC	Collector dissipation	Tc=25°C	400	W
IB	Base current	DC	3	A
-ICSM	Surge collector reverse current (forward diode current)	Peak value of one cycle of 60Hz (half wave)	500	A
Tj	Junction temperature		-40~+150	°C
Tstg	Storage temperature		-40~+125	°C
Viso	Isolation voltage	Charged part to case, AC for 1 minute	2500	V
—	Mounting torque	Main terminal screw M5	1.47~1.96	N·m
			15~20	kg·cm
		Mounting screw M6	1.96~2.94	N·m
			20~30	kg·cm
—	Weight	Typical value	210	g

### ELECTRICAL CHARACTERISTICS (Tj=25°C, unless otherwise noted)


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
ICEX	Collector cutoff current	VCE=1000V, VEB=2V	—	—	1.0	mA
ICBO	Collector cutoff current	VCB=1000V, Emitter open	—	—	1.0	mA
IEBO	Emitter cutoff current	VEB=7V	—	—	200	mA
VCE (sat)	Collector-emitter saturation voltage	IC=50A, IB=1A	—	—	2.5	V
VBE (sat)	Base-emitter saturation voltage		—	—	3.5	V
-VCEO	Collector-emitter reverse voltage	-IC=50A (diode forward voltage)	—	—	1.8	V
hFE	DC current gain	IC=50A, VCE=2.8V/5V	75/100	—	—	—
ton	Switching time	VCC=600V, IC=50A, IB1=-IB2=1A	—	—	2.5	μs
ts			—	—	15	μs
tf			—	—	3.0	μs
Rth (j-c) O	Thermal resistance (junction to case)	Transistor part	—	—	0.31	°C/W
Rth (j-c) R		Diode part	—	—	1.2	°C/W
Rth (c-f)	Contact thermal resistance (case to fin)	Conductive grease applied	—	—	0.075	°C/W

# QM50HY-2H


MEDIUM POWER SWITCHING USE  
INSULATED TYPE

## PERFORMANCE CURVES


COMMON EMITTER OUTPUT  
CHARACTERISTICS (TYPICAL)

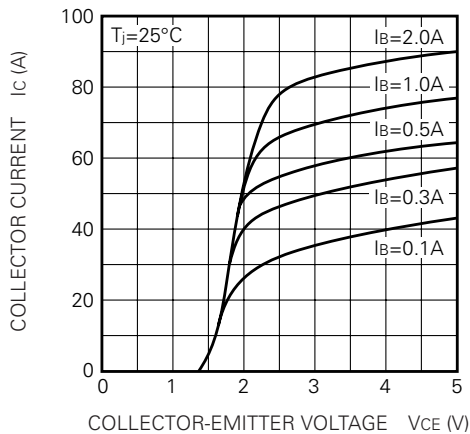


DC CURRENT GAIN VS.  
COLLECTOR CURRENT (TYPICAL)

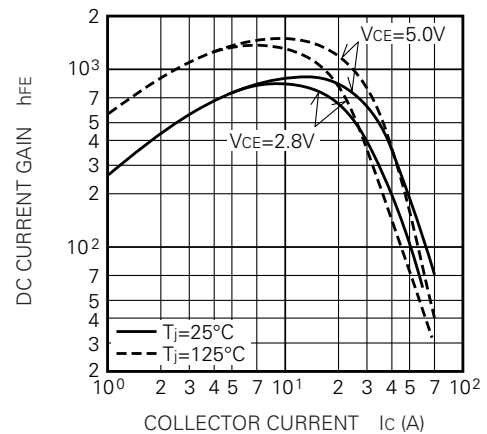


COMMON EMITTER INPUT  
CHARACTERISTIC (TYPICAL)

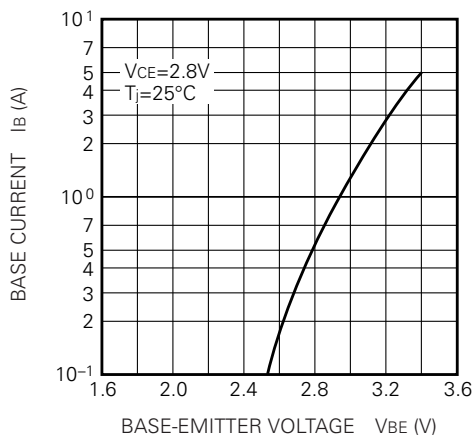


SATURATION VOLTAGE  
CHARACTERISTICS (TYPICAL)

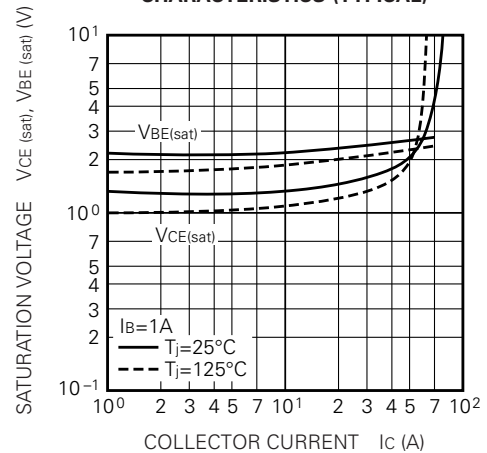

COLLECTOR-EMITTER SATURATION  
VOLTAGE (TYPICAL)

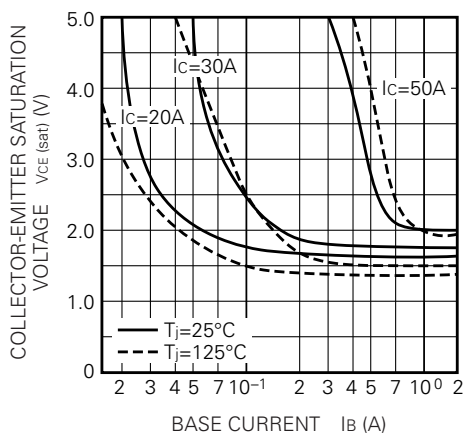


SWITCHING TIME VS. COLLECTOR  
CURRENT (TYPICAL)

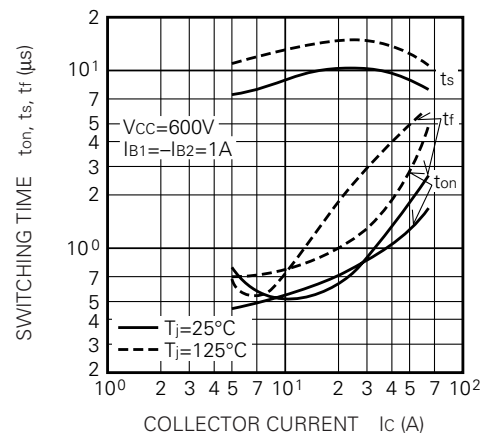


# QM50HY-2H

MEDIUM POWER SWITCHING USE  
INSULATED TYPE


SWITCHING TIME VS. BASE  
CURRENT (TYPICAL)

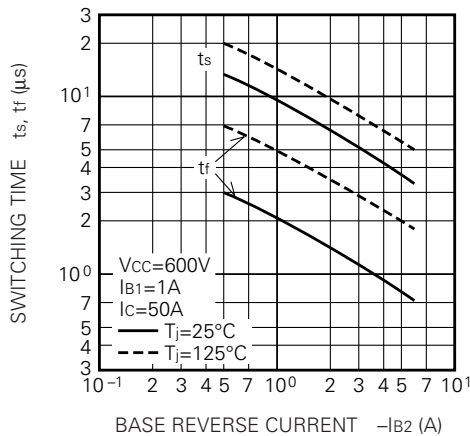


REVERSE BIAS SAFE OPERATING AREA

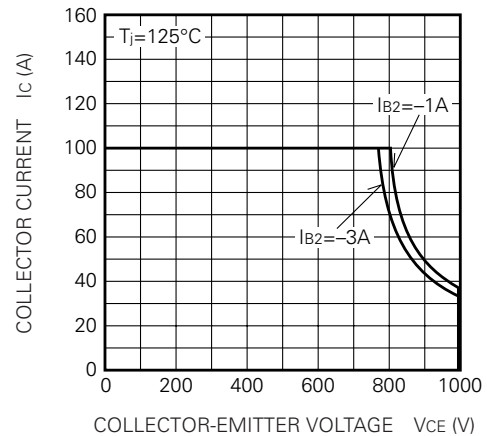


FORWARD BIAS SAFE OPERATING AREA

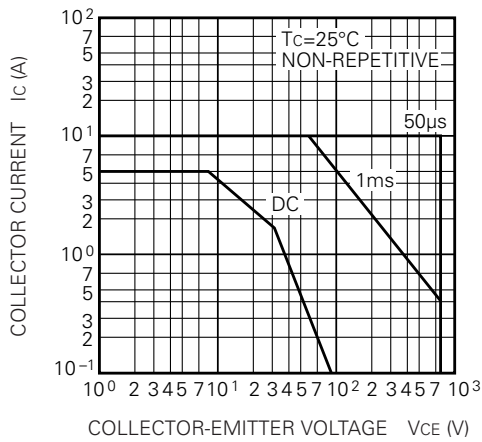


DERATING FACTOR OF F. B. S. O. A.

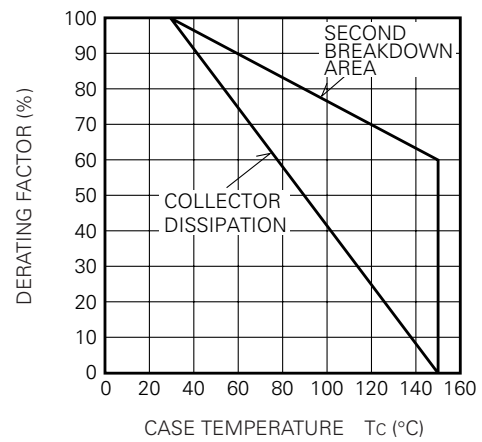

TRANSIENT THERMAL IMPEDANCE  
CHARACTERISTIC (TRANSISTOR)

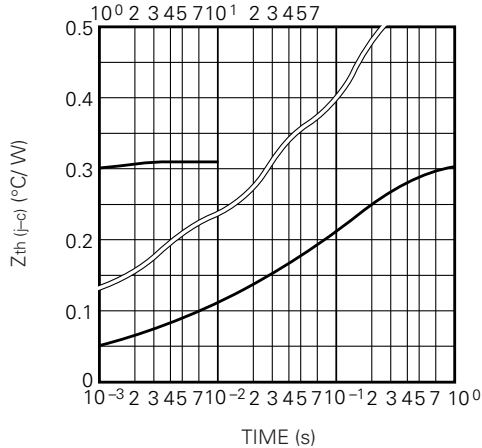


REVERSE COLLECTOR CURRENT VS.  
COLLECTOR-EMITTER REVERSE  
VOLTAGE (DIODE FORWARD  
CHARACTERISTICS) (TYPICAL)

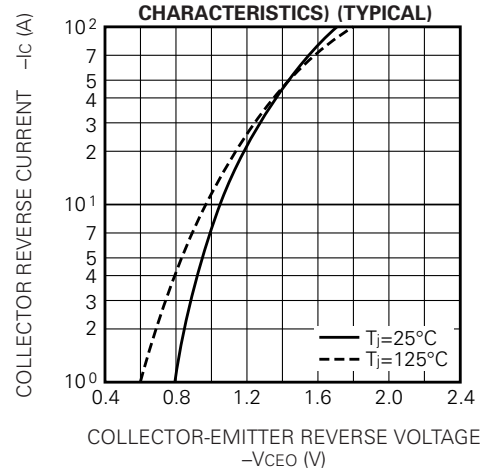


# QM50HY-2H

MEDIUM POWER SWITCHING USE  
INSULATED TYPE

**RATED SURGE COLLECTOR REVERSE CURRENT  
(DIODE FORWARD SURGE CURRENT)**

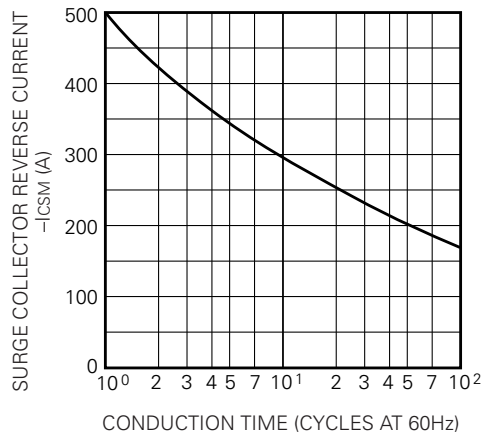

**REVERSE RECOVERY CHARACTERISTICS  
OF FREE-WHEEL DIODE (TYPICAL)**

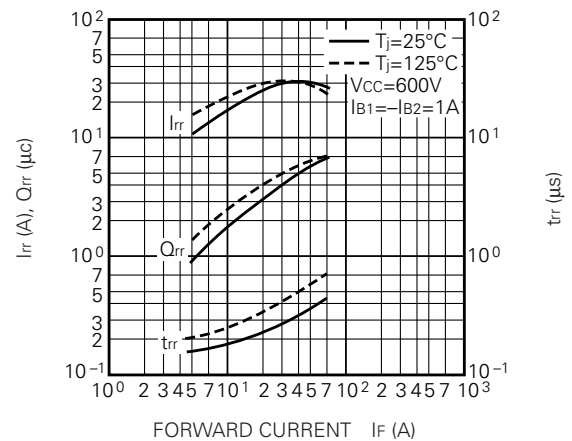

**TRANSIENT THERMAL IMPEDANCE  
CHARACTERISTIC (DIODE)**

