

SURFACE MOUNT LED LAMP SUPER BRIGHT 1206 (Reverse Mount)

QTL652C-R Red

QTL652C-E Orange

QTL652C-O Yellow-Orange


QTL652C-Y Yellow

QTL652C-AG Yellow-Green

QTL652C-IG True Green


QTL652C-IB Blue

PACKAGE DIMENSIONS

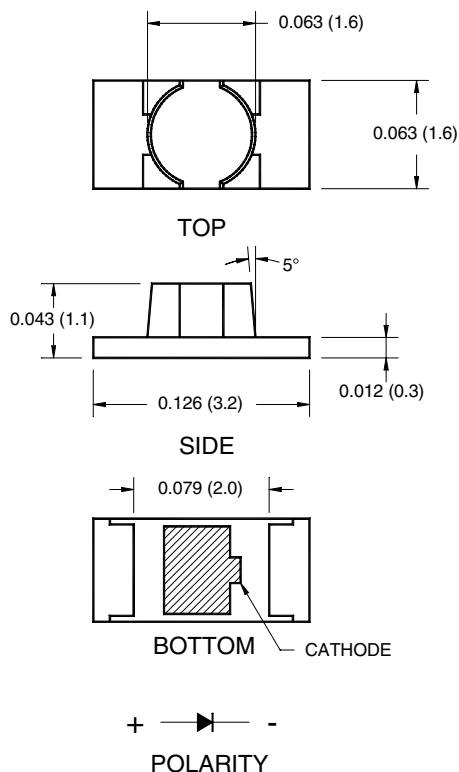

NOTE:

Dimensions for all drawings are in inches (mm).



APPLICATIONS

- Keypad backlighting
- Push-button backlighting
- LCD backlighting

DESCRIPTION

These surface mount chip LEDs are designed to fit industry standard footprint. They are reverse mountable and designed to emit light through a small cut-out hole in the PC board.

FEATURES

- Small footprint - 3.2(L) X 1.6(W) X 1.1(H) mm
- AlInGaP technology for -R, -E, -O, -Y and -AG
- InGaN/SiC technology for -IG and -IB
- Wide viewing angle of 30°
- Water clear optics
- Moisture-proof packaging
- Available in 0.315" (8mm) width tape on 7" (178mm) diameter reel; 2,000 units per reel

SURFACE MOUNT LED LAMP

SUPER BRIGHT 1206 (Reverse Mount)

QTLP652C-R Red

QTLP652C-E Orange

QTLP652C-O Yellow-Orange

QTLP652C-Y Yellow

QTLP652C-AG Yellow-Green

QTLP652C-IG True Green

QTLP652C-IB Blue

ABSOLUTE MAXIMUM RATINGS (T_A =25°C Unless otherwise specified)

Parameter	Symbol	QTLP652C					Units
		-R	-E	-O	-Y	-AG	
Continuous Forward Current	I _F	30	30	30	25	30	mA
Peak Forward Current (f = 1.0 KHz, Duty Factor = 1/10)	I _{FM}	160	160	160	120	160	mA
Reverse Voltage	V _R	5	5	5	5	5	V
Power Dissipation	P _D	72	72	72	60	72	mW
Operating Temperature	T _{OPR}	-40 to +85					°C
Storage Temperature	T _{STG}	-40 to +90					°C
Lead Soldering Time	T _{SOL}	260 for 5 sec					°C

ABSOLUTE MAXIMUM RATINGS (T_A =25°C Unless otherwise specified)

Parameter	Symbol	QTLP652C		Units
		-IB	-IG	
Continuous Forward Current	I _F	30	30	mA
Peak Forward Current (f = 1.0 KHz, Duty Factor = 1/10)	I _{FM}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	120	120	mW
Operating Temperature	T _{OPR}	-40 to +85		°C
Storage Temperature	T _{STG}	-40 to +90		°C
Lead Soldering Time	T _{SOL}	260 for 5 sec		°C

SURFACE MOUNT LED LAMP

SUPER BRIGHT 1206 (Reverse Mount)

QTLP652C-R Red

QTLP652C-E Orange

QTLP652C-O Yellow-Orange

QTLP652C-Y Yellow

QTLP652C-AG Yellow-Green

QTLP652C-IG True Green

QTLP652C-IB Blue

ELECTRICAL / OPTICAL CHARACTERISTICS (T_A = 25°C)

Part Number	Symbol	QTLP652C					Condition
		-R	-E	-O	-Y	-AG	
Luminous Intensity (mcd)	I _V	15	15	15	15	10	I _F = 20mA
Minimum		40	40	40	40	15	
Typical							
Forward Voltage (V)	V _F	2.4	2.4	2.4	2.4	2.4	I _F = 20mA
Maximum		2.0	2.0	2.0	2.0	2.0	
Typical							
Wavelength (nm)	λ _P	630	620	610	590	575	I _F = 20mA
Peak		624	615	605	589	573	
Dominant	λ _D						
Spectral Line Half Width (nm)	Δλ	20	18	18	15	20	I _F = 20mA
Viewing Angle (°)	2Θ _{1/2}	130	130	130	130	130	I _F = 20mA

ELECTRICAL / OPTICAL CHARACTERISTICS (T_A = 25°C)

Part Number	Symbol	QTLP652C		Condition
		-IB	-IG	
Luminous Intensity (mcd)	I _V	15	35	I _F = 20mA
Minimum		25	60	
Typical				
Forward Voltage (V)	V _F	4.0	4.0	I _F = 20mA
Maximum		3.5	3.5	
Typical				
Wavelength (nm)	λ _P	465	520	I _F = 20mA
Peak		470	525	
Dominant	λ _D			
Spectral Line Half Width (nm)	Δλ	25	35	I _F = 20mA
Viewing Angle (°)	2Θ _{1/2}	130	130	I _F = 20mA

QTLP652C-R Red

QTLP652C-E Orange

QTLP652C-O Yellow-Orange

QTLP652C-Y Yellow

QTLP652C-AG Yellow-Green

QTLP652C-IG True Green

QTLP652C-IB Blue

TYPICAL PERFORMANCE CURVES (QTLP652C-R, -E, -O, -Y and -AG)

Fig. 1 Forward Current vs. Forward Voltage

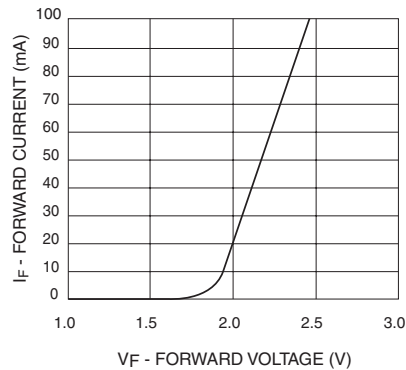


Fig. 2 Relative Luminous Intensity vs. DC Forward Current

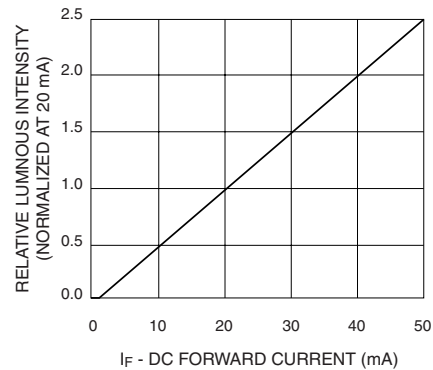


Fig. 3 Relative Intensity vs. Peak Wavelength

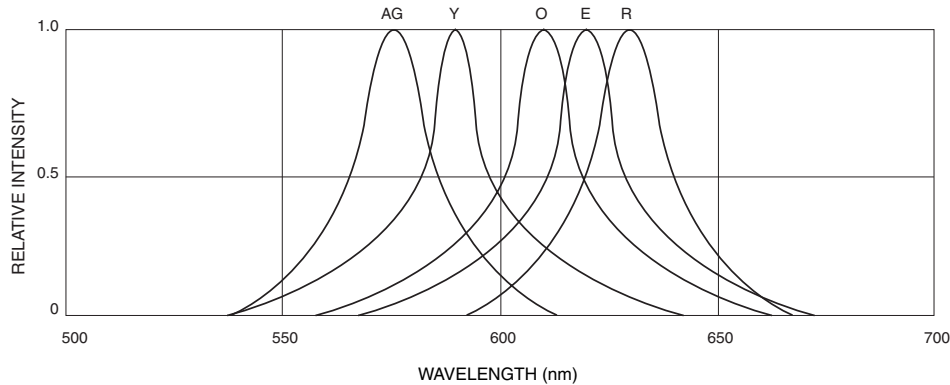


Fig.4 Radiation Diagram


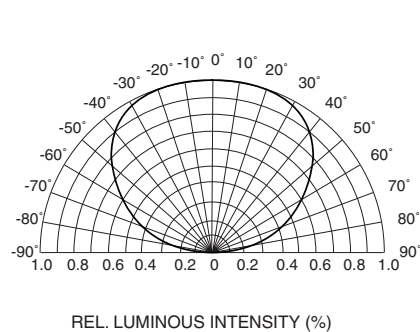


Fig.5 Maximum Forward Current vs. Ambient Temperature

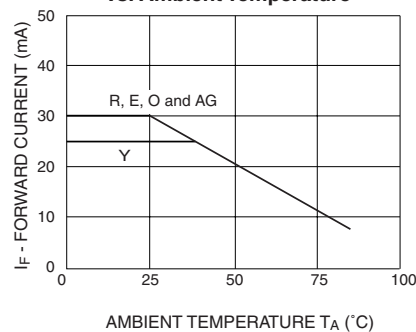

QTLP652C-R Red

QTLP652C-E Orange

QTLP652C-O Yellow-Orange

QTLP652C-Y Yellow

QTLP652C-AG Yellow-Green

QTLP652C-IG True Green

QTLP652C-IB Blue

TYPICAL PERFORMANCE CURVES (QTLP652C-IG and IB)

Fig. 1 Forward Current vs. Forward Voltage

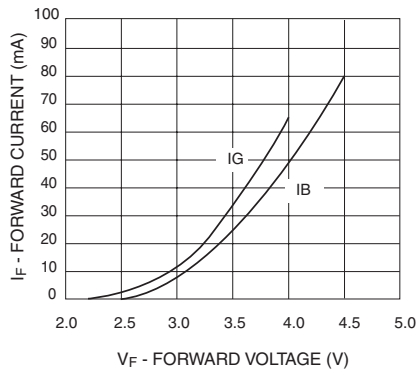


Fig. 2 Relative Luminous Intensity vs. DC Forward Current

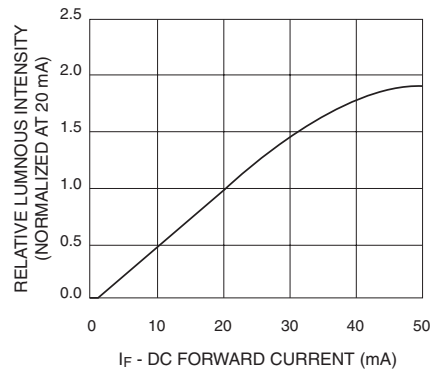


Fig. 3 Relative Intensity vs. Peak Wavelength

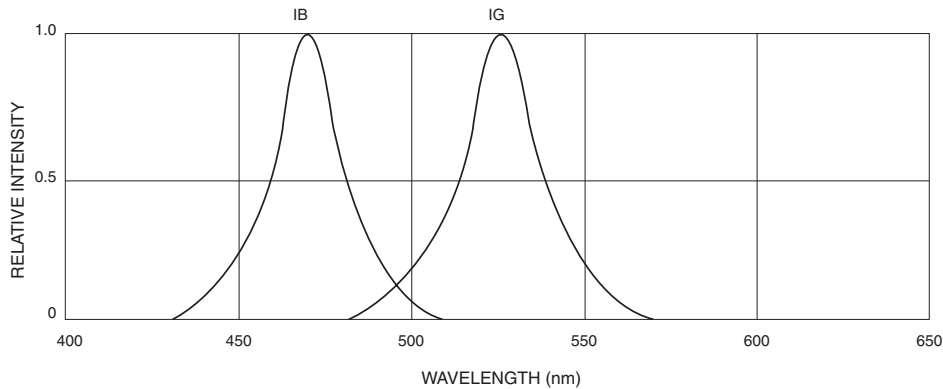


Fig.4 Radiation Diagram


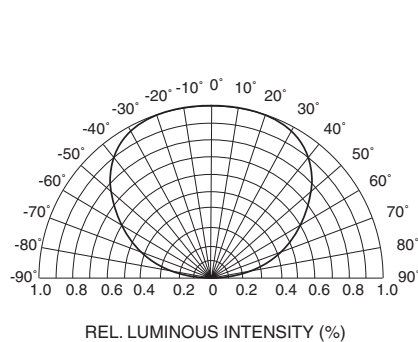


Fig.5 Maximum Forward Current vs. Ambient Temperature

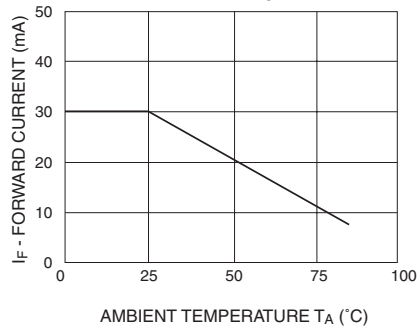

SURFACE MOUNT LED LAMP SUPER BRIGHT 1206 (Reverse Mount)

QTLP652C-R Red

QTLP652C-E Orange

QTLP652C-O Yellow-Orange


QTLP652C-Y Yellow

QTLP652C-AG Yellow-Green


QTLP652C-IG True Green

QTLP652C-IB Blue

RECOMMENDED PRINTED CIRCUIT BOARD PATTERN

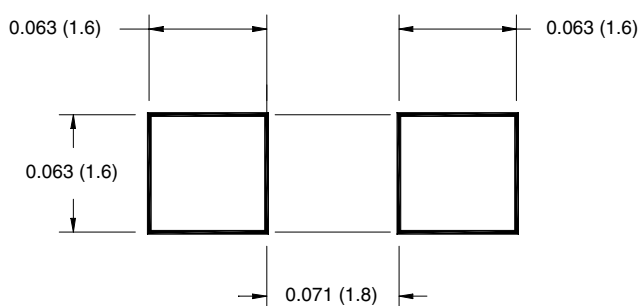

RECOMMENDED IR REFLOW SOLDERING PROFILE

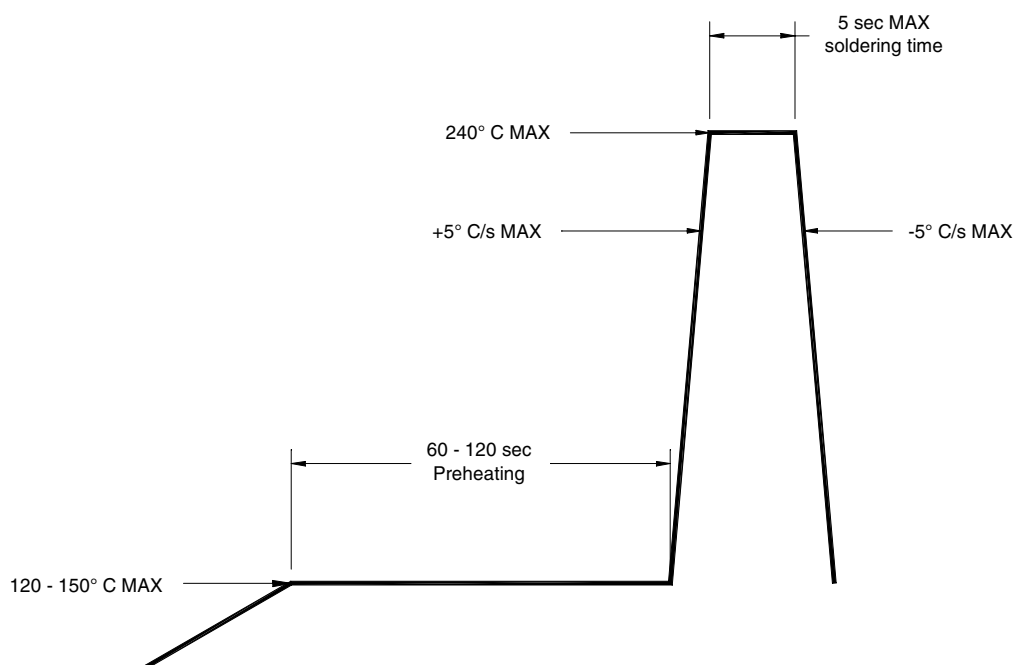

SURFACE MOUNT LED LAMP SUPER BRIGHT 1206 (Reverse Mount)

QTLP652C-R Red

QTLP652C-E Orange

QTLP652C-O Yellow-Orange


QTLP652C-Y Yellow

QTLP652C-AG Yellow-Green

QTLP652C-IG True Green

QTLP652C-IB Blue

TAPE AND REEL DIMENSIONS

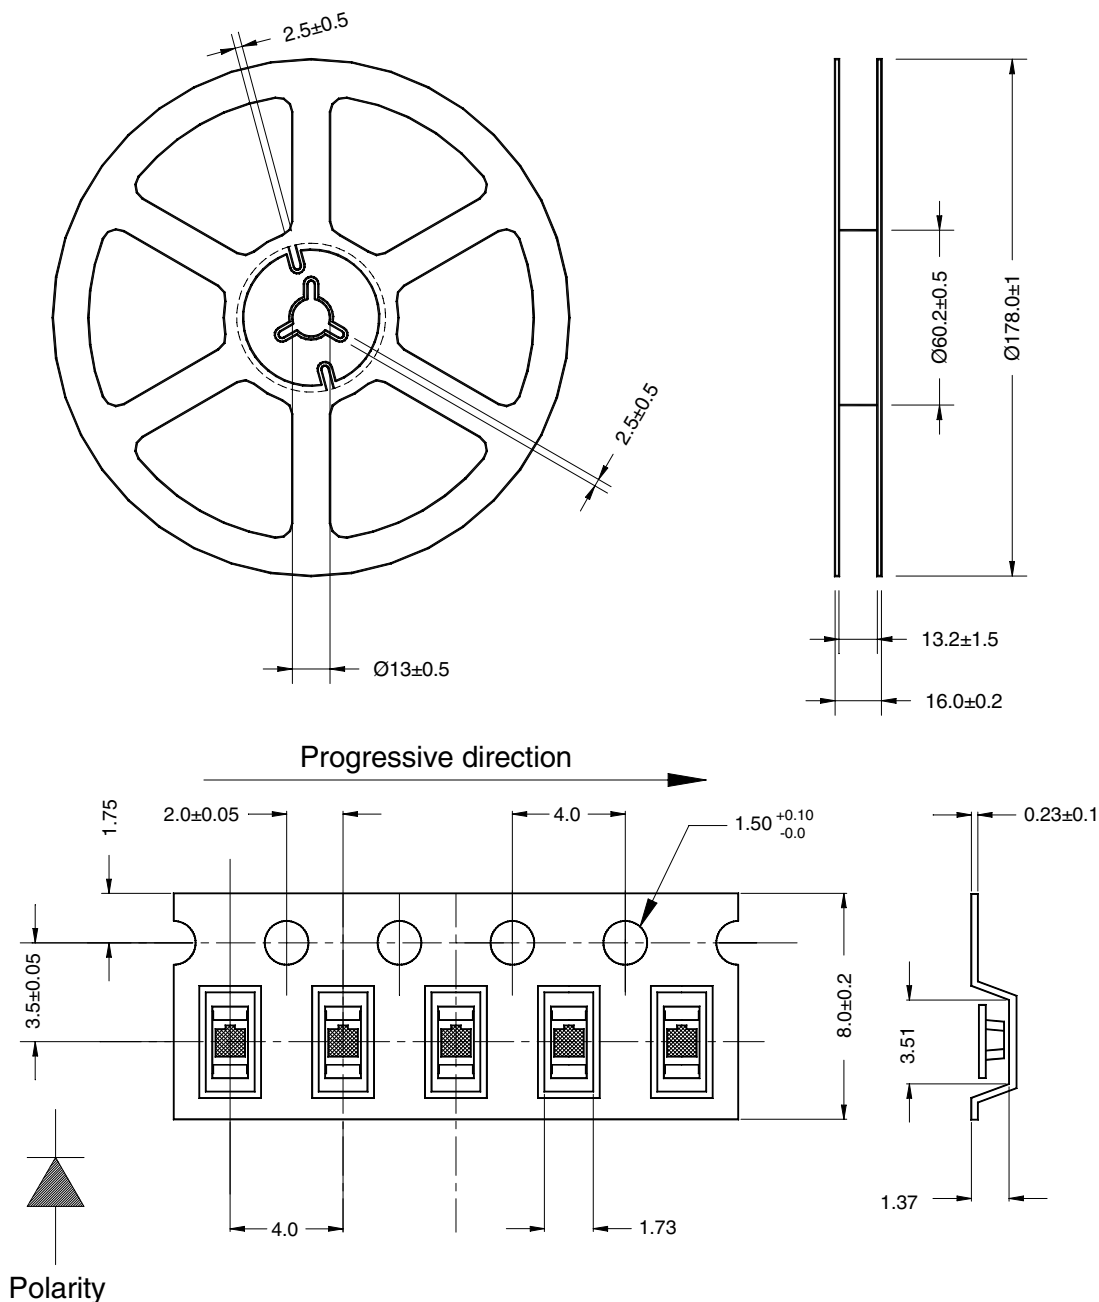

Dimensional tolerance is $\pm 0.1\text{mm}$ unless otherwise specified

Angle: ± 0.5

Unit: mm

SURFACE MOUNT LED LAMP

SUPER BRIGHT 1206 (Reverse Mount)

QTLP652C-R Red

QTLP652C-E Orange

QTLP652C-O Yellow-Orange

QTLP652C-Y Yellow

QTLP652C-AG Yellow-Green

QTLP652C-IG True Green

QTLP652C-IB Blue

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com