

HAMAMATSU

PHOTOMULTIPLIER TUBES R6427, R7056

**Fast time response, For scintillation counting and
high energy physics, R6427: Borosilicate glass, R7056: UV glass**

GENERAL

Parameter		R6427	R7056	Unit
Spectral Response		300 to 650	185 to 650	nm
Wavelength of Maximum Response		420		nm
Photocathode	Material	Bialkali		—
	Minimum Effective Area	25		mm dia.
Window Material		Borosilicate glass	UV glass	—
Dynode	Structure	Linear focused		—
	Number of Stages	10		—
Base		14-pin glass base		—
Suitable Socket		E678-14C (supplied)		—

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	2000	Vdc
	Between Anode and Last Dynode	350	Vdc
Average Anode Current		0.2	mA
Ambient Temperature		-80 to +50	°C

CHARACTERISTICS (at 25°C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous (2856K)	60	95	—	μA/lm
	Radiant at 420nm	—	88	—	mA/W
	Blue (CS-5-58 filter)	—	11.0	—	μA/lm-b
Anode Sensitivity	Luminous (2856K)	—	475	—	A/lm
	Radiant at 420nm	—	4.4×10^5	—	A/W
Gain		—	5×10^6	—	—
Anode Dark Current (after 30min. storage in darkness)		—	10	200	nA
Time Response	Anode Pulse Rise Time	—	1.7	—	ns
	Electron Transit Time	—	16	—	ns
	Transit Time Spread (FWHM)	—	500	—	ps
Pulse Linearity (at ±2% deviation)		—	10 (100)	—	mA

NOTE : Anode characteristics are measured with the voltage distribution ratio A shown below.

() : Pulse linearity is measured with the voltage distribution ratio B shown below.

VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	P
Ratio A	4	1	1.5	1	1	1	1	1	1	1	1	1
Ratio B (Tapered)	4	1	1.5	1	1	1	1.2	1.5	2	3.3	3	
Capacitors (μF)							0.01	0.02	0.02	0.04	0.06	

Supply Voltage: 1500Vdc, K: Cathode, DY: Dynode, P: Anode

PHOTOMULTIPLIER TUBES R6427, R7056

Figure 1: Typical Spectral Response

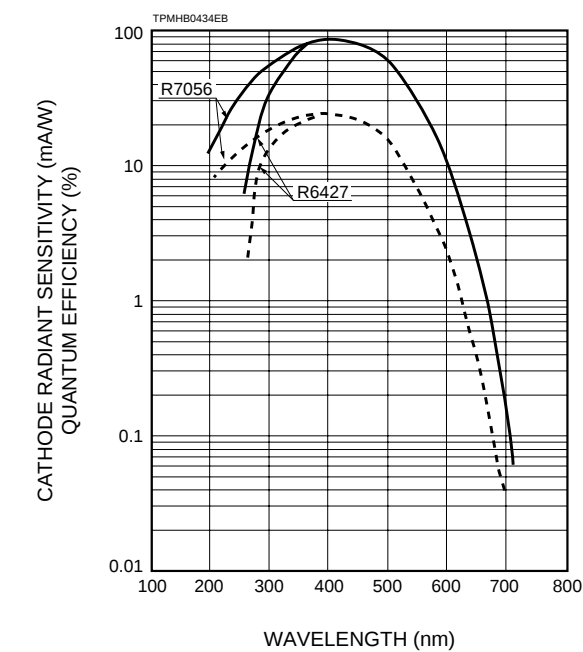


Figure 2: Typical Gain

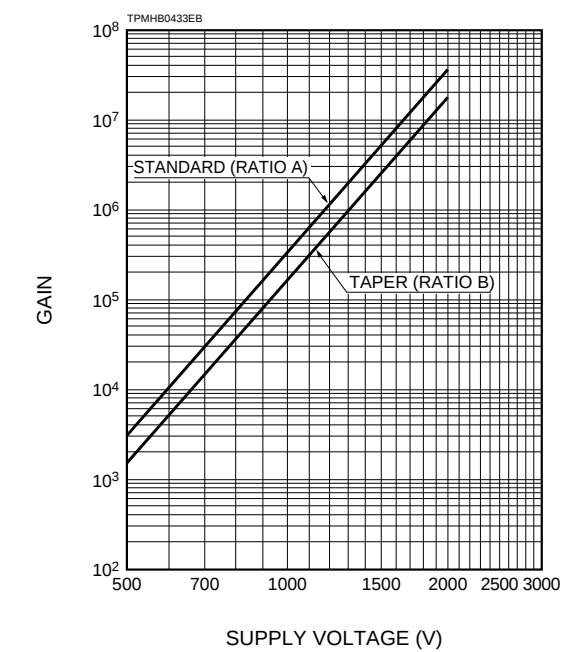


Figure 3: Typical Pulse Height Distribution (P.H.D.)

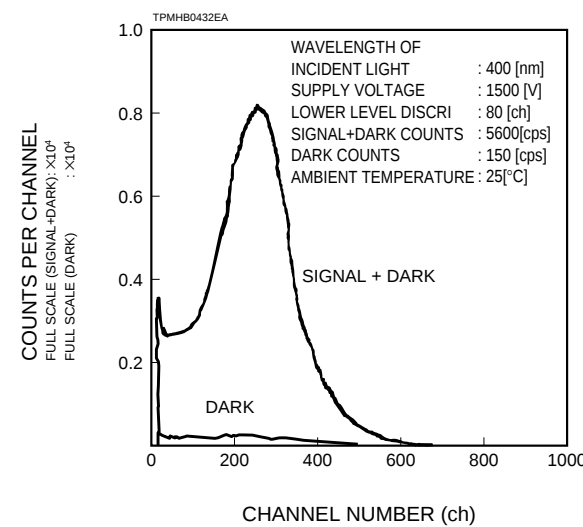


Figure 4: Time Response

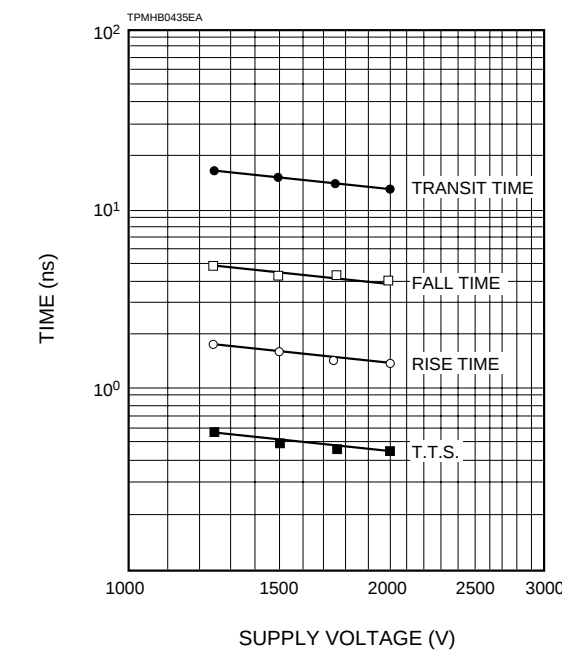


Figure 5: Anode Output Waveform

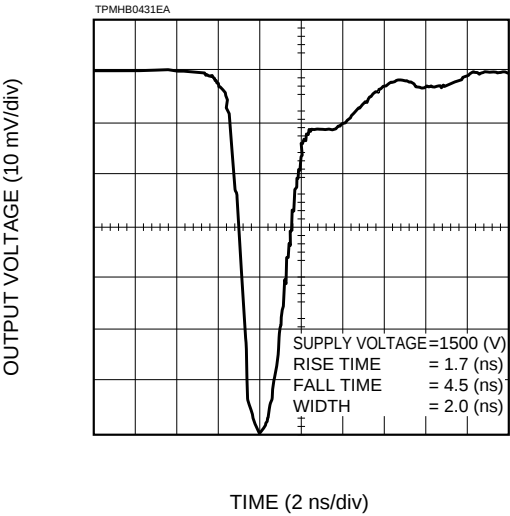


Figure 6: Transit Time Spread (T.T.S.)


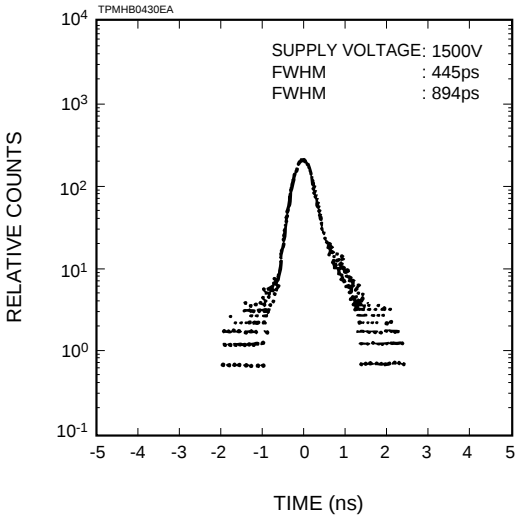



Figure 7: Dimensional Outline and Basing Diagram (Unit: mm)

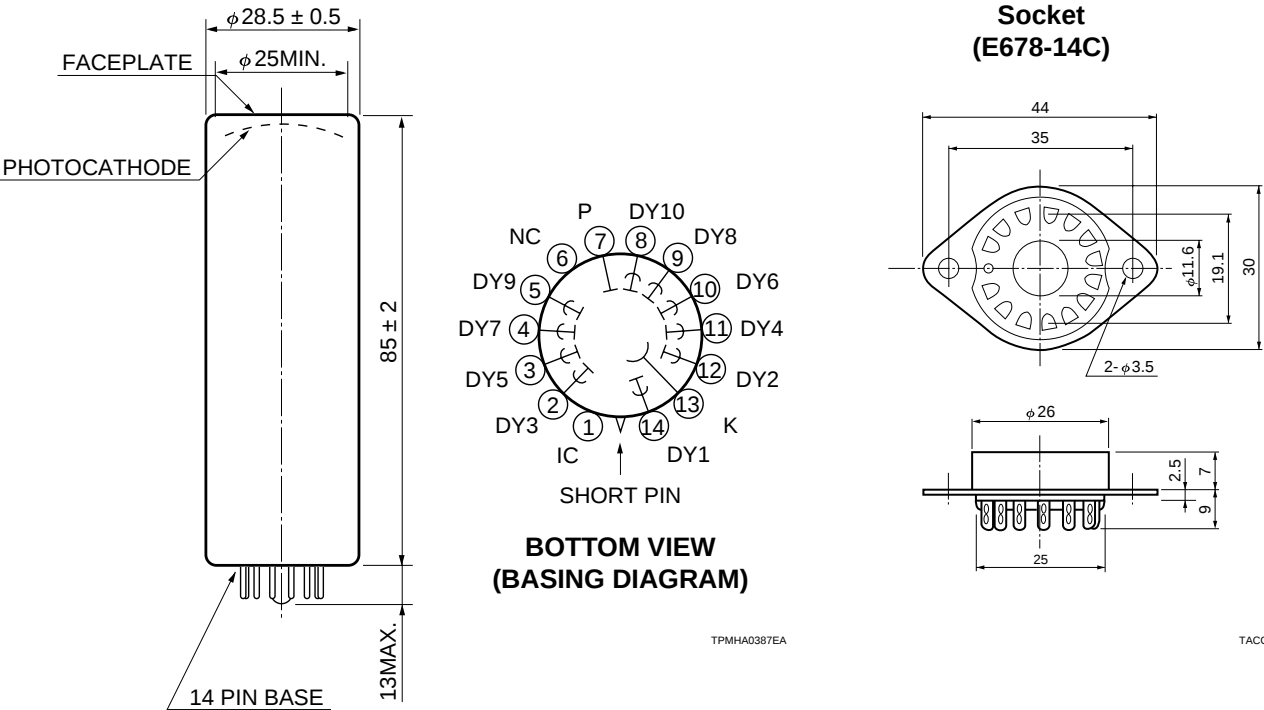

PHOTOMULTIPLIER TUBES R6427, R7056


[ACCESSORIES]

●D-type Socket Assembly E2624-14 (for RATIO A)

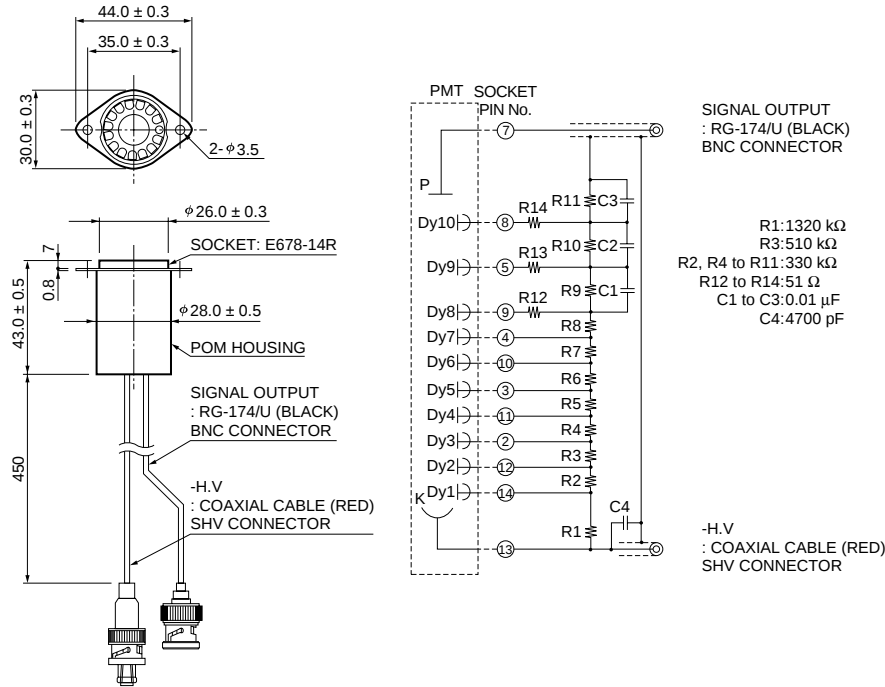

TACCA0082EC

●D-type Socket Assembly E2624-04 (for RATIO B)

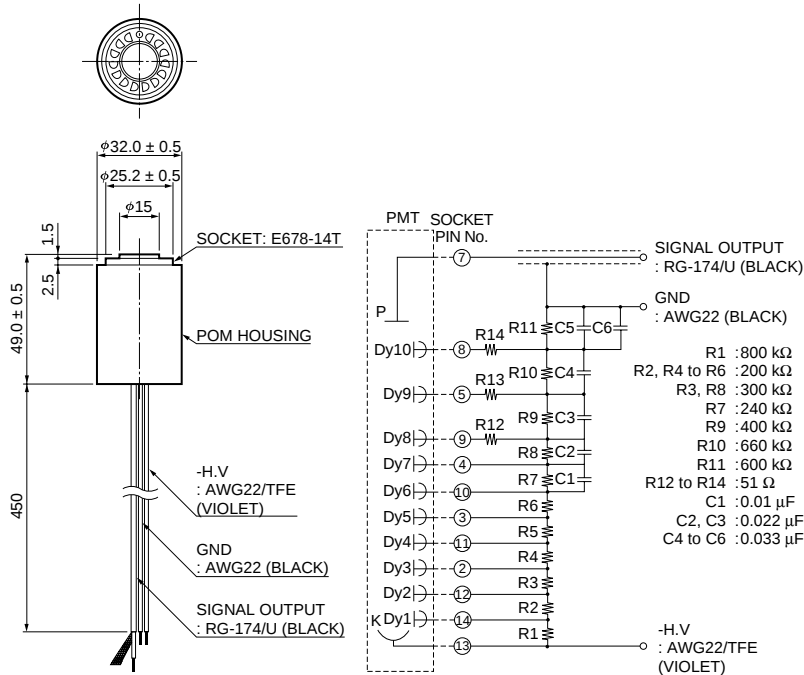

TACCA0084EC

HAMAMATSU

HOME PAGE URL <http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Electron Tube Center

314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: 44(20)8-367-3560, Fax: 44(20)8-367-6384

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741

TPMH1187E04