
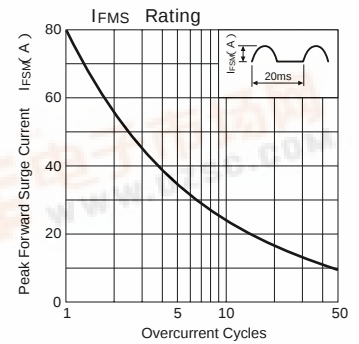






Bridge Diodes (Ultra-Fast-Recovery)

Parameter Type No.		Absolute Maximum Ratings					Electrical Characteristics (Ta = 25)							Others	
		V _{RM} (V)	I _R AV (A) With Heatsink	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°)	T _{stg} (°)	V _F (V) max per element	I _R (mA) V _R = V _{RM} max per element	I _R (H) (mA) V _R = V _{RM} , Ta = 100 max per element	t _{rr} (ns) I _F /I _{RP} (mA)	t _{rr} (ns) I _F /I _{RP} (mA)	R _{th} (j-c) (° / W)	Mass (g)	Fig.	
RBA-402L		200	4.0	80	- 40 to + 150	0.98	2.0	0.05	0.1	40	100/100	30	5.0	4.05	Ⓐ
RBV-602L			6.0	100		1.0	3.0	0.25	1.0	50	35	100/200	30	3.0	6.45

RBA-402L



RBV-602L

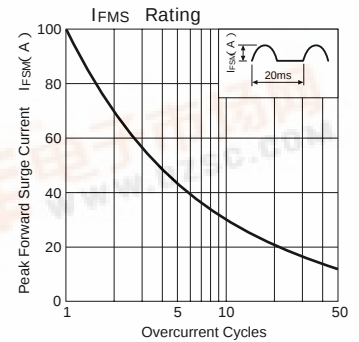

External Dimensions (Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. Ⓐ

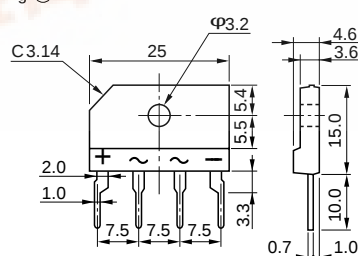


Fig. Ⓑ

