



LTCC Directional Coupler, 30dB, 200W

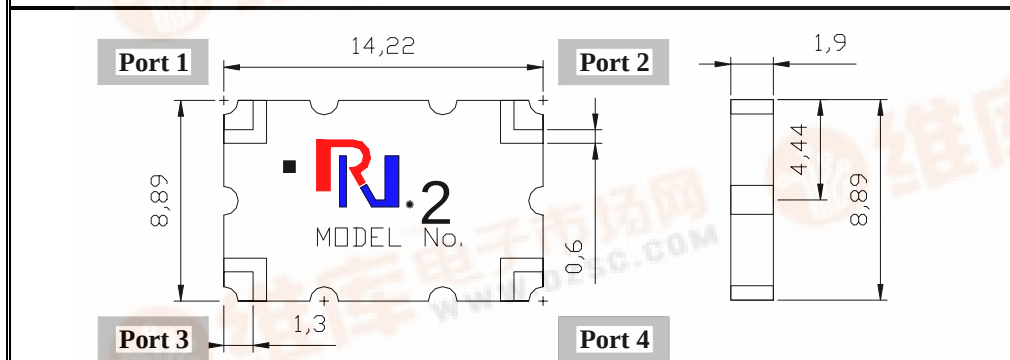
RCP2150M30 is LTCC Directional Coupler with Gold (Au) Plated in easy to surface mount for wireless communication, 1900~2300MHz.

Product Characteristics

- Low Loss
- High Reliability
- Good thermal management

Electrical Specifications

Frequency (MHz)	Coupling (dB)	Insertion Loss (dB)	Directivity (dB)	VSWR (Max)	Power Cap. (Watts)	Temp. range (°C)
1900~2300	30 ± 1.5	0.2	18	1.2	200	-55 ~ +85

Mechanical Outline**Pin Configuration**

Port 1	Input
Port 2	Output
Port 3	Coupled
Port 4	Isolated

Performance