




SUHNER® COAXIAL CABLE

TYPE: RG 58 C/U

Item: 22510015

Cable design



1	Inner conductor	Stranded tinned copper	19x 0.187 mm	∅ 0.935 mm
2	Dielectric	Solid polyethylene (PE)		∅ 2.95 mm
3	Outer conductor	Tinned copper braid	96% coverage	∅ 3.60 mm
4	Jacket	Non-migratory PVC	bk (RAL 9005)	∅ 4.95 mm
	Print on jacket	SUHNER SWITZERLAND	RG 58 C/U	50 Ohm

Electrical data

Typ. operating frequency		(GHz)	≤ 1
Impedance		(Ω)	50 ± 2
Capacitance		(pF/m)	100.7
Relative signal propagation		(%)	66.3
Signal delay		(ns/m)	5.03
Phase stability	vs temperature	(°/GHz/m)	-
	vs bending	(°/GHz)	-
Insulation resistance		(MΩm)	> 10 ⁸
Test voltage	50 Hz / 1 min.	(kV _{rms})	5
Max. operating voltage	at sea level	(kV _{rms})	2.5
Typ. DC resistance	inner conductor	(Ω/km)	34.5
	outer conductor	(Ω/km)	13.8
Typ. screening effectiveness	1 ... 300 MHz	(dB)	> 35

General data

Cable specification	cable design according to	MIL-C-17/28
Temperature range	operating	(°C) -40...+85
	installation	(°C) -20...+70
Flame propagation	IEC 332-1	n/a
Halogen content	IEC 754	n/a
Typ. Weight		(kg/100m) 3.7
Min. bending radius	for bending once	(mm) 25
	for repeated bendings	(mm) 50
	for flexible applications	(mm) 100

Suitable connectors

Cable group U7

For details refer to the "SUHNER® coaxial connector catalogue" or contact your nearest HUBER+SUHNER representative


SUHNER® COAXIAL CABLE

TYPE: RG 58 C/U

Item: 22510015


Cable attenuation

Nominal values @ +25 °C ambient temperature

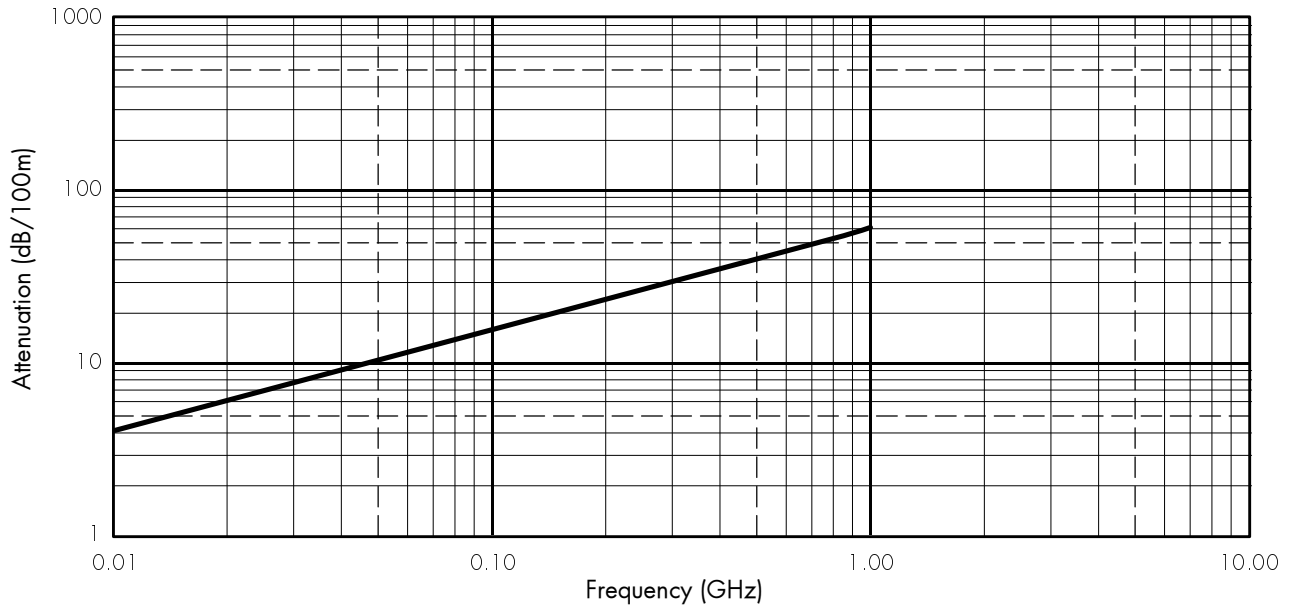

C.W. power handling capability

Maximum values @ +40 °C ambient temperature and sea level, no solar load

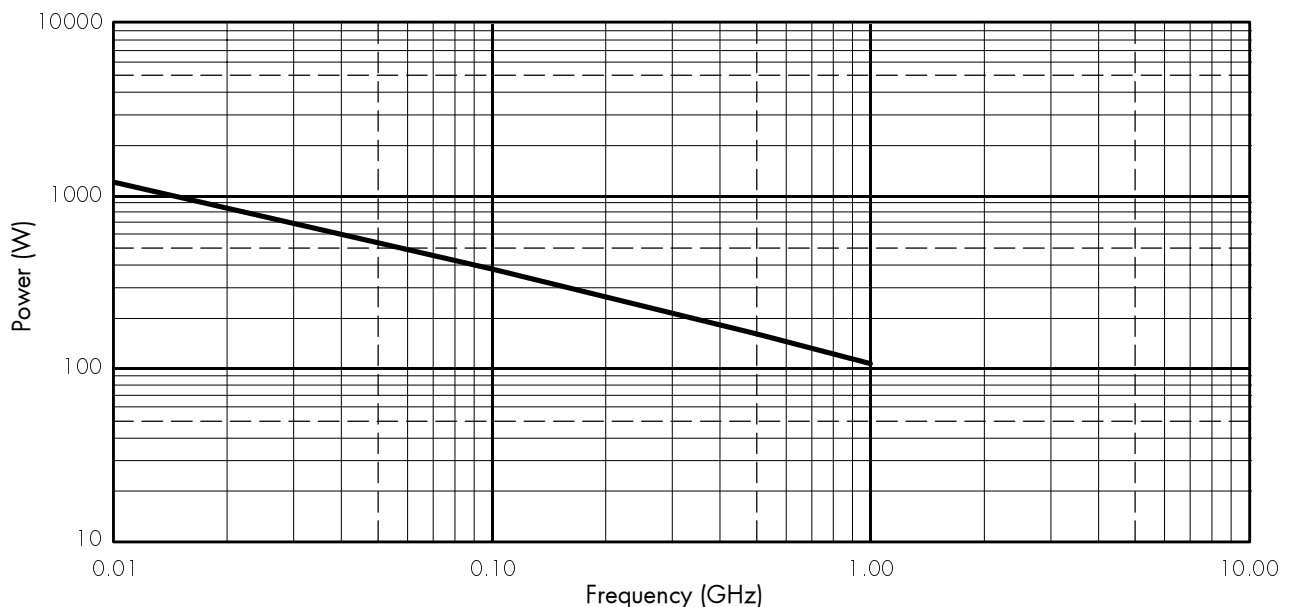

WAIVER!

While the information contained in this folder has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use of purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.



HUBER+SUHRNER

HUBER+SUHRNER AG
Coaxial Cable Division
CH-9100 Herisau, Switzerland
Tel.: +41 (0)71 353 41 11
Fax: +41 (0)71 353 45 90
e-mail: sales.hfk@hubersuhner.com
www.hubersuhner.com

Document No.: 01.03.0491

Issue No.: 2

Supersedes: 0206/2, 0491/1

Uncontrolled copy

Issued/Checked/Released:

Last amended:

20.10.1999/486-HJ

Temperature range

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com