


# RGL 34A...RGL 34M

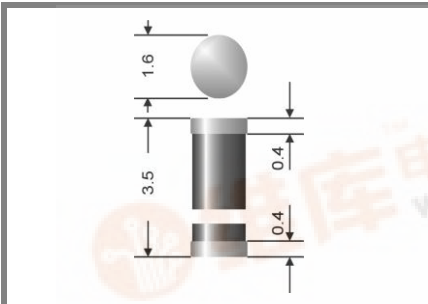

Surface mount diode

## Fast silicon rectifier diodes

### RGL 34A...RGL 34M

Forward Current: 0,5 A

Reverse Voltage: 50 to 1000 V

### Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0
- red ring denotes " cathode " and " fast switching rectifier family "
- ring denotes " repetitive peak reverse voltage "

### Mechanical Data


- Plastic case MiniMelf / SOD-80 / DO-213AA
- Weight approx.: 0,04 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 10000, 2500 pieces per reel

- 1) Max. temperature of the terminals  $T_T = 75$  °C
- 2)  $I_F = 0,5$  A,  $T_j = 25$  °C
- 3)  $T_A = 25$  °C
- 4) Mounted on P.C. board with 25 mm<sup>2</sup> copper pads at each terminal

Type	Polarity color band	Repetitive peak reverse voltage $V_{RRM}$ V	Surge peak reverse voltage $V_{RSM}$ V	Maximum forward voltage $T_j = 25$ °C $I_F = 0,5$ A $V_F^{2)}$ V	Maximum reverse recovery time $I_F = 0,5$ A $I_R = 1$ A $I_{RR} = 0,25$ A $t_{rr}$ ns
RGL 34A	gray	50	50	1,3	150
RGL 34B	red	100	100	1,3	150
RGL 34D	orange	200	200	1,3	150
RGL 34G	yellow	400	400	1,3	150
RGL 34J	green	600	600	1,3	250
RGL 34K	blue	800	800	1,3	500
RGL 34M	violet	1000	1000	1,3	500

Absolute Maximum Ratings		$T_c = 25$ °C, unless otherwise specified	
Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_T = 75$ °C <sup>1)</sup>	0,5	A
$I_{FRM}$	Repetitive peak forward current $f > \text{Hz}$	-	A
$I_{FSM}$	Peak fwd. surge current 60 Hz half sinus-wave <sup>3)</sup>	10	A
$I^2t$	Rating for fusing, $t < 10$ ms <sup>3)</sup>	0,5	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient <sup>4)</sup>	150	K/W
$R_{thT}$	Max. thermal resistance junction to terminals	70	K/W
$T_j$	Operating junction temperature	- 50 ... + 175	°C
$T_s$	Storage temperature	- 50 ... + 175	°C



Characteristics		$T_c = 25$ °C, unless otherwise specified	
Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_j = 25$ °C; $V_R = V_{RRM}$ $T_j = 125$ °C; $V_R = V_{RRM}$	<5 <50	µA µA
$C_j$	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $di_F/dt = A/ms$ )	-	µC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $I_R = mA$ ; $T_j =$ °C; inductive load switched off)	-	mJ

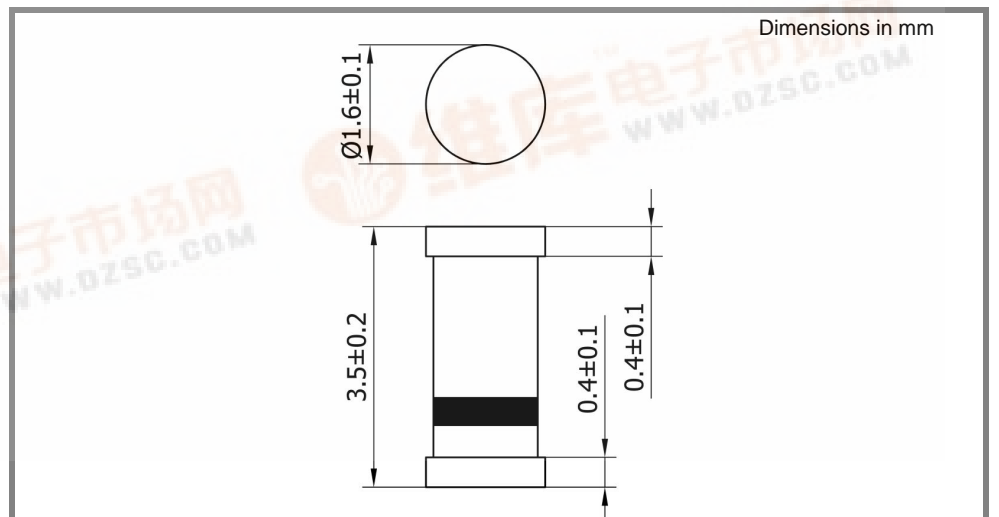

case: MiniMelf / DO-213AA



# RGL 34A...RGL 34M

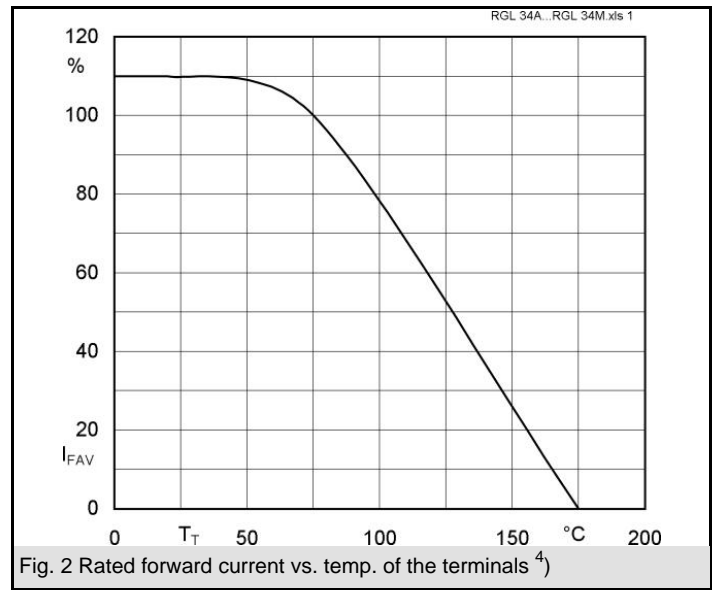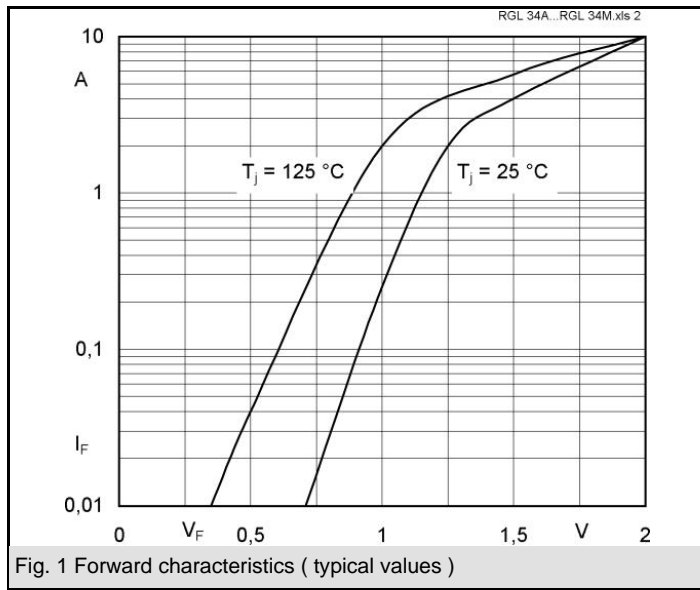

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)