



RGP10A THRU RGP10M


SINTERED GLASS PASSIVATED JUNCTION FAST RECOVERY RECTIFIER

Reverse Voltage - 50 to 1000 Volts

Forward Current - 1.0 Ampere

PATENTED

DO-204AL

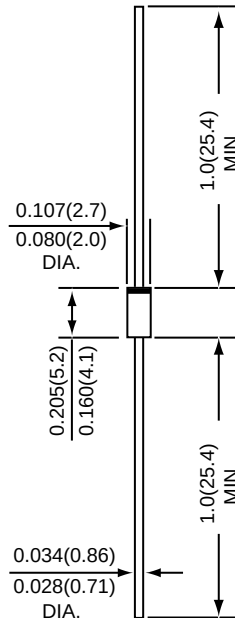

*Dimensions in inches and (millimeters)

SUPEREX II™



FEATURES

- * GPRC (Glass Passivated Rectifier Chip) inside
- * Glass passivated cavity-free junction
- * Capable of meeting environmental standards of MIL-S-19500
- * For use in high frequency rectifier circuits
- * Fast switching for high efficiency
- * 1.0 Ampere operation at $T_A=55^{\circ}\text{C}$ with no thermal runaway
- * Typical IR less than 0.1uA
- * High temperature soldering guaranteed: $260^{\circ}\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

MECHANICAL DATA

Case : JEDEC DO-204AL molded plastic over glass body
Terminals : Plated axial leads , solderable per MIL-STD-750, Method 2026
Polarity : Color band denotes cathode end
Mounting Position : Any
Weight : 0.012 ounces , 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	RGP10										UNITS
		A	B	D	G	J	JA	K	KA	M	MA	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	600	800	800	1000	1000	Volts
Maximum RMS voltage	VRMS	35	70	140	280	420	420	560	560	700	700	Volts
Maximum DC blocking voltage	VDC	50	100	200	400	600	600	800	800	1000	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length (SEE FIG.1)	I (AV)	1.0										Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	30										Amps
Maximum instantaneous forward voltage at 1.0 A	VF	1.3										Volts
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=125°C TA=150°C	IR	5 30 50										uA
Maximum reverse recovery time (NOTE 1)	trr	150				250	150	500	300	500	300	nS
Typical junction capacitance (NOTE 2)	CJ	15										pF
Typical thermal resistance (NOTE 3)	R θJA	55										°C / W
Operating junction and storage temperature range	TJ,TSTG	-65 to +175										°C

NOTES : (1) Reverse recovery test condition : IF 0.5A, IR=1.0A, Irr=0.25A
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead lengths, P.C.B. mounted.

