


RGP20A THRU RGP20J

GLASS PASSIVATED JUNCTION FAST SWITCHING PLASTIC RECTIFIER

Reverse Voltage - 50 to 600 Volts Forward Current - 2.0 Amperes

PATENTED*

Case Style GP20

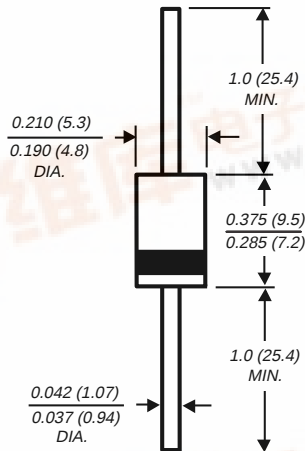

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation technique is covered by

Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306

SUPERRECTIFIER®

FEATURES

- ♦ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ♦ High temperature metallurgically bonded construction
- ♦ Glass passivated cavity-free junction
- ♦ Capable of meeting environmental standards of MIL-S-19500
- ♦ Fast switching for high efficiency
- ♦ 2.0 Ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- ♦ Typical I_R less than $0.2\mu\text{A}$
- ♦ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, $0.375"$ (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: Molded plastic over solid glass body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.03 ounce, 0.8 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.


	SYMBOLS	RGP 20A	RGP 20B	RGP 20D	RGP 20G	RGP 20J	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	2.0					Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80.0					Amps
Maximum instantaneous forward voltage at 2.0A	V_F	1.3					Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=125^\circ\text{C}$	I_R	5.0 100.0					μA
Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{R(AV)}$	100.0					μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	150.0				250	ns
Typical junction capacitance (NOTE 2)	C_J	35.0					pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	22.0					$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175					$^\circ\text{C}$

NOTES:

(1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_{rr}=0.25\text{A}$

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

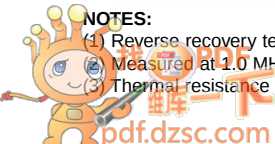

RATINGS AND CHARACTERISTIC CURVES RGP20A THRU RGP20J

