




5 Amp. Glass Passivated Fast Recovery Rectifier

Dimensions in mm.

P-6
(Plastic)

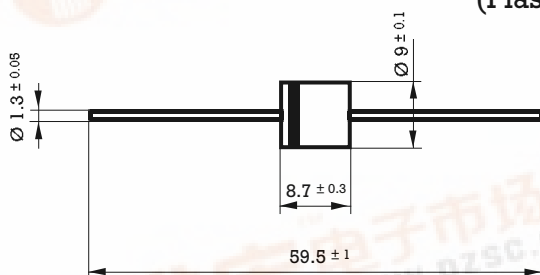

Mounting instructions

1. Min. distance from body to soldering point, 4 mm.
2. Max. solder temperature, 350 °C.
3. Max. soldering time, 3.5 sec.
4. Do not bend lead at a point closer than 4 mm. to the body.

Voltage
50 to 1000 V.

Current
5.0 A. at 55 °C.



- Glass passivated junction
- High surge capability
- The plastic material carries U/L recognition 94 V-0
- Terminals: Axial Leads
- Polarity: Color band denotes cathode

Maximum Ratings, according to IEC publication No. 134

		RGP 50A	RGP 50B	RGP 50D	RGP 50G	RGP 50J	RGP 50K	RGP 50M
V _{RRM}	Peak recurrent reverse voltage (V)	50	100	200	400	600	800	1000
I _{F(AV)}	Forward current at Tamb = 55 °C	5 A						
I _{FRM}	Recurrent peak forward current	60 A						
I _{FSM}	8.3 ms. peak forward surge current (Jedec Method)	300 A						
t _{rr}	Max. reverse recovery time from I_F = 0.5 A I_R = 1 A I_{RR} = 0.25 A	150 ns				250 ns	500 ns	
T _j	Operating temperature range	− 65 to + 175 °C						
T _{stg}	Storage temperature range	− 65 to + 175 °C						
E _{RSM}	Maximum non repetitive peak reverse avalanche energy. I _R = 1A ; T _j = 25 °C	20 mJ						

Electrical Characteristics at $T_{amb} = 25\text{ °C}$

V_F	Max. forward voltage drop at $I_F = 5\text{ A}$	1.3 V
I_R	Max. reverse current at V_{RRM} at 25 °C	5 $\mu\text{ A}$
	Max. thermal resistance ($l = 10\text{ mm.}$)	10 °C/W



Rating and Characteristic Curves

