



RH56D-PCI

Host Controlled V.90/K56flex™

Modem Device Family for Desktop Applications

Introduction

The Conexant™ RH56D-PCI V.90/K56flex™ Host Controlled Modem Device Family supports high speed analog data up to 56 kbps, 14.4 kbps fax, voice/TAM, and speakerphone (optional) operation. The modem operates with PSTN telephone lines in the U.S. and world-wide. The modem is available with or without speakerphone support (see Table 1).

The modem is packaged in a single 144-pin thin quad flat pack (TQFP) that combines PCI Bus Interface (BI) and Modem Data Pump (MDP) functions. **This modem is pin-compatible with the SoftK56-PCI modem, part number R6793 (see SoftK56-PCI data sheet Order No. MD231).**

Host modem software is also provided.

Operating with +3.3V power, this device set supports 32-bit host applications in such designs as embedded motherboards and PCI half cards. Downloadable architecture allows updating of MDP executable code.

In ITU-T V.90/K56flex data mode, the modem can receive data at speeds up to 56 kbps from a digitally connected V.90 or K56flex-compatible central site modem. A V.90/K56flex modem takes advantage of the PSTN which is primarily digital except for the client modem to central office local loop and is ideal for applications such as remote access to an Internet Service Provider (ISP), online service, or corporate site. In this mode, the modem can transmit data at speeds up to V.34 rates.

In V.34 data mode, the modem operates at line speeds up to 33.6 kbps. When applicable, error correction (V.42/MNP 2-4) and data compression (V.42 bis/MNP 5) maximize data transfer integrity and boost average data throughput. Non-error-correcting mode is also supported.

All models support remote audio recording and remote audio playback over the telephone line interface using A-Law, μ-Law, or linear coding at 8000 or 7200 Hz sample rate to support applications such as digital telephone answering machine (TAM).

The SP model supports position independent, full-duplex speakerphone (FDSP) operation.

Fax Group 3 send and receive rates are supported up to 14.4 kbps with T.30 protocol.

V.80 synchronous access mode supports host-controlled communication protocols, e. g., H.324 video conferencing.

Reference design kits are available to minimize application design time and costs.

Features

- Data modem
 - ITU-T V.90, K56flex, V.34 (33.6 kbps), V.32 bis, V.32, V.22 bis, V.22, V.23, and V.21; Bell 212A and 103
 - V.42 LAPM and MNP 2-4 error correction
 - V.42 bis and MNP 5 data compression
 - V.250 (ex V.25 ter) and V.251 (ex V.25 ter Annex A) commands
 - Fax modem send and receive rates up to 14.4 kbps ITU-T V.17, V.29, V.27 ter, and V.21 channel 2
 - EIA/TIA 578 Class 1 and T.31 Class 1.0 commands
- Voice, telephony, TAM
 - V.253 commands
 - 8-bit μ-Law/A-Law coding (G.711)
 - 8-bit/16-bit linear coding
 - 8000/7200 Hz sample rate
 - Music on hold from host or analog hardware input
 - TAM support with concurrent DTMF detect, ring detect and caller ID
- V.80 synchronous access mode supports host-controlled communication protocols
 - H.324 interface support
- V.8/V.8bis and V.251 (ex V.25 ter Annex A) commands
- Full-duplex Speakerphone (FDSP) Mode (SP model)
 - Telephone handset interface
 - External microphone and speaker interface
 - Microphone gain and muting
 - Speaker volume control and muting
 - Adaptive acoustic, line, and handset echo cancellation
 - Loop gain control, transmit and receive path AGC
- Data/Fax/Voice call discrimination
- Multiple country support
 - Call progress, blacklisting
- Single profile stored in host
- Modem and audio paths concurrent across PCI Bus
- System compatibilities
 - Windows 95, Windows 95 OSR2, Windows 98, Windows NT 4.0, Windows NT 5.0 operating systems
 - Microsoft's PC 98 Design Initiative compliant
 - Unimodem/V compliant
 - Pentium 133 MHz equivalent or greater
 - 16 Mbyte RAM or more
- 32-bit PCI Local Bus interface
 - Conforms to the PCI Local Bus Specification, Production Version, Revision 2.1
 - PCI Bus Mastering interface to the MDP
 - 33 MHz PCI clock support

Features (Continued)

- Supports PCI Bus Power Management
 - Conforms to PCI Bus Power Management Specification, Rev. 1.1
 - ACPI Power Management Registers
 - APM support
 - PME# support
- Device package
 - R6795 Modem: 144-pin TQFP (1.6 mm max. height)
- +3.3V operation with +5V tolerant digital inputs
- +5V or +3.3V analog operation

Table 1. Modem Models and Functions

Marketing Model Number ¹	Combined PCI Bus Interface (BIF) and Modem Data Pump (MDP) Part No. [144-Pin TQFP]	Signal Processing	Host Bus	V.90/K56flex Data, V.17 Fax, Voice/TAM	FDSP
RH56D-PCI	R6795-12	Hardware DSP	PCI	Y	—
RH56D/SP-PCI	R6795-11	Hardware DSP	PCI	Y	Y

Notes:

1. Model options:

SP	Full-duplex speakerphone (FDSP)
PCI	PCI Bus interface
2. Supported functions (Y = Supported; – = Not supported):

Voice/TAM,	Voice playback and record through line
FDSP	Full-duplex speakerphone and voice playback and record through line, handset, and mic/speaker

Information provided by Conexant Systems, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by Conexant for its use, nor any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent rights of Conexant other than for circuitry embodied in Conexant products. Conexant reserves the right to change circuitry at any time without notice. This document is subject to change without notice.

K56flex is a trademark of Conexant Systems, Inc. and Lucent Technologies.

Conexant and "What's Next in Communications Technologies" are trademarks of Conexant Systems, Inc.

Product names or services listed in this publication are for identification purposes only, and may be trademarks or registered trademarks of their respective companies. All other marks mentioned herein are the property of their respective owners.

©1999, Conexant Systems, Inc.

Printed in U.S.A.

All Rights Reserved

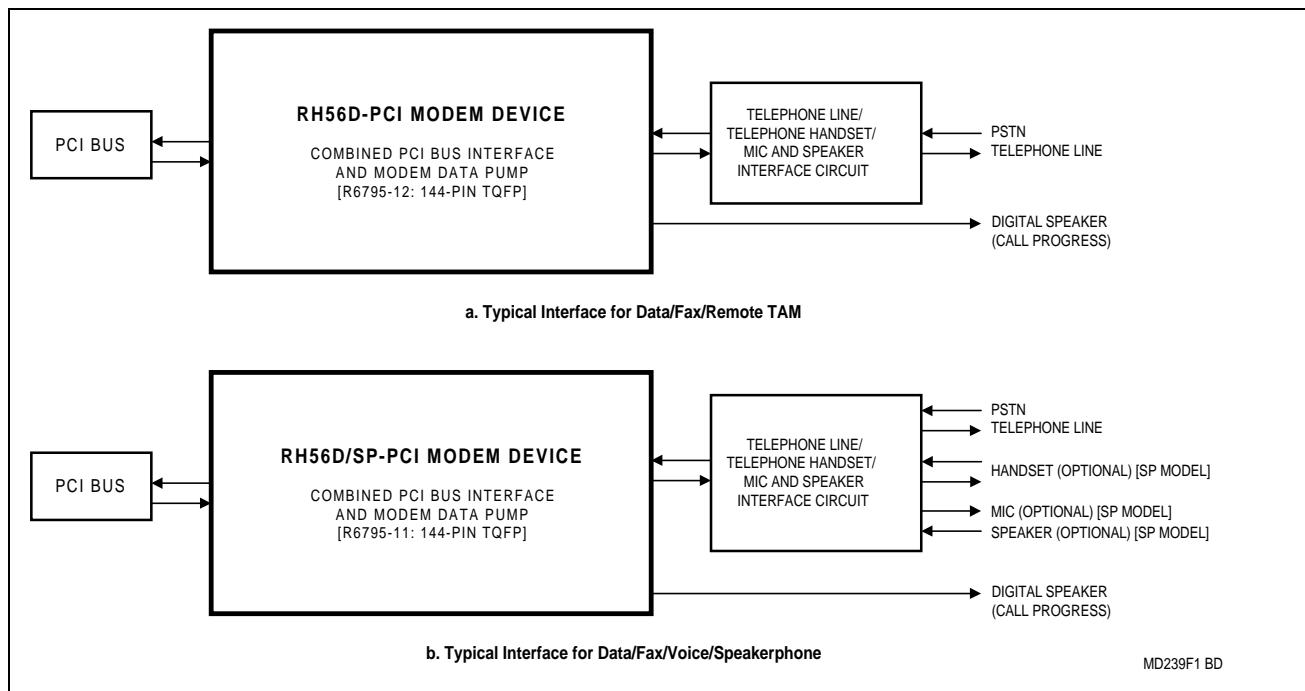


Figure 1. RH56D-PCI Major Interfaces

Description

General

The RH56D-PCI modem provides the processing core for a complete system design featuring data/fax modem, voice/TAM, and speakerphone support, depending on specific model (Table 1).

Note: The term, "RH56D-PCI Device Set", refers to the family of modem models listed in Table 1.

Modem operation, including dialing, call progress, telephone line interface, telephone handset interface, audio interface, and host interface functions are supported and controlled through the command set.

The modem hardware connects to the host processor via a PCI Bus interface. The OEM adds a crystal circuit, EEPROM, telephone line interface, telephone handset interface (optional), and audio interface (optional) to complete the system.

Host Modem Software

The host modem software performs two distinct tasks:

1. General modem control which includes command sets, fax Class 1, voice/TAM, speakerphone, error correction, data compression, and operating system interface functions.
2. Modem data pump control. Binary executable code controlling MDP operation is downloaded as required during operation.

Configurations of the modem software are provided to support modem models listed in Table 1.

Binary executable modem software is provided for the OEM.

Data/Fax Modes

As a V.90/K56flex data modem, the modem can receive data from a digital source using a V.90- or K56flex-compatible central site modem over the digital telephone network portion of the PSTN at line speeds up to 56 kbps. Asymmetrical data transmission supports sending data up to V.34 rates. This mode can fallback to full-duplex V.34 mode, and to lower rates as dictated by line conditions.

As a V.34 data modem, the modem can operate in 2-wire, full-duplex, asynchronous modes at line rates up to 33.6 kbps. Data modem modes perform complete handshake and data rate negotiations. Using V.34 modulation to optimize modem configuration for line conditions, the modem can connect at the highest data rate that the channel can support from 33600 bps down to 2400 bps with automatic fallback. Automode operation in V.34 is provided in accordance with PN3320 and in V.32 bis in accordance with PN2330. All tone and pattern detection functions required by the applicable ITU or Bell standard are supported.

In fax modem mode, the modem can operate in 2-wire, half-duplex, synchronous modes and can support Group 3 facsimile send and receive speeds of 14400, 12000, 9600, 7200, 4800, or 2400 bps. Fax data transmission

and reception performed by the modem are controlled and monitored through the fax EIA/IA-578 Class 1 and T.31 Class 1.0 command interface. Full HDLC formatting, zero insertion/deletion, and CRC generation/checking are provided.

Synchronous Access Mode (SAM) - Video Conferencing

V.80 synchronous access mode between the modem and the host/DTE is provided for host-controlled communication protocols, e.g., H.324 video conferencing applications.

Voice-call-first (VCF) before switching to a videophone call is also supported.

Voice/TAM Mode

Voice/TAM Mode features include 8-bit μ -Law, A-Law, and linear coding at 8000 Hz and 7200 Hz sample rates. Tone detection/generation, call discrimination, and concurrent DTMF detection are also supported. ADPCM (4-bit IMA) coding is also supported to meet Microsoft WHQL logo requirements.

Voice/TAM Mode is supported by three submodes:

1. Online Voice Command Mode supports connection to the telephone line or, for the SP model, a handset.
2. Voice Receive Mode supports recording voice or audio data input at the RIN pin, typically from the telephone line or, for the SP model, a microphone/handset.
3. Voice Transmit Mode supports playback of voice or audio data to the TXA1/TXA2 output, typically to the telephone line or, for the SP model, a speaker/handset.

Speakerphone Mode (SP Model)

The SP model includes additional telephone handset, external microphone, and external speaker interfaces which support voice and full-duplex speakerphone (FDSP) operation.

Hands-free full-duplex telephone operation is supported in Speakerphone Mode under host control. Speakerphone Mode features an advanced proprietary speakerphone algorithm which supports full-duplex voice conversation with acoustic, line, and handset echo cancellation. Parameters are constantly adjusted to maintain stability with automatic fallback from full-duplex to pseudo-duplex operation. The speakerphone algorithm allows position independent placement of microphone and speaker. The host can separately control volume, muting, and AGC in microphone and speaker channels.

Hardware Interface

The major functional interface signals are shown in Figure 2.

The R6795 144-pin TQFP hardware interface signals are shown in Figure 3.

The R6795 144-pin TQFP pin signals are shown in Figure 4.

A schematic showing the R6795 interface for a typical application (data/fax) is shown in Figure 5.

Package Dimensions

The package dimensions for the 144-pin TQFP are shown in Figure 6.

Power Requirements

The current and power requirements are listed in Table 2.

Absolute Maximum Ratings

The absolute maximum ratings are listed in Table 3.

Additional Information

Additional information is described in the RH56D-PCI Designer's Guide (Order No. 1213) and in the Command Reference Manual (Order No. 1118).

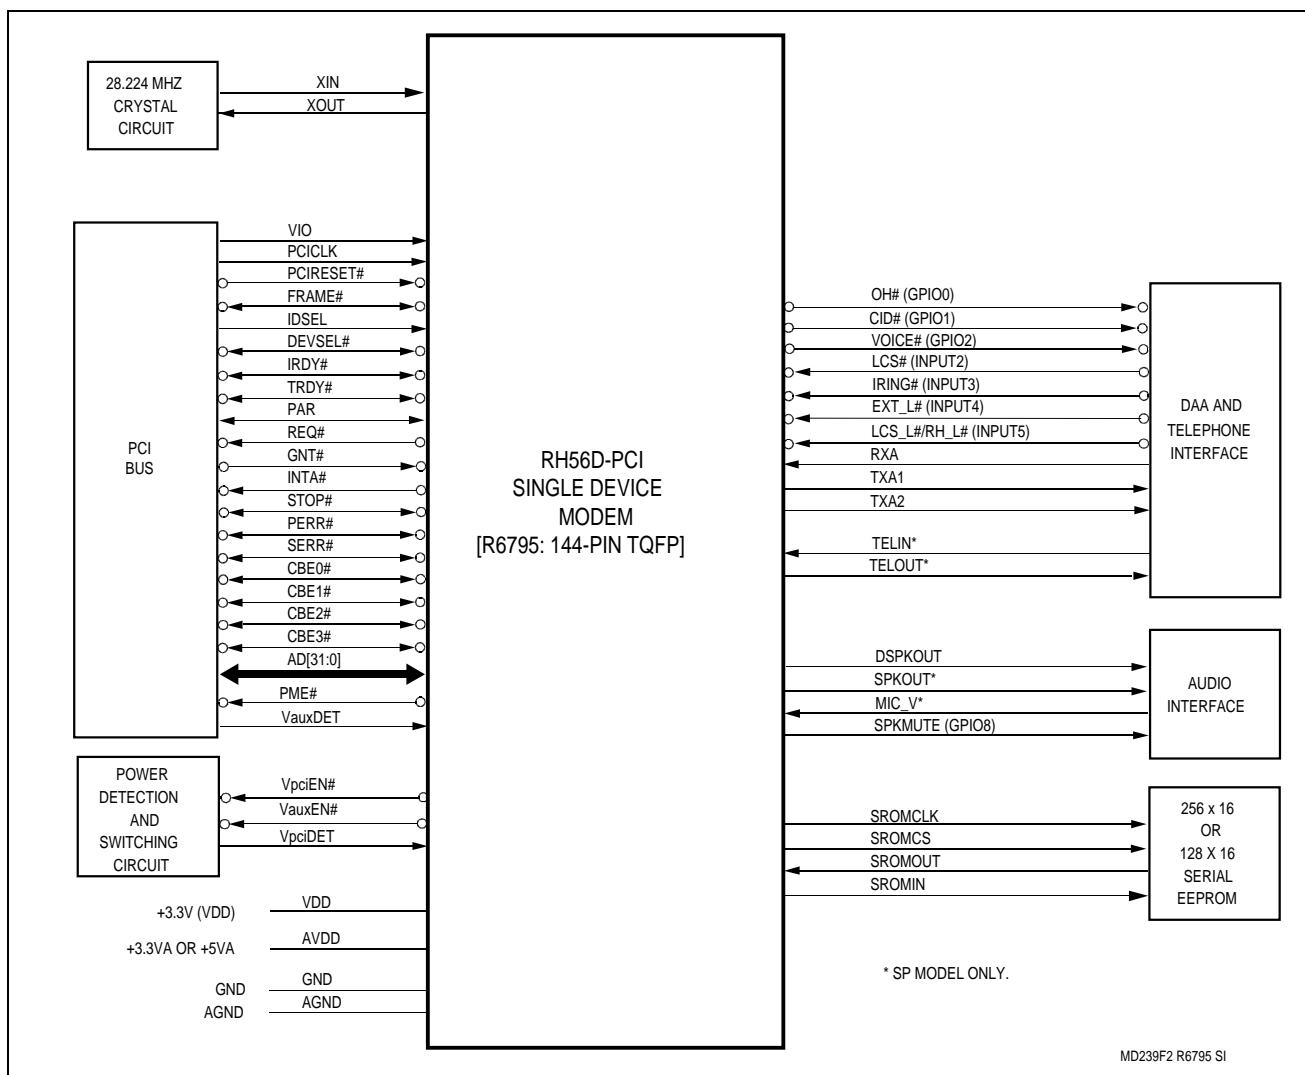


Figure 2. RH56D-PCI Major Hardware Interface Signals

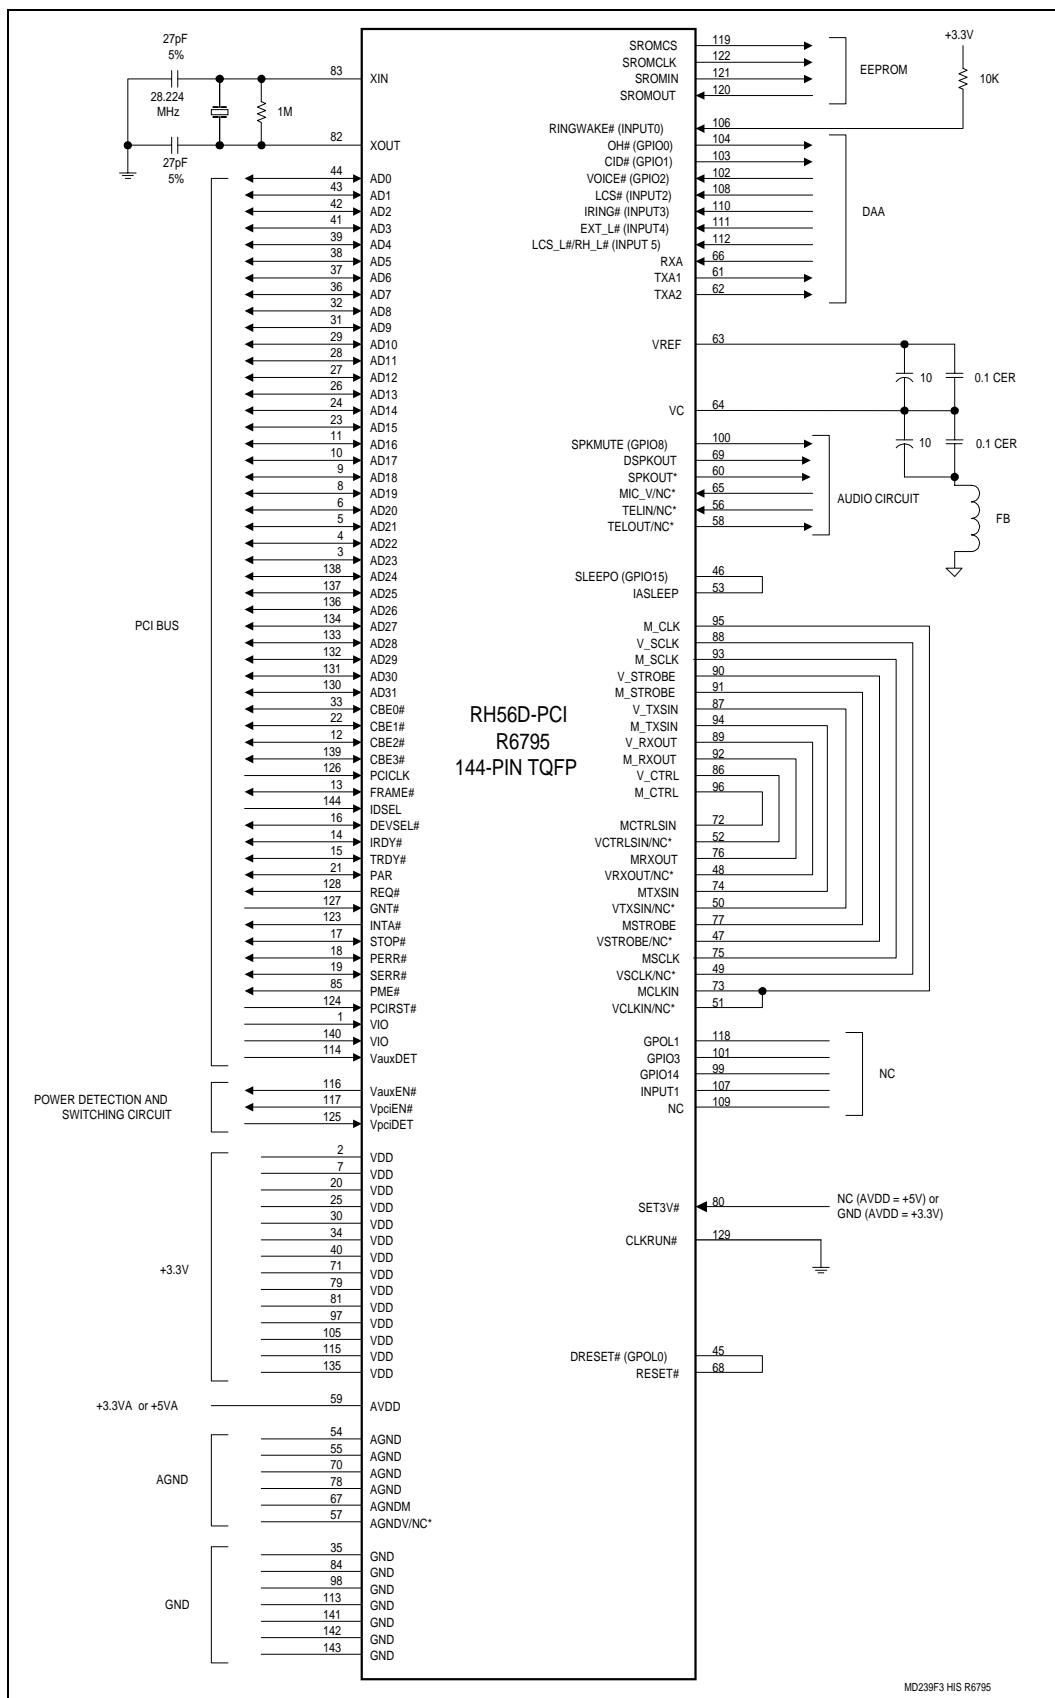


Figure 3. R6795 144-Pin TQFP Hardware Interface Signals

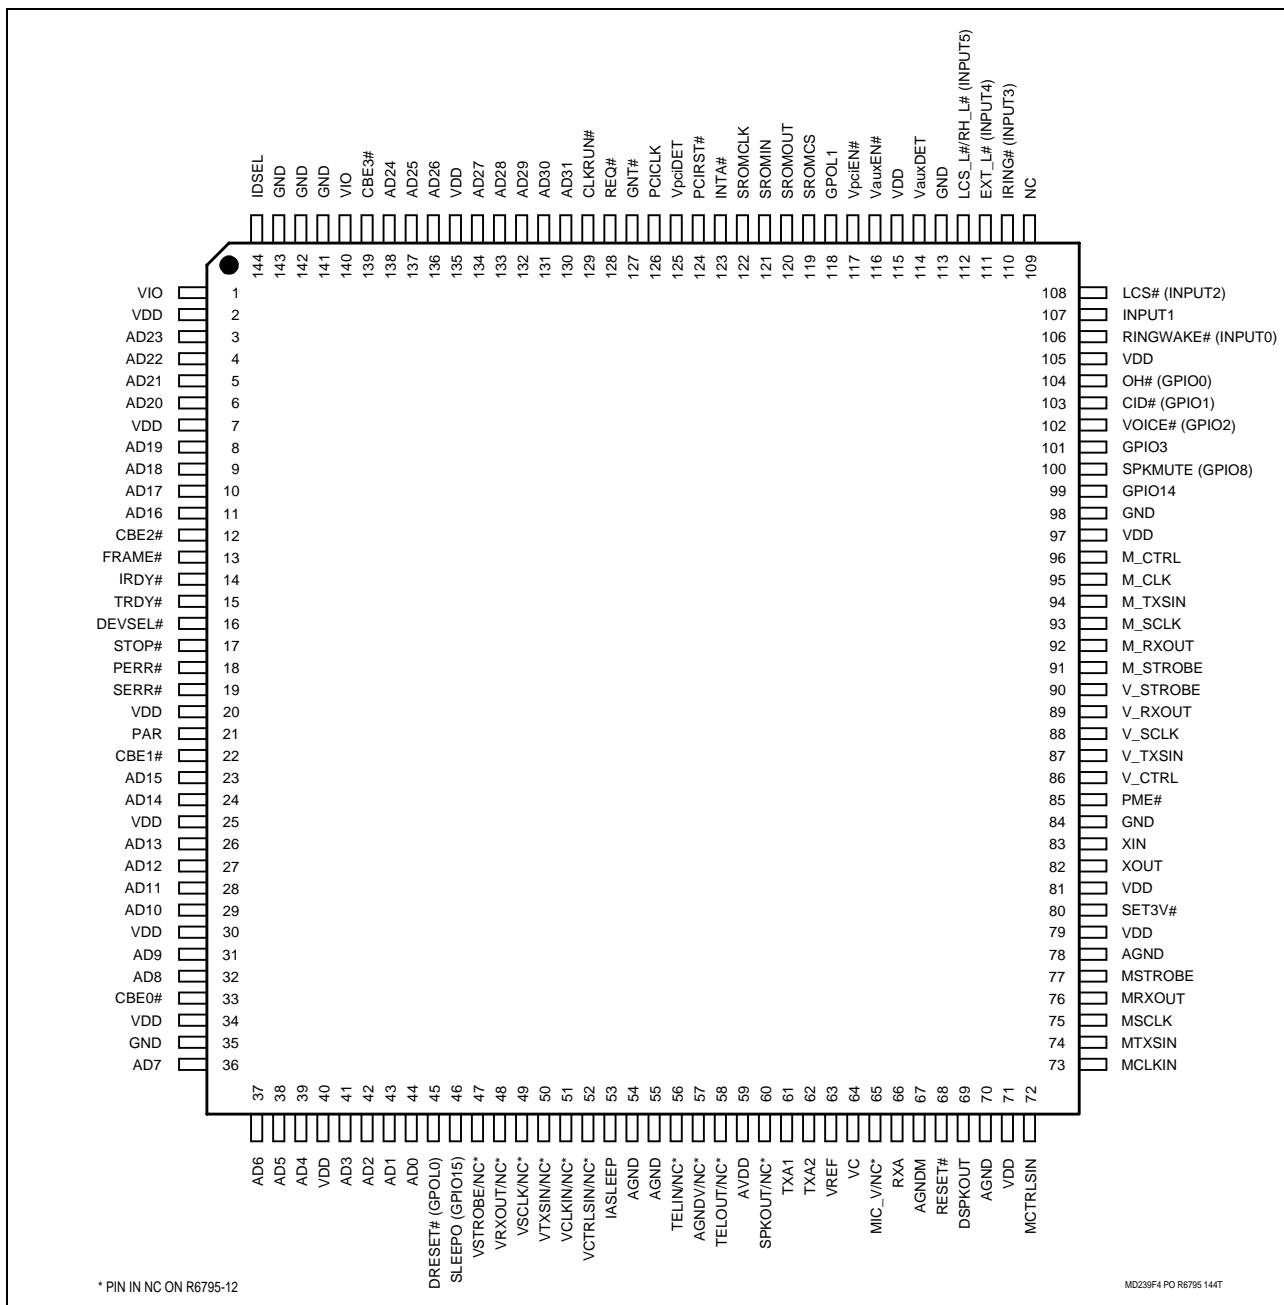


Figure 4. R6795 144-Pin TQFP Pin Signals

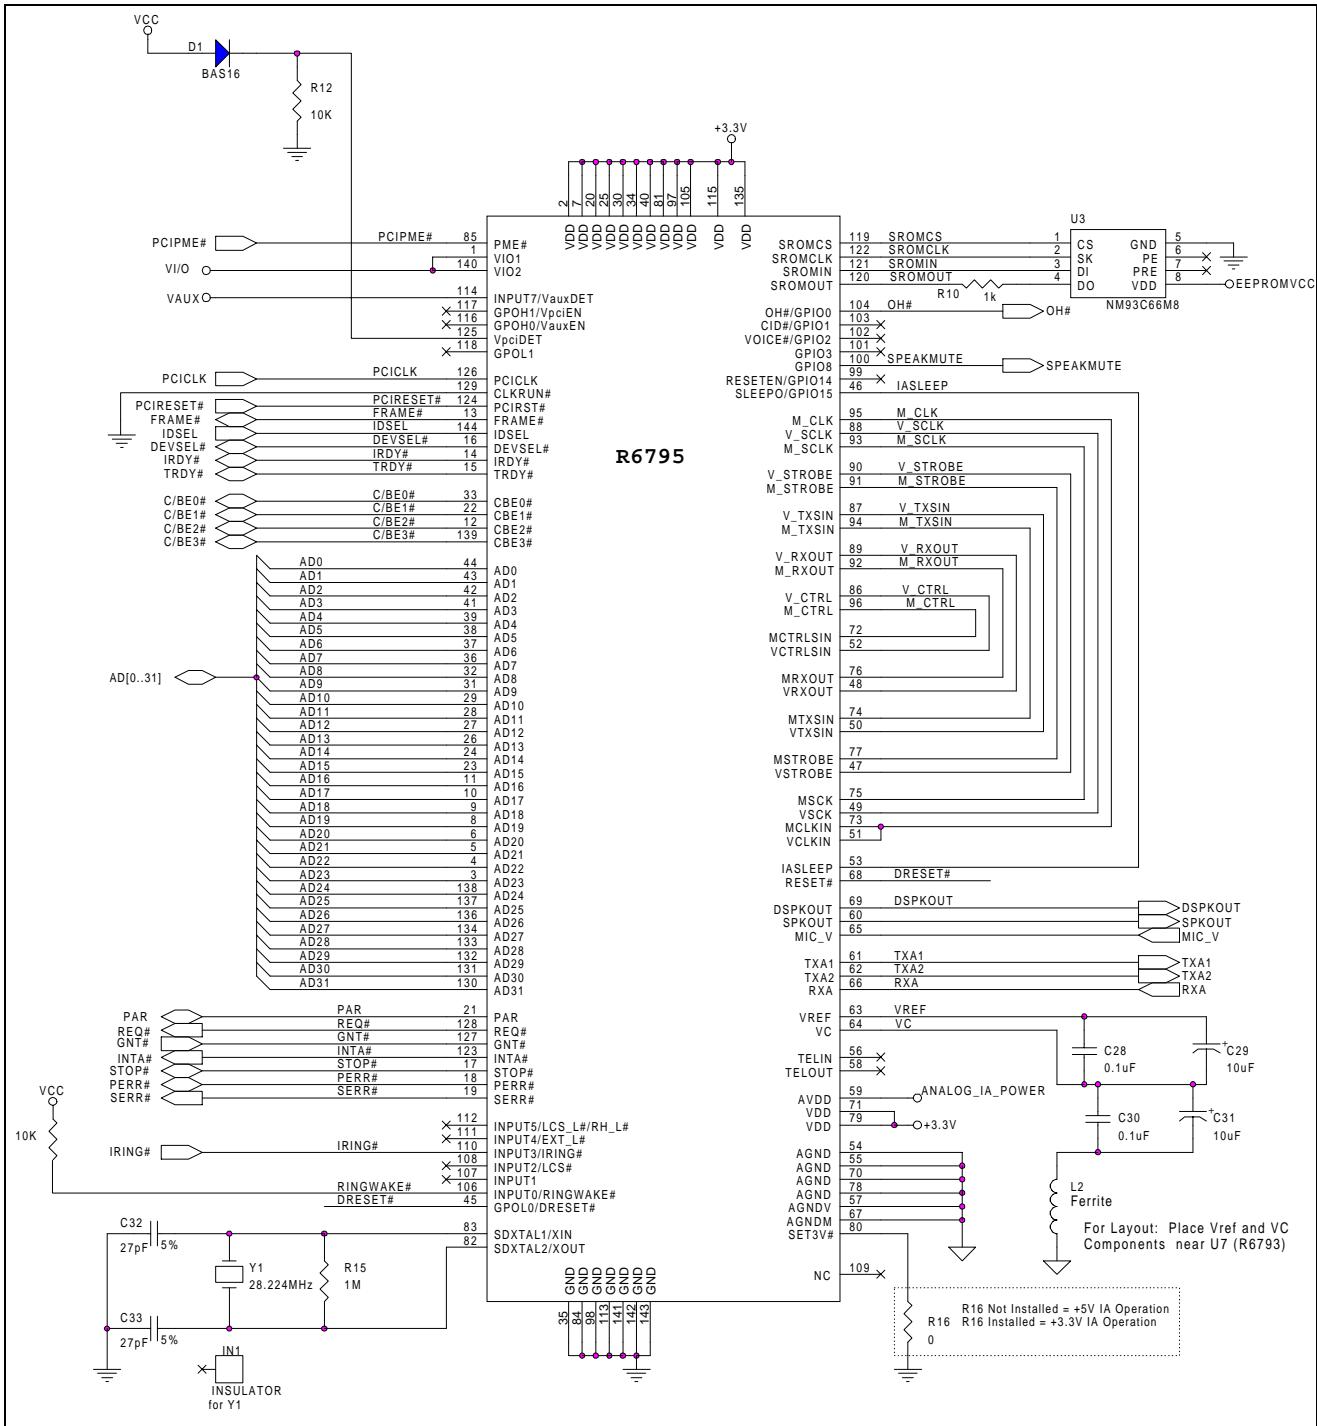


Figure 5. Schematic - R6795 Interface –Speakerphone Application

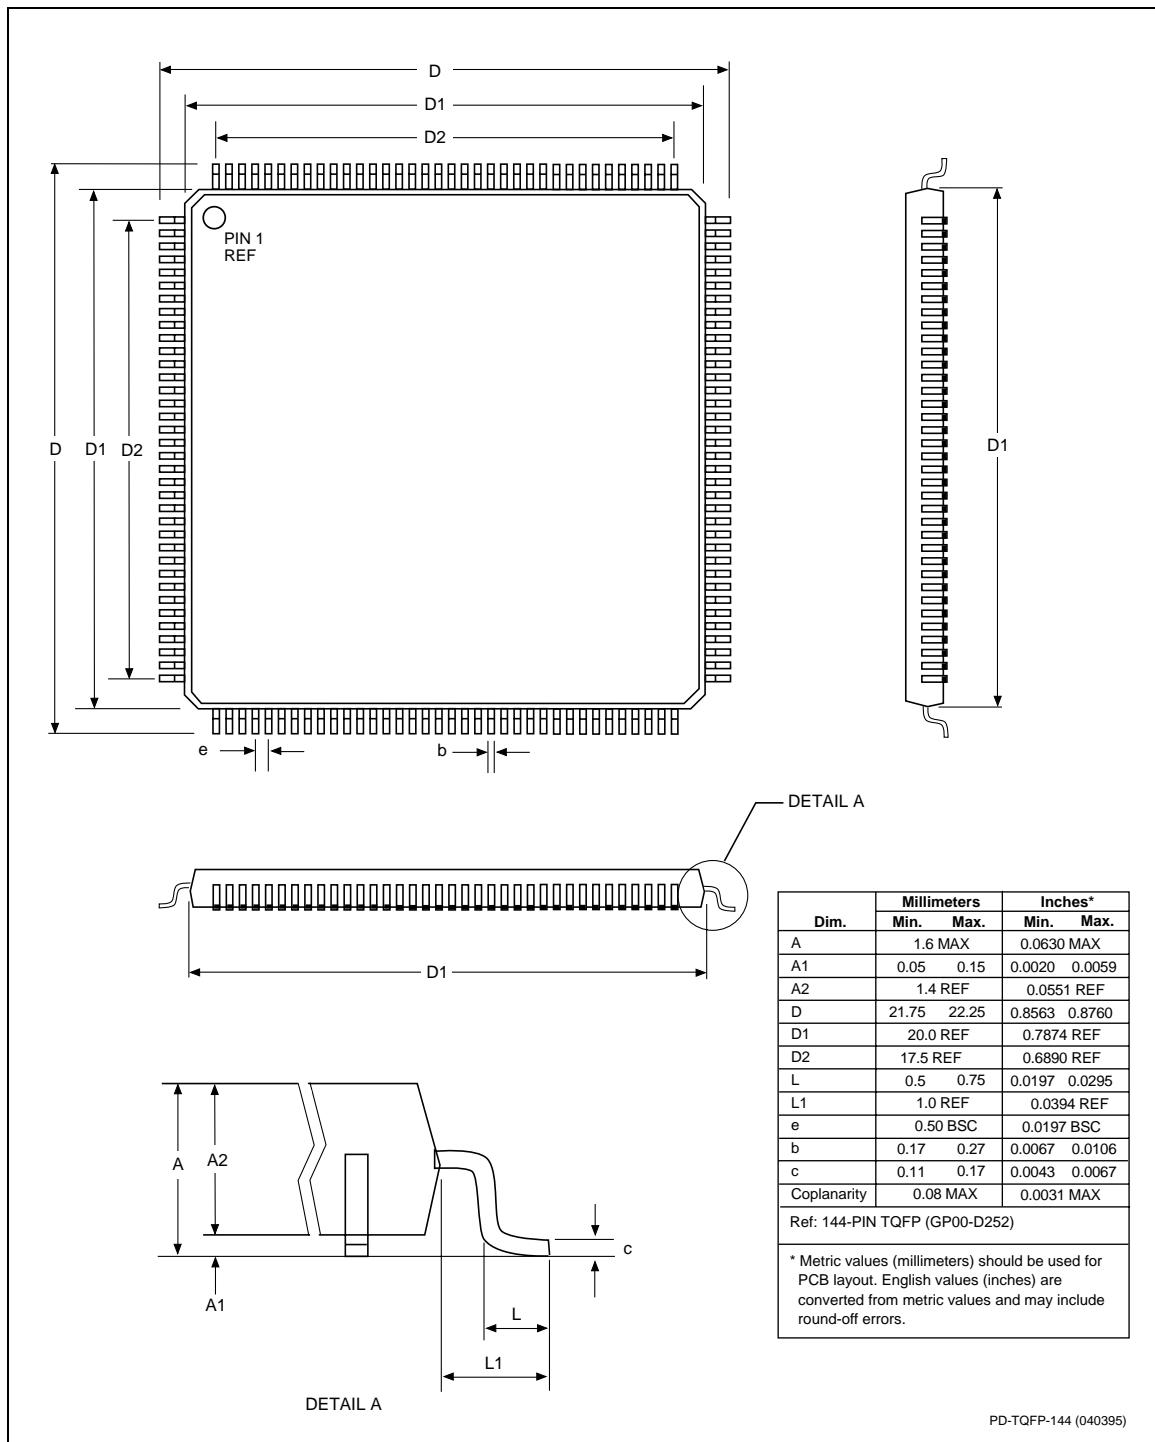


Figure 6. Package Dimensions - 144-Pin TQFP

Table 2. Current and Power Requirements

Device State (Dx) and Bus State (Bx)	Conditions			Current		Power	
	PCI Bus Power	PCI Clock (PCICLK)	Line Connection	Typical Current (mA)	Maximum Current (mA)	Typical Power (mW)	Maximum Power (mW)
D0, B0	On	Running	Yes	TBD	TBD	TBD	TBD
D0, B0	On	Running	No	TBD	TBD	TBD	TBD
D3, B0	On	Running	No	TBD	TBD	TBD	TBD
D3, B1	On	Running	No	TBD	TBD	TBD	TBD
D3, B2, B3 (D3 hot)	On	Stopped	No	TBD	TBD	TBD	TBD
D3, B3 (D3 cold)	Off	Stopped	No	TBD	TBD	TBD	TBD

Notes:

Operating voltage: VDD = +3.3V ± 0.3V.

Test conditions: VDD = +3.3 VDC for typical values; VDD = +3.6 VDC for maximum values.

For all modes, +3.3V is supplied to BIF and MDP.

Definitions:

PCI Bus Power	On: PCI Bus +5V and +3.3V on (modem normally powered by +3.3V from PCI Bus +3.3V or regulated down from PCI Bus +5V); PCIRST# not asserted. Off: PCI Bus +5V and +3.3V off (modem normally powered by +3.3V from Vaux or Vpci); PCIRST# asserted.
PCI Clock (PCICLK)	Running: PCI Bus signal PCICLK running; Stopped: PCI Bus signal PCICLK stopped (off).
Line connection:	Yes: Off-hook, IA powered. No: On-hook, IA powered down.
Device States:	D3: Low power state. Suspend state can change the system power state; the resulting power state depends on the system architecture (OS, BIOS, hardware) and system configuration (i.e., other PCI installed cards). D0: Full power state.
Device and Bus States:	D0, B0: Any PCI transaction, PCICLK running, VCC present. D3, B1: No PCI Bus transactions, PCICLK running, VCC present. D3, B2, B3: No PCI transactions, PCICLK stopped, VCC may be present. D3, B3: No PCI transactions, PCICLK stopped, no VCC.

Refer to the PCI Bus Power Management Interface Specification for additional information.

Table 3. Absolute Maximum Ratings

Parameter	Symbol	Limits	Units
Supply Voltage	V _{DD}	-0.5 to +4.0	V
Input Voltage	V _{IN}	-0.5 to (VIO +0.5)*	V
Operating Temperature Range	T _A	-0 to +70	°C
Storage Temperature Range	T _{STG}	-55 to +125	°C
Analog Inputs	V _{IN}	-0.3 to (VAA + 0.5)	V
Voltage Applied to Outputs in High Impedance (Off) State	V _{HZ}	-0.5 to (VIO +0.5)*	V
DC Input Clamp Current	I _{IK}	±20	mA
DC Output Clamp Current	I _{OK}	±20	mA
Static Discharge Voltage (25°C)	V _{ESD}	±2500	V
Latch-up Current (25°C)	I _{TRIG}	±400	mA

* VIO = +3.3V ± 0.3V or +5V ± 5%.

NOTES

Worldwide Headquarters
 4311 Jamboree Road,
 P.O. Box C
 Newport Beach, CA 92658-8902
 Phone: (949) 483-4600
 Fax: (949) 483-6375

For more information:
Call 1-800-854-8099
 International information:
Call 1-949-483-6996

URL Address:
<http://www.conexant.com>
 E-Mail Address:
literature@conexant.com

REGIONAL SALES OFFICES

US Northwest/Pacific Northwest
 3600 Pruneridge Avenue
 Suite 100
 Santa Clara, CA 95051
 Phone: (408) 249-9696
 Fax: (408) 249-7113

US Los Angeles
 1000 Business Center Circle
 Suite 215
 Thousand Oaks, CA 91320
 Phone: (805) 376-0559
 Fax: (805) 376-8180

US Southwest
 4350 Von Karman Ave.
 Suite 400
 Newport Beach, CA 92660
 Phone: (949) 483-9119
 Fax: (949) 483-9090

US North Central
 Two Pierce Place
 Chancellory Park
 Suite 810
 Itasca, IL 60143
 Phone: (630) 773-3454
 Fax: (630) 773-3907

US South Central
 17304 Preston Road
 Suite 970
 Dallas, TX 75252
 Phone: (972) 733-0723
 Fax: (972) 407-0639

US Northeast
 239 Littleton Road
 Suite 4A
 Westford, MA 01886
 Phone: (508) 692-7660
 Fax: (508) 692-8185

US Southeast
 3500 Parkway Lane, Suite 415
 Norcross, GA 30092
 Phone: (770) 246-8283
 Fax: (770) 246-0018

US Florida/South America
 One Prestige Place
 2600 McCormick Drive
 Suite 350
 Clearwater, FL 33759
 Phone: (813) 799-8406
 Fax: (813) 799-8306

US Mid-Atlantic
 Princeton Pike Corporate Center
 993 Lenox Drive, Suite 200
 Lawrenceville, NJ 08648
 Phone: (609) 219-7462
 Fax: (609) 895-2666

European Headquarters
 Les Taissonnieres B1
 1680 Route des Dolines
 BP 283
 06905 Sophia Antipolis Cedex
 France
 Phone: (33) 4 93 00 33 35
 Fax: (33) 4 93 00 33 03

Europe Central
 Paul-Gerhardt-Allee 50 a
 81245 München
 Germany
 Phone: (49-89) 829-1320
 Fax: (49-89) 834-2734

Europe Mediterranean
 Via G. Di Vittorio, 1
 20017 Mazzo Di Rho (MI)
 Italy
 Phone: (39 2) 93179911
 Fax: (39 2) 93179913

Europe North
 Berkshire Court
 Western Road
 Bracknell
 Berkshire RG12 1RE
 England
 Phone: 44 (0) 1344 486444
 Fax: 44 (0) 1344 486555

Europe North (Satellite)
 11 Galgaley Haplada Street
 P.O. Box 12660
 Herzlia 46733
 Israel
 Phone: (972) 9 9524000
 Fax: (972) 9 9573732

Europe South
 Tour GAN
 Cedex 13
 92082 Paris La Défense 2
 France
 Phone: (33) 1 49 06 39 80
 Fax: (33) 1 49 06 39 90

APAC Headquarters
 1 Kim Seng Promenade
 #09-01 East Tower
 Great World City
 Singapore 237994
 Phone: (65) 737-7355
 Fax: (65) 737-9077

Australia
 Suite 603, 51 Rawson Street
 Epping, NSW 2121
 Australia
 Phone: (61-2) 9869 4088
 Fax: (61-2) 9869 4077

China
 Shanghai Representative Office
 LT Square Building, Suite 3002
 500 Chengdu North Road
 Shanghai 200003 P.R.C.
 Phone: 86-21-6361-2515
 Fax: 86-21-6361-2516

Hong Kong
 13th Floor, Suites 8-10,
 Harbour Centre
 25 Harbour Road
 Wanchai,
 Hong Kong
 Phone: (852) 2 827-0181
 Fax: (852) 2 827-6488

India
 Regional Office - South Asia
 Capital Trust House
 47 Community Centre
 Friends Colony
 New Delhi - 110 065
 India
 Phone: (91-11) 692-4780
 Fax: (91-11) 692-4712

Korea
 Room No. 1508
 Korea Textile Centre Building
 944-31, Daechi-3dong
 Kangnam P.O. Box 2037
 Kangnam-ku
 Seoul
 Korea
 Phone: (82-2) 565-2880
 Fax: (82-2) 565-1440

Taiwan Headquarters
 Room 2808 International Trade Bldg.
 333, Keelung Road, Section I
 Taipei,
 Taiwan
 10548 ROC
 Phone: (886-2) 2720-0282
 Fax: (886-2) 2757-6760

Japan Headquarters
 Shimomoto Bldg.
 1-46-3 Hatsudai, Shibuya-ku
 Tokyo, 151
 Japan
 Phone: (81-3) 5371 1520
 Fax: (81-3) 5371 1501

SOU981214



CONEXANT
 What's next in communications technologies.