

RLD78PZW4

Laser Diodes

AlGaAs laser diode

RLD78PZW4

The RLD78PZW4 is infrared laser diode high power output type (pulse 230mW). This is the best for optical disk drive use, such as CD-R / RW.


●Applications

Max. x52 speed CD-R / RW drives.

●Features

- 1) Absolute maximum optical power output : pulse 230mW
- 2) Wave length : Typ. 784nm
- 3) ϕ 5.6mm small packages

●External dimensions (Unit : mm)

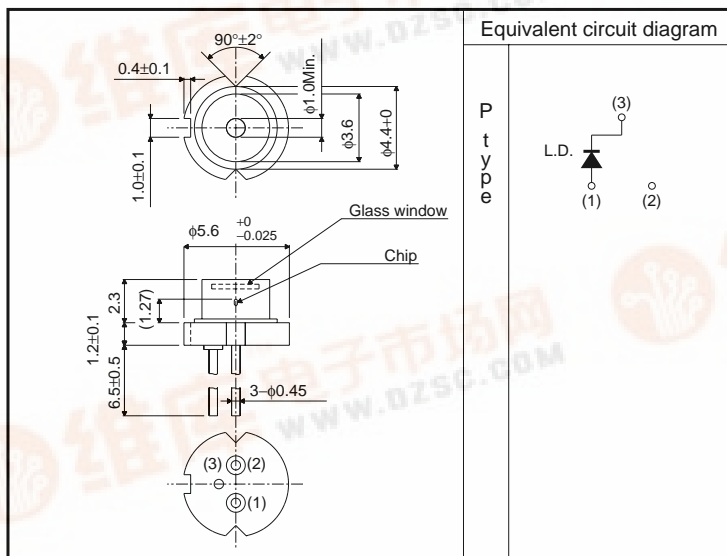

●Absolute maximum ratings (Tc=25°C)

Parameter	Symbol	Limits	Unit
Output	Po	Pulsed 230 Pulse condition : pulse 70nsec, Duty50%	mW
Reverse voltage	Raser	VR	2 V
	PIN photodiode	VR(PIN)	-
Operating temperature	Topr	-10 to +75 (Pulsed)	°C
Storage temperature	Tstg	-40 to +85	°C

Laser Diodes

●Electrical and optical characteristics (Tc=25°C, CW)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold current	I_{th}	-	30	50	mA	-
Operating current	I_{op}	-	133	165	mA	P _o =90mW
Operating voltage	V_{op}	-	2.1	2.5	V	
Differential efficiency	η	0.7	0.9	1.4	mW / mA	
Parallel divergence angle	$\theta_{//}^*$	8	9	10	deg	
Perpendicular divergence angle	θ_{\perp}^*	15	17	19	deg	
Parallel deviation angle	$\Delta\phi_{//}$	-2	0	+2	deg	
Perpendicular deviation angle	$\Delta\phi_{\perp}$	-3	0	+3	deg	
Emission point accuracy	ΔX ΔY ΔZ	-80	0	+80	μm	-
Peak emission wavelength	λ	779	784	789	nm	P _o =90mW
Astigmatism	Δl	-	-	6	μm	NA=0.15, P _o =90mW

* $\theta_{//}$ and θ_{\perp} are defined as the angle within which the intensity is 50% of the peak value.

●Electrical and optical characteristics curves

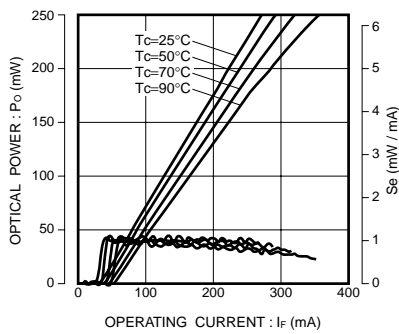


Fig.1 Optical output vs. operating current




Fig.2 PO vs. FFP

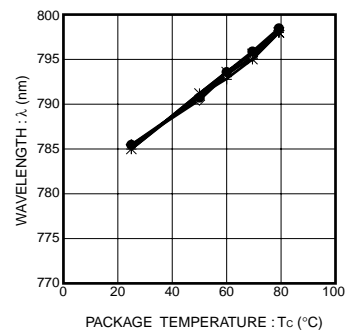


Fig.3 Dependence of wavelength on temperature

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.