


# MPSA05, MPSA06, MPSA55, MPSA56


MPSA06 and MPSA56 are Preferred Devices

## Amplifier Transistors

Voltage and Current are Negative for PNP Transistors



STYLE 1  
MPSA05, MPSA06



STYLE 1  
MPSA55, MPSA56

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage MPSA05, MPSA55 MPSA06, MPSA56	$V_{CEO}$	60 80	Vdc
Collector–Base Voltage MPSA05, MPSA55 MPSA06, MPSA56	$V_{CBO}$	60 80	Vdc
Emitter–Base Voltage	$V_{EBO}$	4.0	Vdc
Collector Current – Continuous	$I_C$	500	mAdc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	625 5.0	mW mW/ $^\circ\text{C}$
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	1.5 12	Watts mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$ (Note 1.)	200	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	$^\circ\text{C}/\text{W}$

1.  $R_{\theta JA}$  is measured with the device soldered into a typical printed circuit board.





ON Semiconductor™

<http://onsemi.com>

NPN  
MPSA05, MPSA06  
PNP  
MPSA55, MPSA56

### MARKING DIAGRAM

TO-92  
CASE 29  
STYLE 1



MPSA = Specific Device Code  
xxx = 05, 06, 55 or 56  
Y = Year  
WW = Work Week

### ORDERING INFORMATION

Device	Package	Shipping
MPSA05	TO-92	5000 Units/Box
MPSA05RLRA	TO-92	2000/Tape & Reel
MPSA05RLRM	TO-92	2000/Ammo Pack
MPSA06	TO-92	5000 Units/Box
MPSA06RLRA	TO-92	2000/Tape & Reel
MPSA06RLRM	TO-92	2000/Ammo Pack
MPSA06RLRP	TO-92	2000/Ammo Pack
MPSA55	TO-92	5000 Units/Box
MPSA55RLRA	TO-92	2000/Tape & Reel
MPSA56	TO-92	5000 Units/Box
MPSA56RLRA	TO-92	2000/Tape & Reel
MPSA56RLRM	TO-92	2000/Ammo Pack
MPSA56RLRP	TO-92	2000/Ammo Pack


Preferred devices are recommended choices for future use and best overall value.

# MPSA05, MPSA06, MPSA55, MPSA56

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b>				
Collector–Emitter Breakdown Voltage (Note 2.) ( $I_C = 1.0\text{ mAdc}$ , $I_B = 0$ )	$V_{(BR)CEO}$	60 80	–	Vdc
Emitter–Base Breakdown Voltage ( $I_E = 100\ \mu\text{Adc}$ , $I_C = 0$ )	$V_{(BR)EBO}$	4.0	–	Vdc
Collector Cutoff Current ( $V_{CE} = 60\text{ Vdc}$ , $I_B = 0$ )	$I_{CES}$	–	0.1	$\mu\text{Adc}$
Collector Cutoff Current ( $V_{CB} = 60\text{ Vdc}$ , $I_E = 0$ ) ( $V_{CB} = 80\text{ Vdc}$ , $I_E = 0$ )	$I_{CBO}$	–	0.1	$\mu\text{Adc}$
<b>ON CHARACTERISTICS</b>				
DC Current Gain ( $I_C = 10\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) ( $I_C = 100\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ )	$h_{FE}$	100 100	–	–
Collector–Emitter Saturation Voltage ( $I_C = 100\text{ mAdc}$ , $I_B = 10\text{ mAdc}$ )	$V_{CE(sat)}$	–	0.25	Vdc
Base–Emitter On Voltage ( $I_C = 100\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ )	$V_{BE(on)}$	–	1.2	Vdc
<b>SMALL–SIGNAL CHARACTERISTICS</b>				
Current–Gain – Bandwidth Product (Note 3.) ( $I_C = 10\text{ mA}$ , $V_{CE} = 2.0\text{ V}$ , $f = 100\text{ MHz}$ )  ( $I_C = 100\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ , $f = 100\text{ MHz}$ )	$f_T$	100 50	–	MHz


- Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
- $f_T$  is defined as the frequency at which  $|h_{fe}|$  extrapolates to unity.

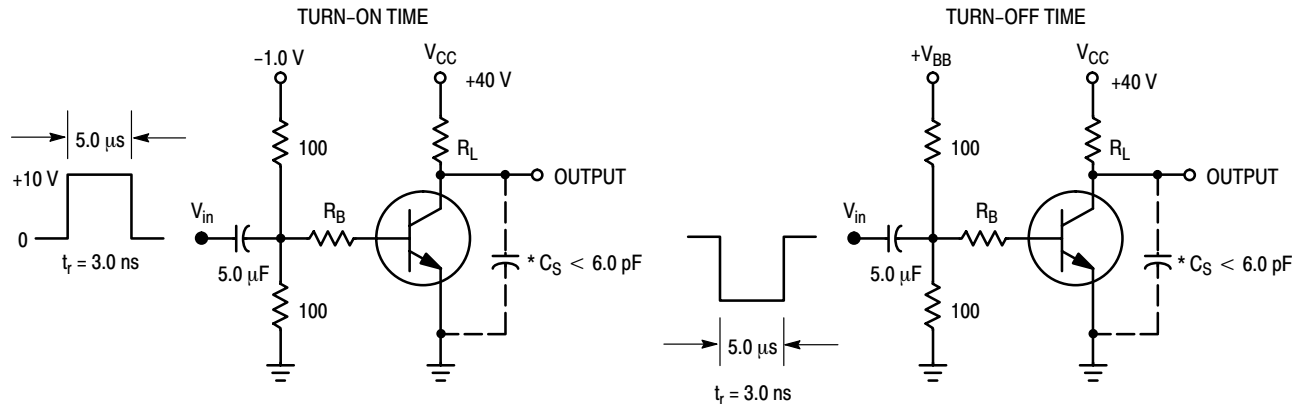


\*Total Shunt Capacitance of Test Jig and Connectors  
For PNP Test Circuits, Reverse All Voltage Polarities

Figure 1. Switching Time Test Circuits


# MPSA05, MPSA06, MPSA55, MPSA56

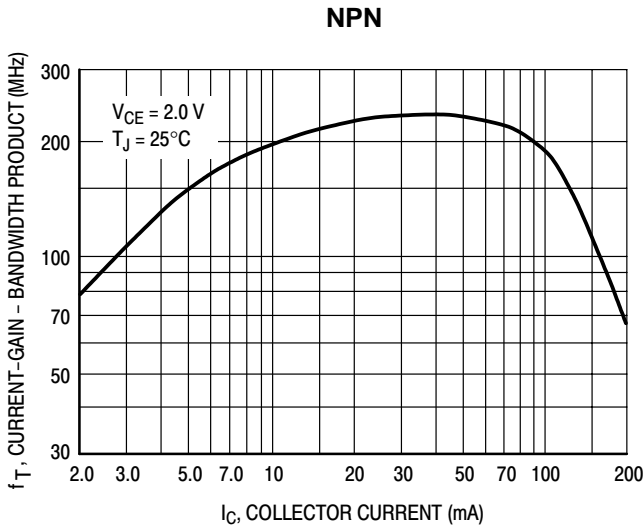


**Figure 2. MPSA05/06 Current-Gain — Bandwidth Product**

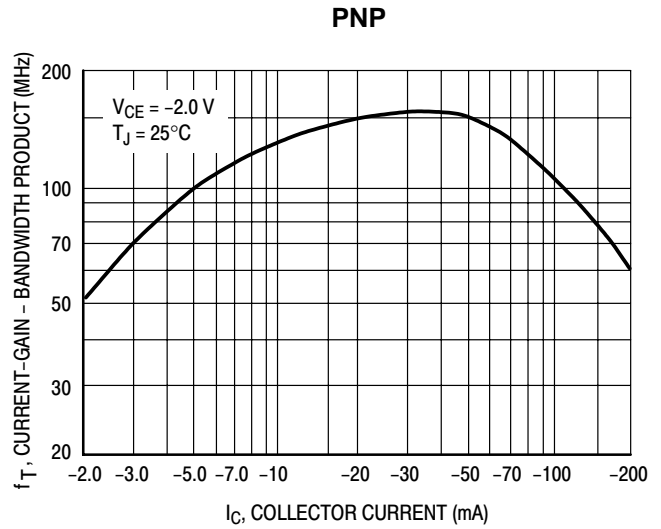


**Figure 3. MPSA55/56 Current-Gain — Bandwidth Product**

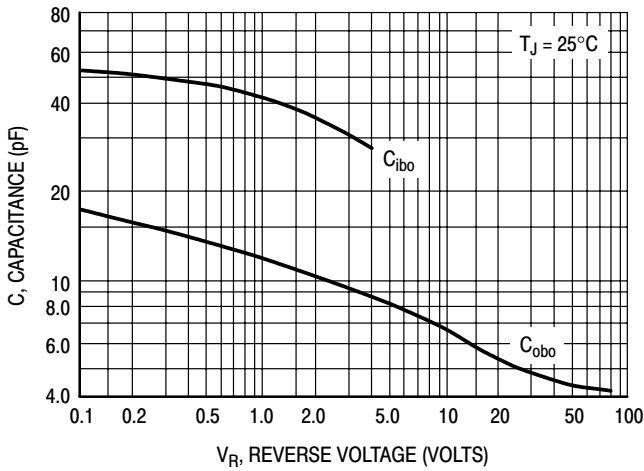


**Figure 4. MPSA05/06 Capacitance**

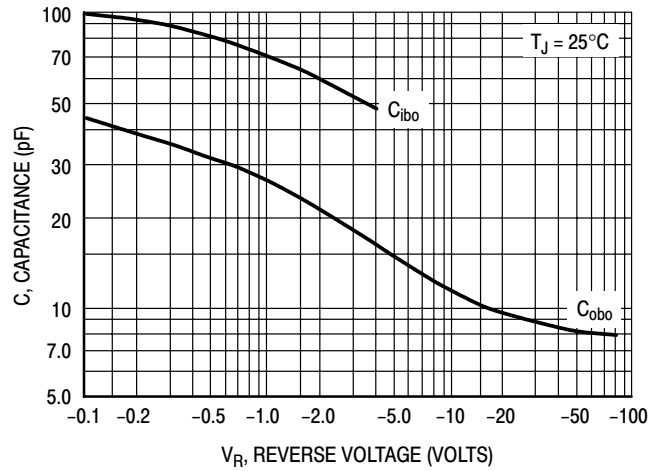

**Figure 5. MPSA55/56 Capacitance**

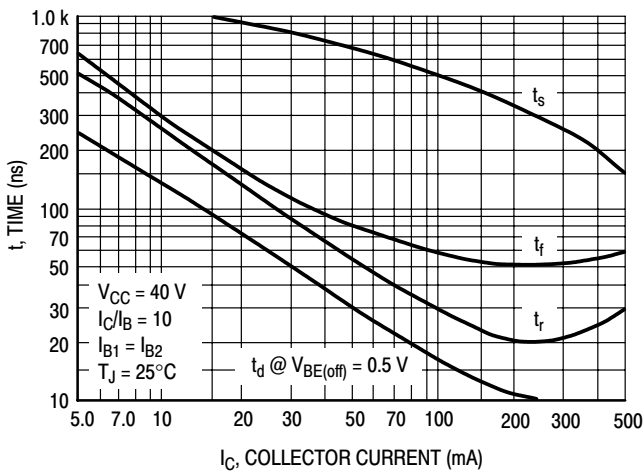

**Figure 6. MPSA05/06 Switching Time**

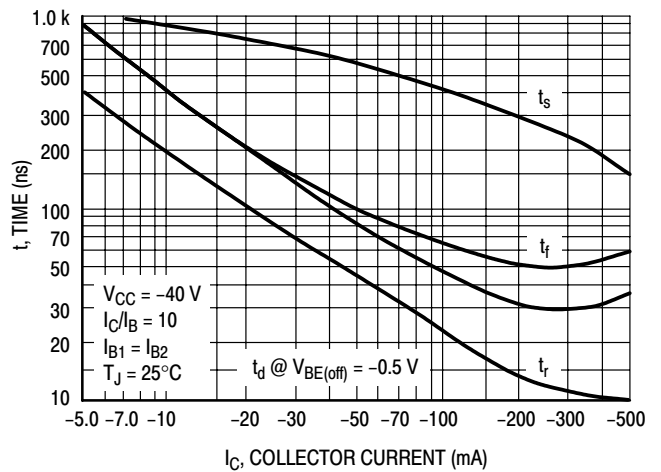

**Figure 7. MPSA55/56 Switching Time**

# MPSA05, MPSA06, MPSA55, MPSA56

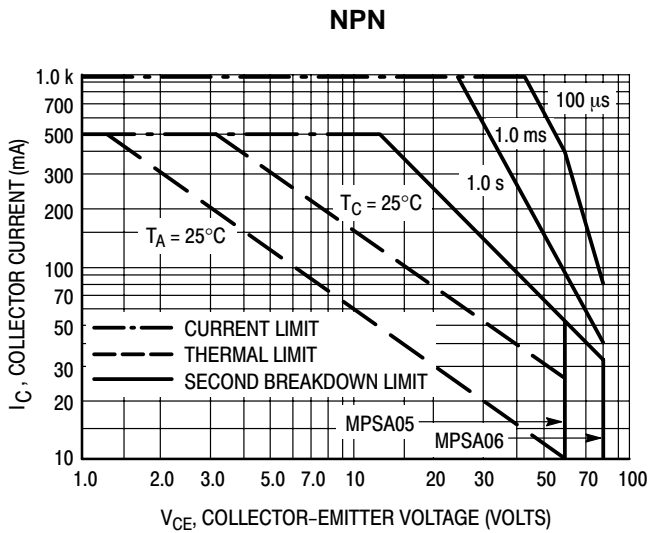


Figure 8. MPSA05/06 Active-Region Safe Operating Area

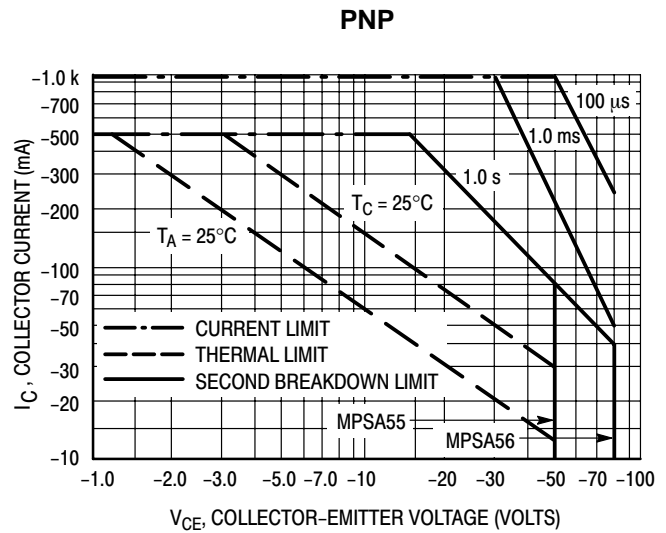


Figure 9. MPSA55/56 Active-Region Safe Operating Area

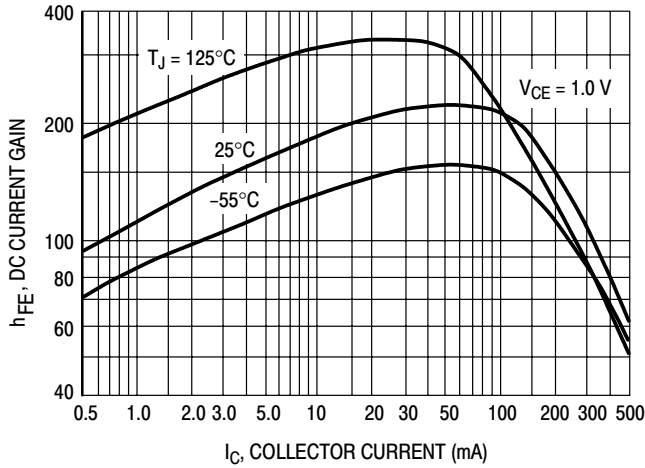


Figure 10. MPSA05/06 DC Current Gain

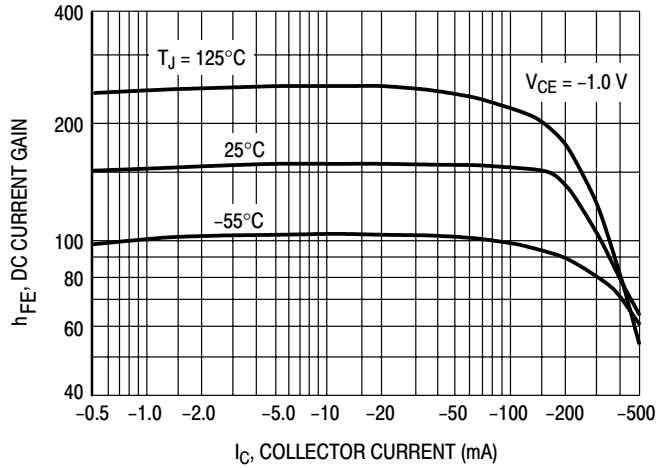


Figure 11. MPSA55/56 DC Current Gain

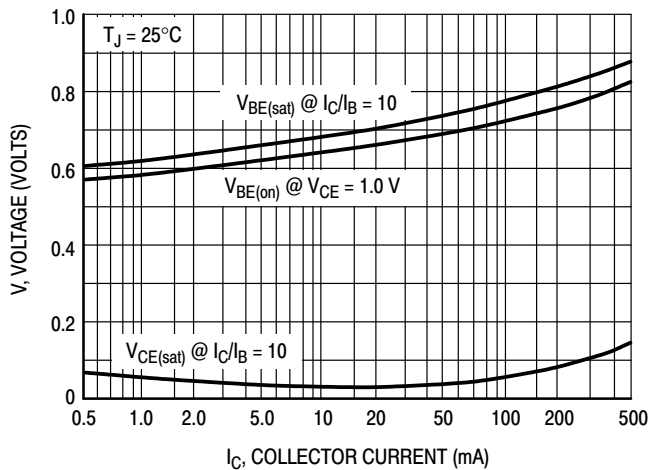


Figure 12. MPSA05/06 "ON" Voltages

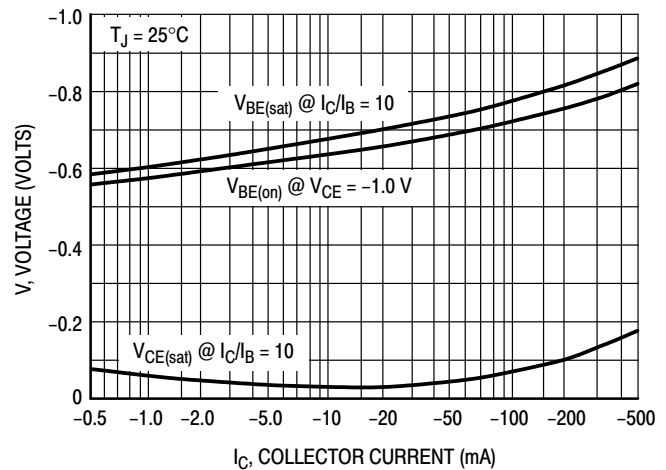


Figure 13. MPSA55/56 "ON" Voltages

# MPSA05, MPSA06, MPSA55, MPSA56

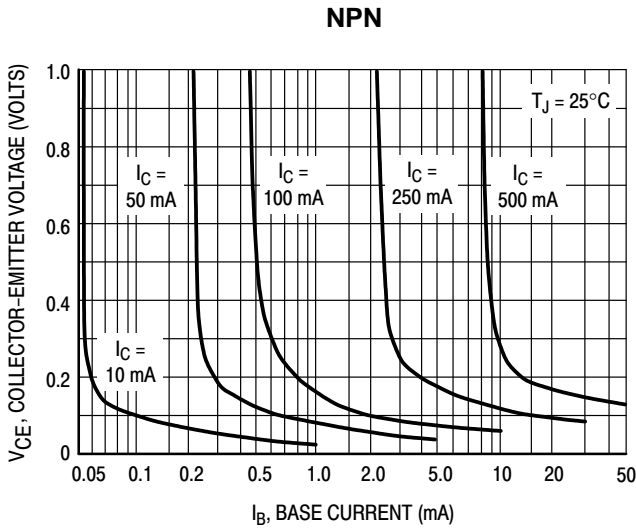


Figure 14. MPSA05/06 Collector Saturation Region

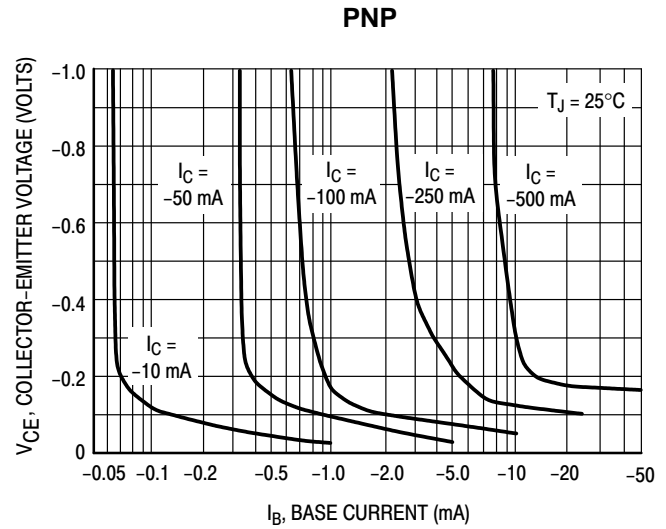


Figure 15. MPSA55/56 Collector Saturation Region

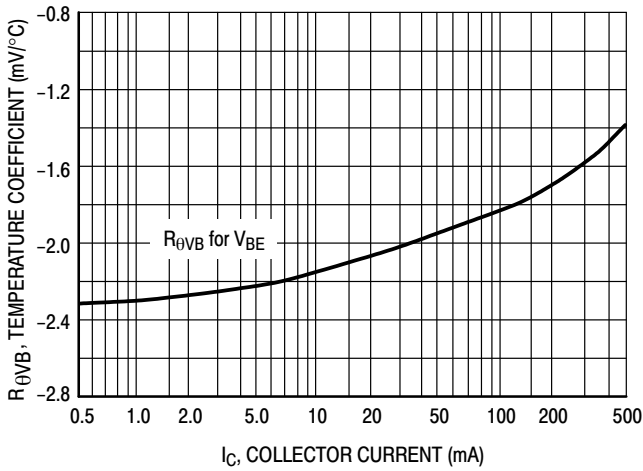


Figure 16. MPSA05/06 Base-Emitter Temperature Coefficient

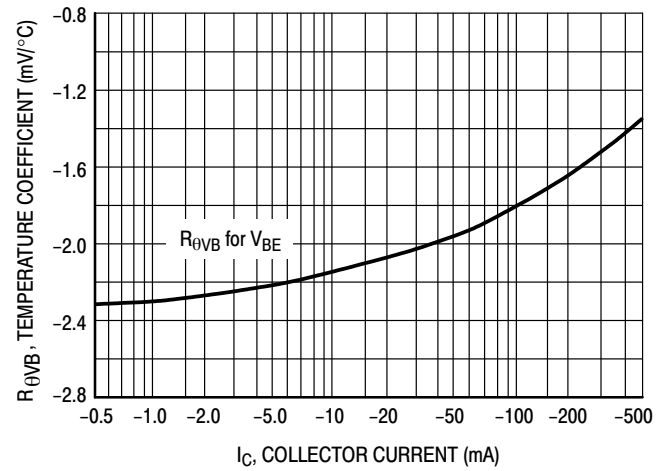


Figure 17. MPSA55/56 Base-Emitter Temperature Coefficient



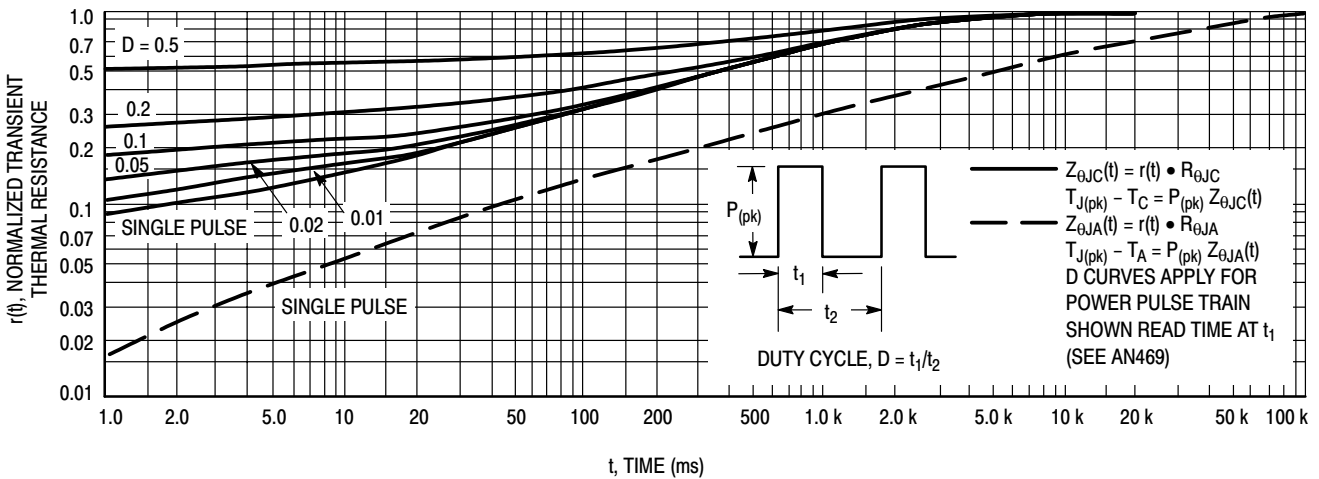


Figure 18. MPSA05, MPSA06, MPSA55 and MPSA56 Thermal Response

# MPSA05, MPSA06, MPSA55, MPSA56

## PACKAGE DIMENSIONS

TO-92  
TO-226AA  
CASE 29-11  
ISSUE AL

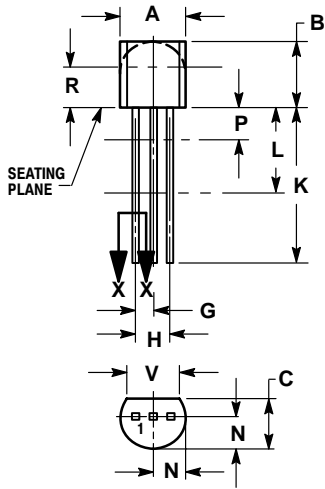

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	---	12.70	---
L	0.250	---	6.35	---
N	0.080	0.105	2.04	2.66
P	---	0.100	---	2.54
R	0.115	---	2.93	---
V	0.135	---	3.43	---

STYLE 1:

- PIN 1. EMITTER
2. BASE
3. COLLECTOR

STYLE 14:

- PIN 1. EMITTER
2. COLLECTOR
3. BASE

## Notes

## MPSA05, MPSA06, MPSA55, MPSA56

**ON Semiconductor** and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

### PUBLICATION ORDERING INFORMATION

**Literature Fulfillment:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031  
**Phone:** 81-3-5740-2700  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.



Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)