


Description

- For 1/4" x 1-1/4" (6.3mm x 32mm) fuses
- RoHS Compliant version available (-R option)
- Bolt-in and snap-in mounting available
- Tight cluster mounting
- All types of terminal configurations
- Clips made of spring-bronze
- Anti-rotational pin provided
- Flame retardant thermoplastic meets UL 94 VO


Environmental Data

- Temperature Rating (RTI): The mounting body for all devices (except those with Suffix -1-SNP or -W-SNP), has a temperature rating of 130°C. The mounting body for all devices with Suffix -1-SNP has a temperature rating of 110°C.

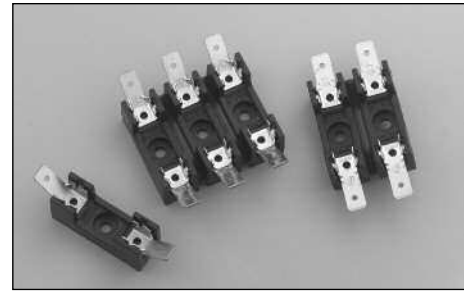

| SPECIFICATIONS | | |
|----------------|----------------------|----------------------|
| | Voltage Rating AC | Voltage Rating DC |
| S-8000 | 300V | 300V |
| S-8100 | 300V | 300V |
| S-8200 | 300V | 300V |
| S-8300 | 300V | 300V |


Multiple Pole




| No. of Poles | Dimensions Inches | | Dimensions Millimeters | |
|--------------|----------------------|--------|---------------------------|-------|
| | A | B | A | B |
| 1 | * | * | * | * |
| 2 | 1 1/8" | 5/8" | 28.6 | 15.9 |
| 3 | 1 3/4" | 1 1/4" | 44.4 | 31.8 |
| 4 | 2 3/8" | 1 7/8" | 60.3 | 47.6 |
| 5 | 3" | 2 1/2" | 76.2 | 63.5 |
| 6 | 3 5/8" | 3 1/8" | 92.1 | 79.4 |
| 7 | 4 1/4" | 3 3/4" | 108 | 95.2 |
| 8 | 4 7/8" | 4 3/8" | 123.8 | 111.1 |
| 9 | 5 1/2" | 5" | 139.7 | 127.0 |
| 10 | 6 1/8" | 5 5/8" | 155.6 | 142.9 |
| 11 | 6 3/4" | 6 1/4" | 171.4 | 158.8 |
| 12 | 7 3/8" | 6 7/8" | 187.3 | 174.6 |

Dimensions

S-8000 Single Pole Bolt-In Mounting Series

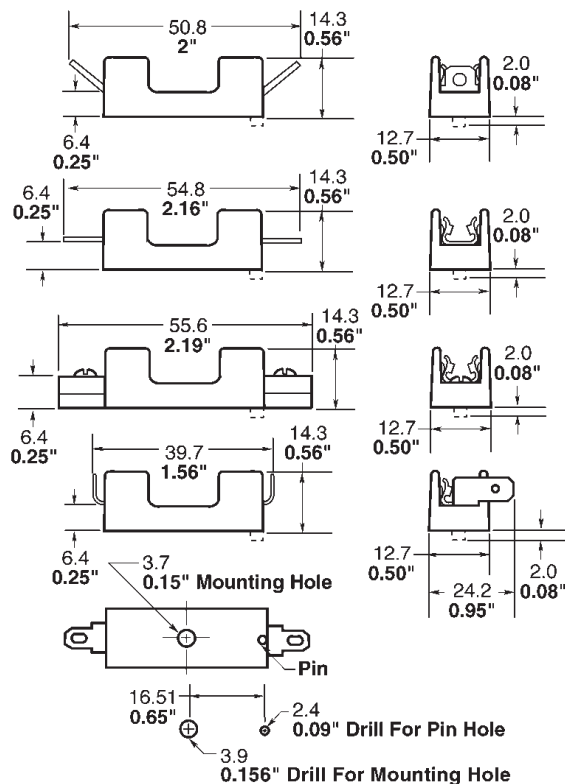

S-8000 Single Pole Snap-In Mounting Series

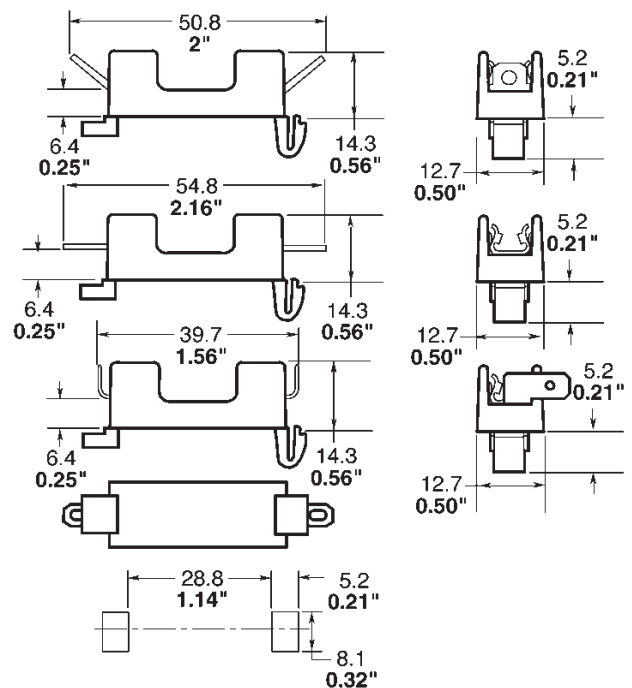

| Component | Material |
|-----------|--------------------------------------|
| Clip | Spring-Bronze, Bright Tin-Lead Plate |
| Body | Thermoplastic |

| PACKAGING CODE | |
|----------------|--|
| Packaging Code | Description |
| Blank | Varies with number of poles. Contact customer service. |
| BK/ | Varies with number of poles. Contact customer service. |

Example: BK/S-8001-01-SNP

| | | | | | | | | |
|------------|------------|----------|-----------|---|-----------|---|------------|-----------|
| <u>BK/</u> | <u>S-8</u> | <u>0</u> | <u>01</u> | - | <u>01</u> | - | <u>SNP</u> | <u>-R</u> |
| ↓ | ↓ | ↓ | ↓ | | ↓ | | ↓ | ↓ |
| 1 | 2 | 3 | 4 | | 5 | | 6 | 7 |

1. Packaging Code: BK/
2. Series Number: S-8
3. Type Terminal:
 - 0 = Solder
 - 1 = 3/16" Quick Connect
 - 2 = 1/4" Quick Connect
 - 3 = Screw
4. Terminal Angle:
 - 01 = Straight (0°)
 - 02 = 40° Angle
 - 03 = Side*
5. Number of Poles:
 - (01 – 12)
 - 1X = One pole, No Mounting Stud
6. Mounting Style: SNP = Snap-in Mounting
7. RoHS Compliant Version -R

*Available only in single pole

North America

Cooper Electronic Technologies
3601 Quantum Boulevard
Boynton Beach, FL 33426-8638
Tel: 1-561-752-5000
Fax: 1-561-742-0134
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-800-544-2570

Europe

Cooper Electronic Technologies
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Asia Pacific

Cooper Electronic Technologies
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160