

SHINDENGEN

Schottky Rectifiers (SBD)

Single

S2S6M**60V 1.3A**

FEATURES

- $T_j 150^{\circ}\text{C}$
- P_{RRSM} avalanche guaranteed
- 1.0 ϕ lead


APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

Case : AX10

Unit : mm

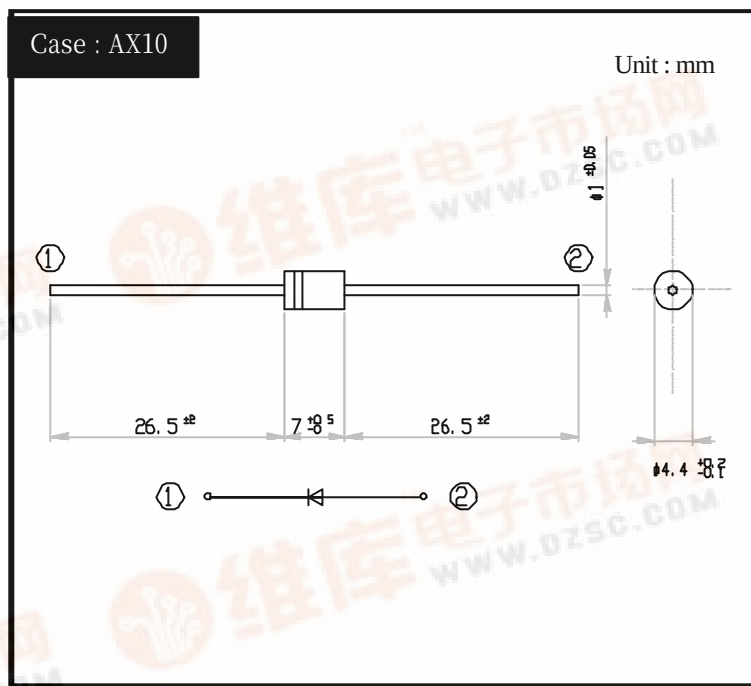

RATINGS

● Absolute Maximum Ratings (If not specified $T_l=25^{\circ}\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40~150	$^{\circ}\text{C}$
Operating Junction Temperature	T_j		150	$^{\circ}\text{C}$
Maximum Reverse Voltage	V_{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	I_O	50Hz sine wave, R-load, $T_a=52^{\circ}\text{C}$	1.3	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25^{\circ}\text{C}$	60	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μs , $T_j=25^{\circ}\text{C}$	160	W

● Electrical Characteristics (If not specified $T_l=25^{\circ}\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=2\text{A}$, Pulse measurement	Max.0.58	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.2	mA
Junction Capacitance	C_j	$f=1\text{MHz}$, $V_R=10\text{V}$	Typ.120	pF
Thermal Resistance	θ_{jl}	junction to lead	Max.8	$^{\circ}\text{C/W}$
	θ_{ja}	junction to ambient	Max.86	


S2S6M

Forward Voltage

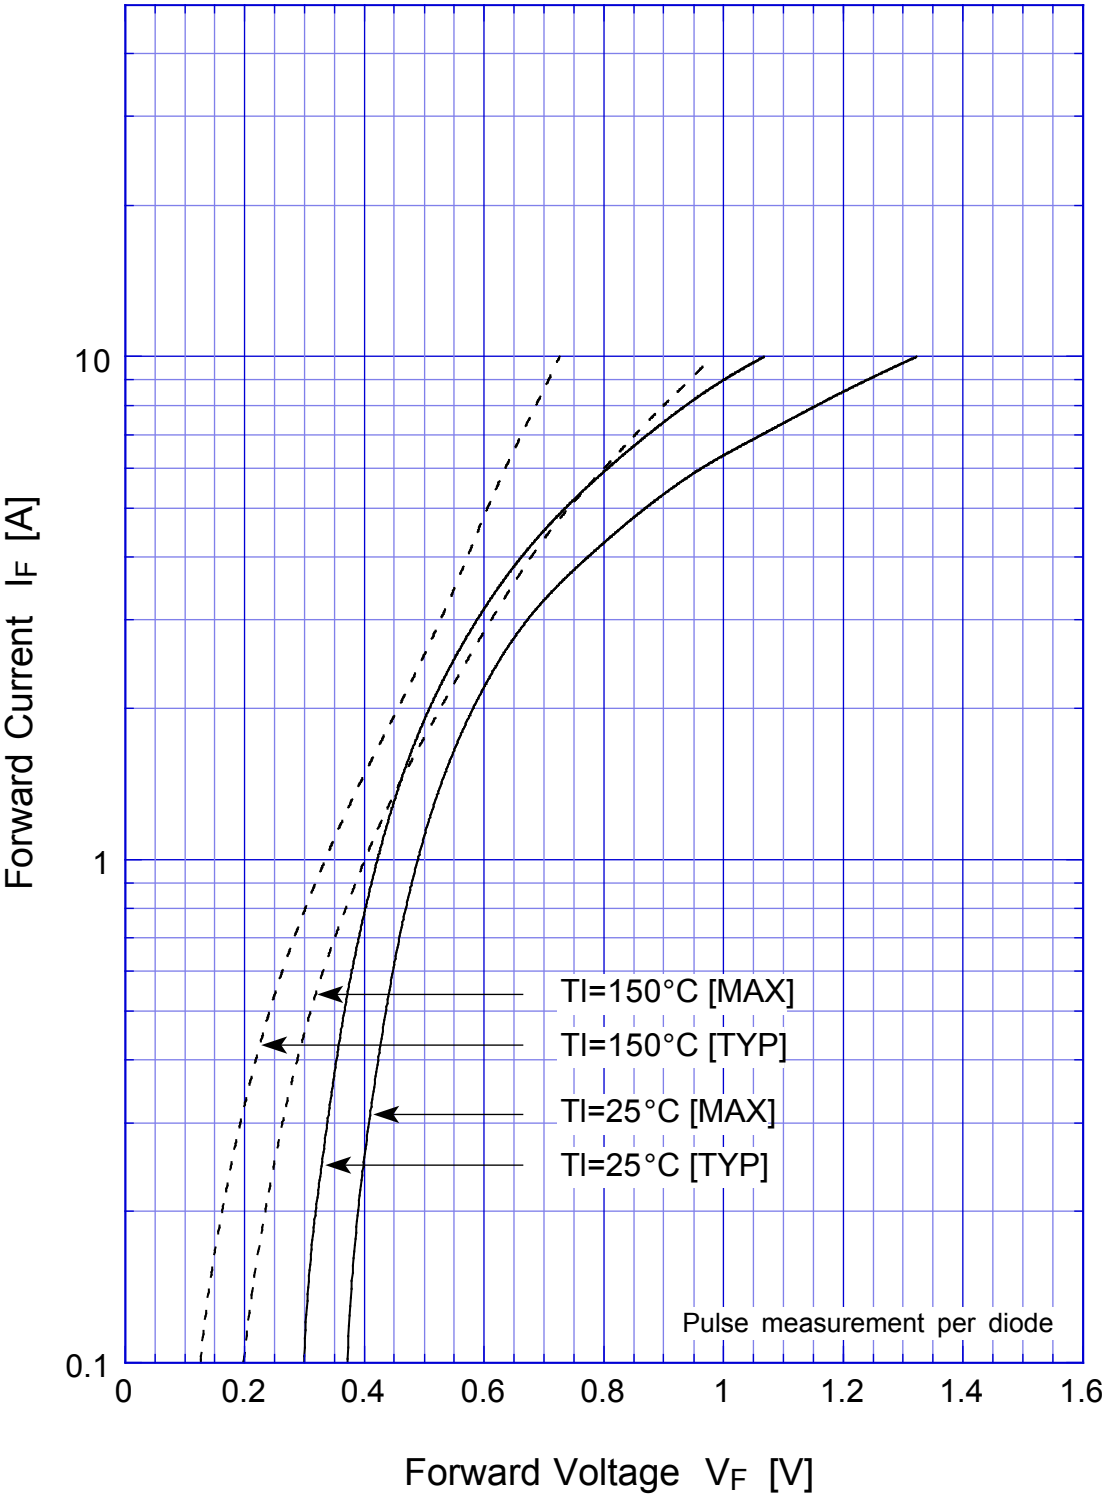


S2S6M

Junction Capacitance

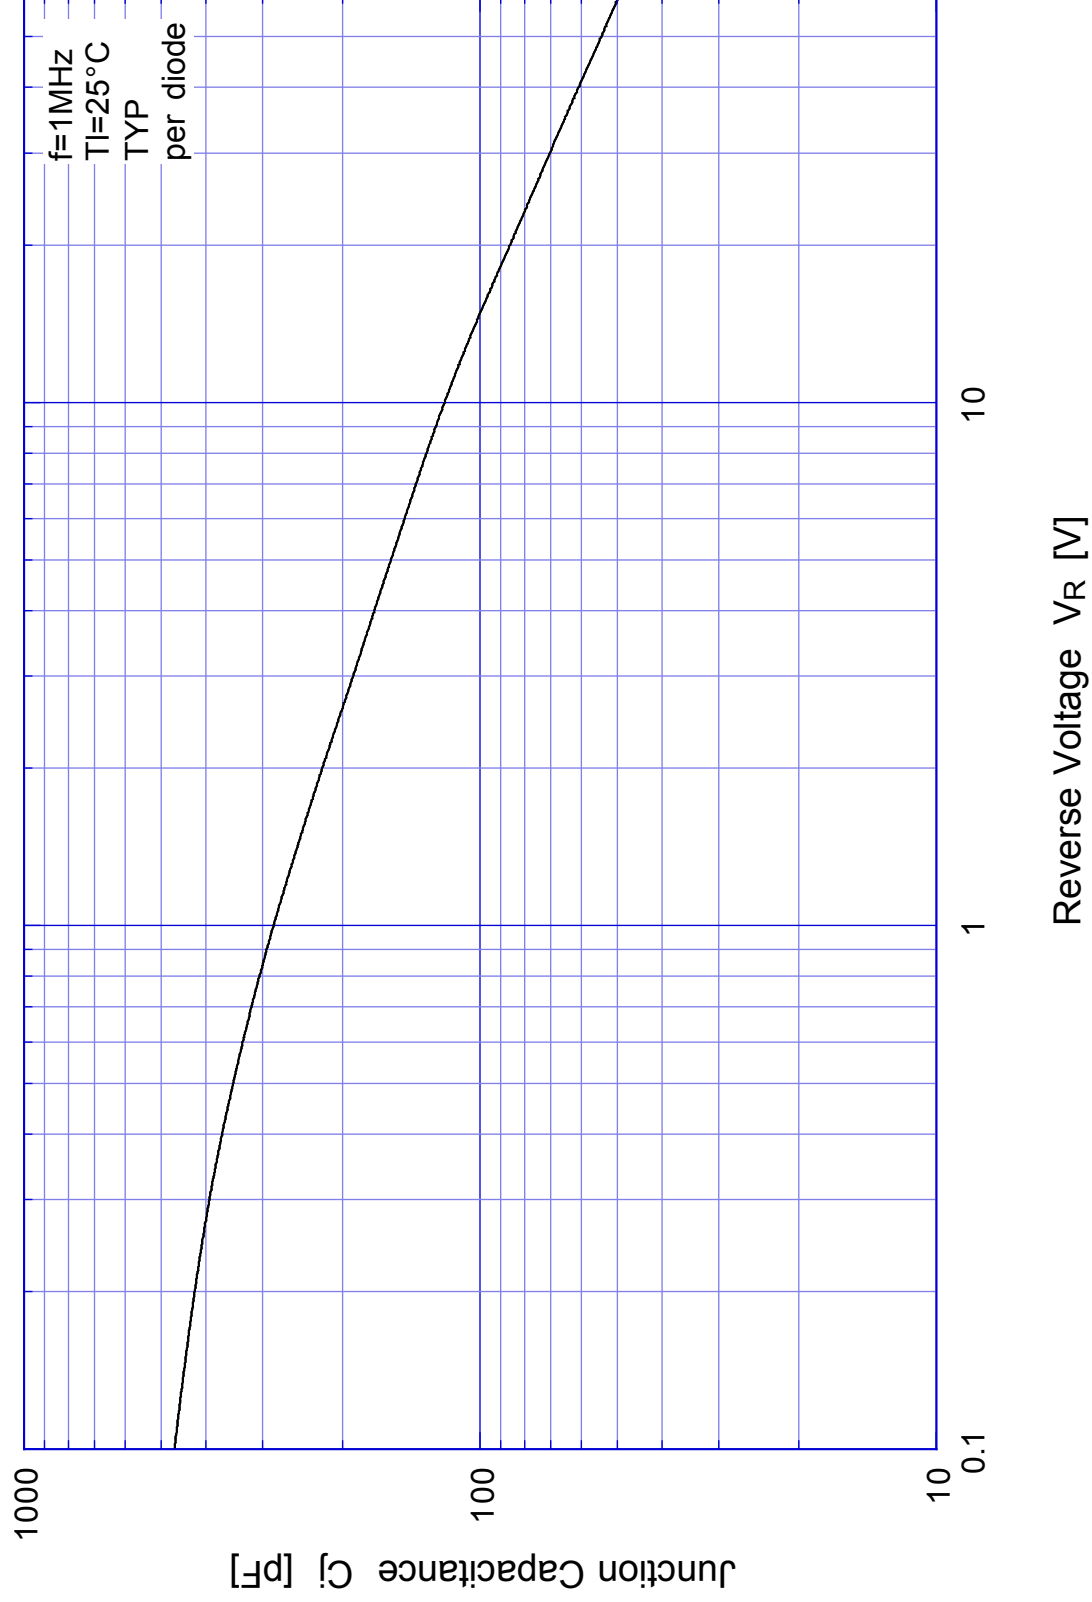


S2S6M

Reverse Current

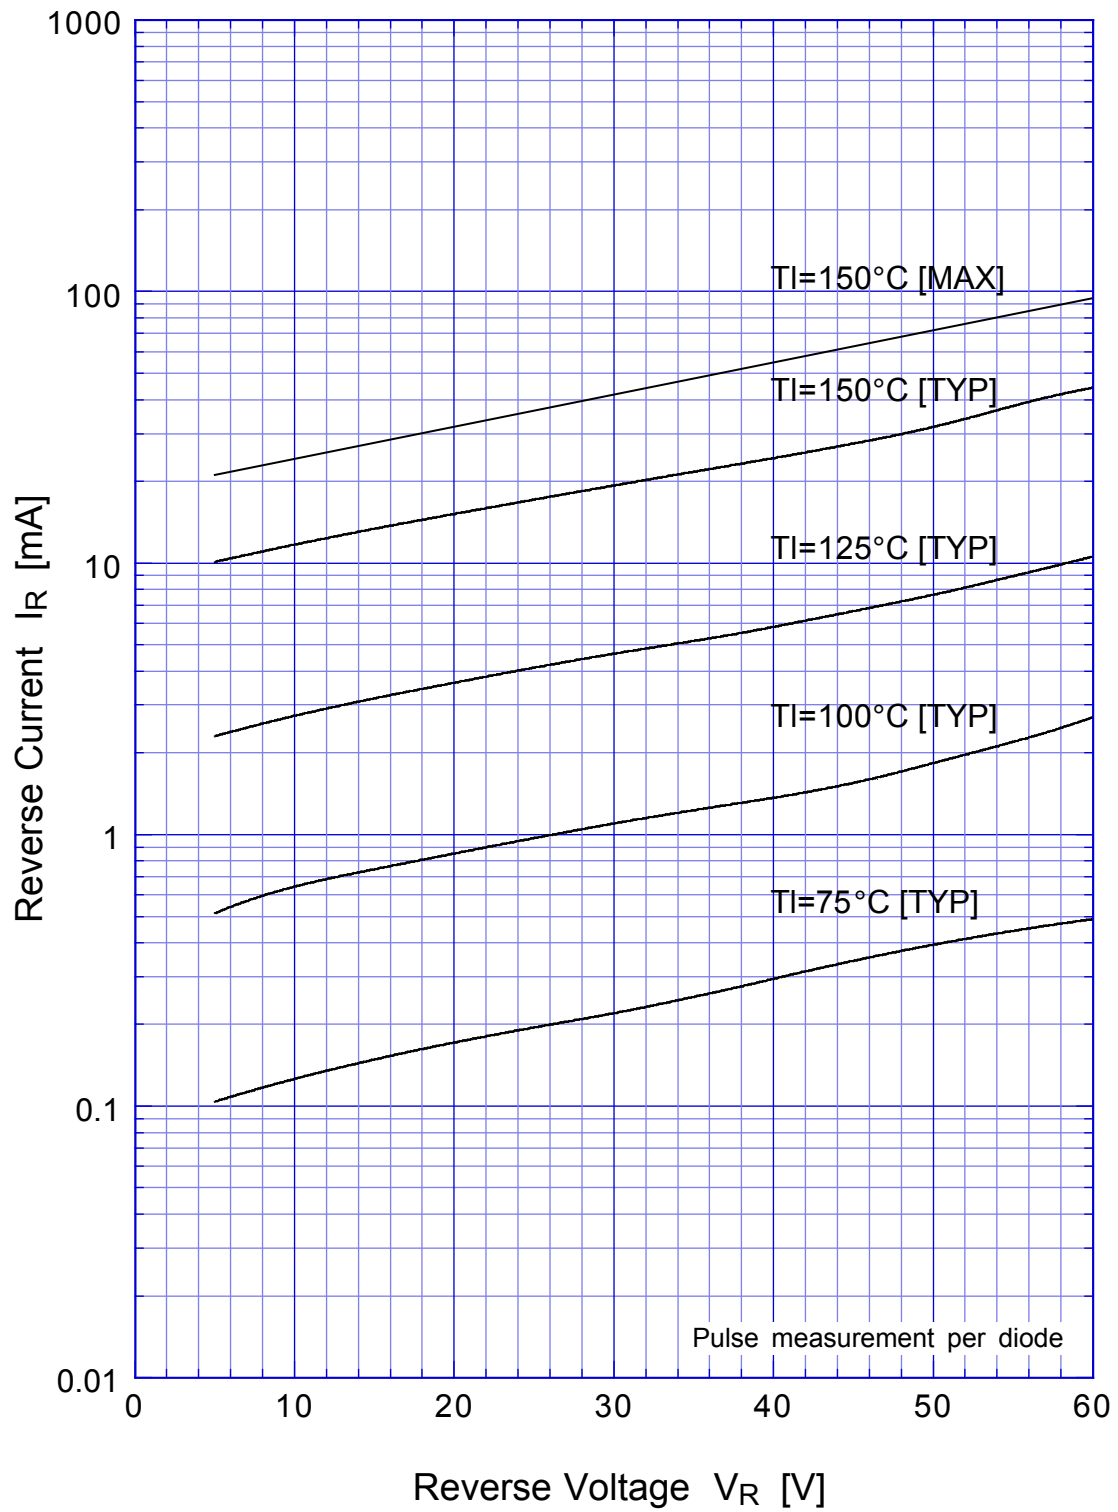


S2S6M

Reverse Power Dissipation

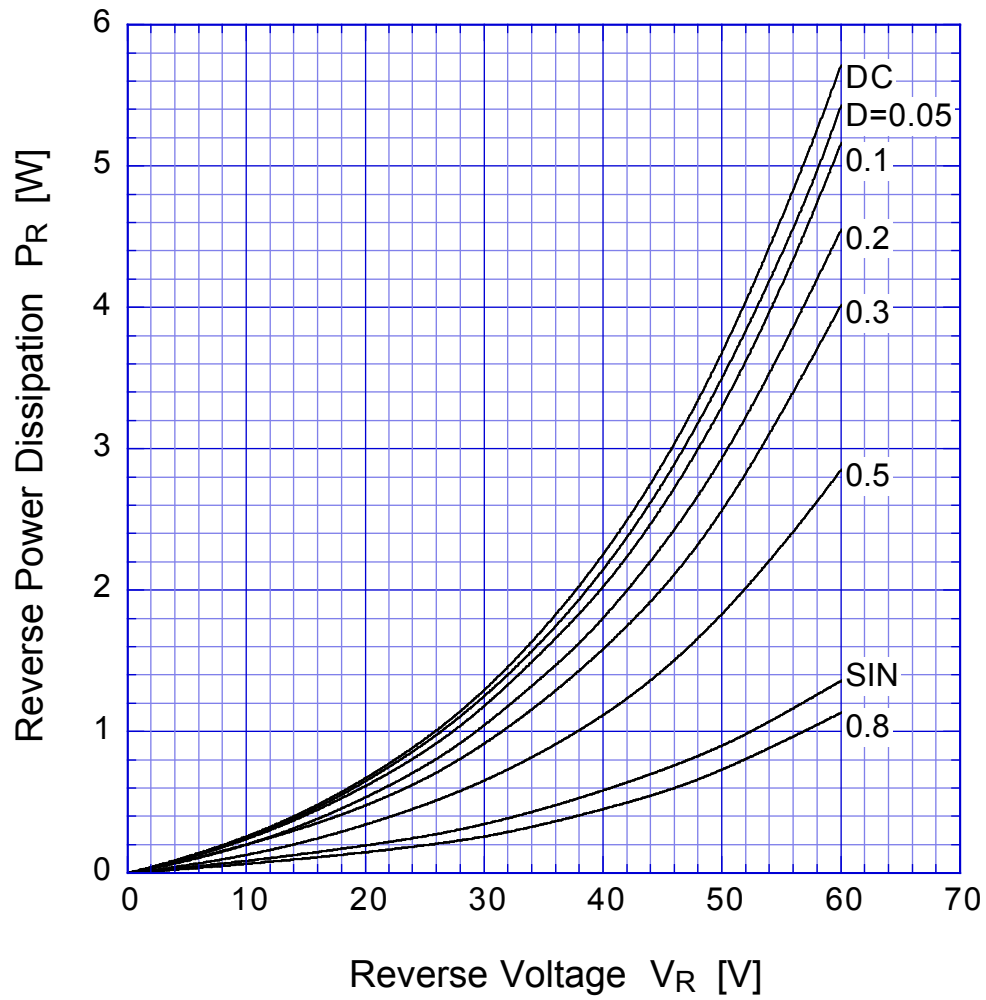


$T_j = 150^\circ\text{C}$

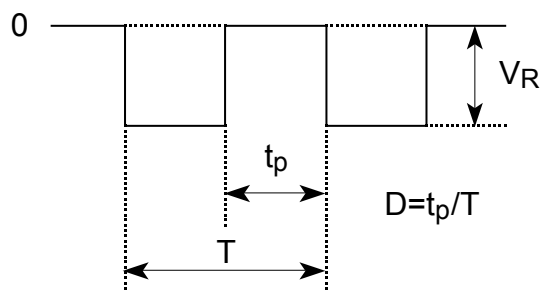


S2S6M

Forward Power Dissipation

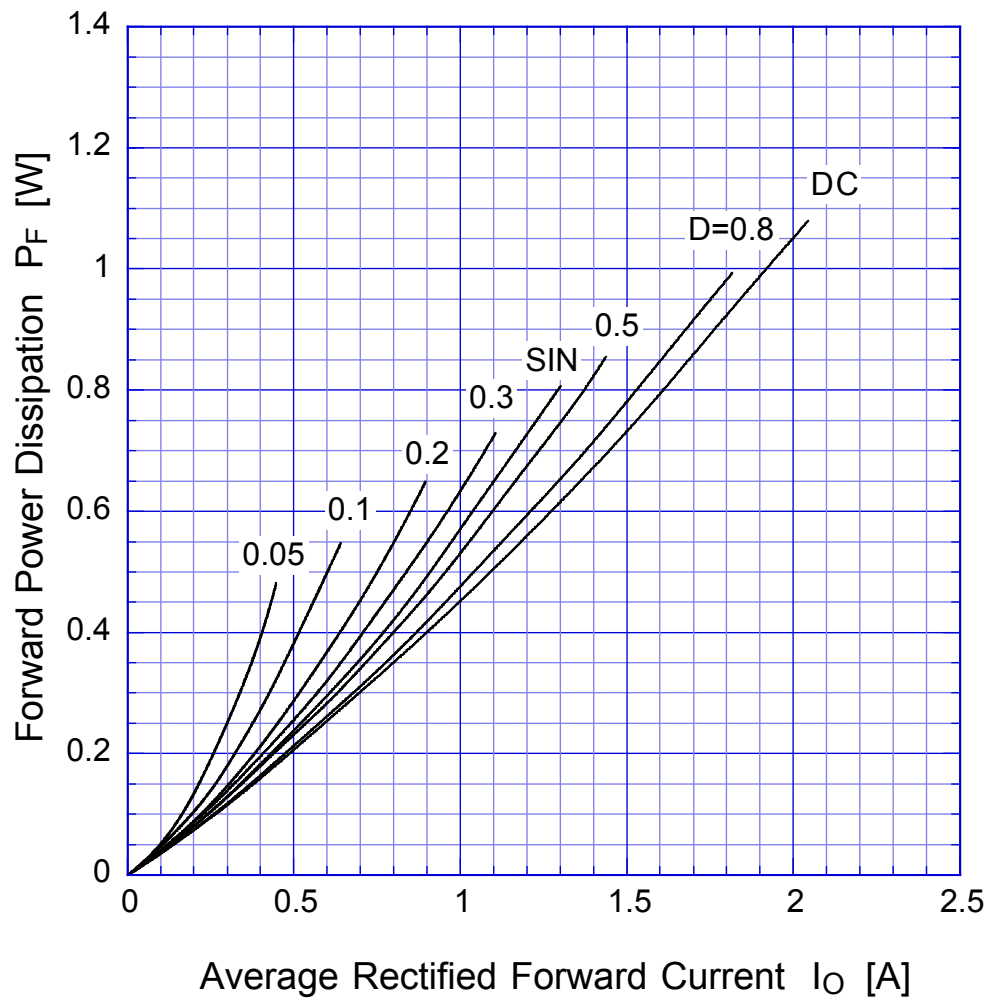


$T_j = 150^\circ\text{C}$

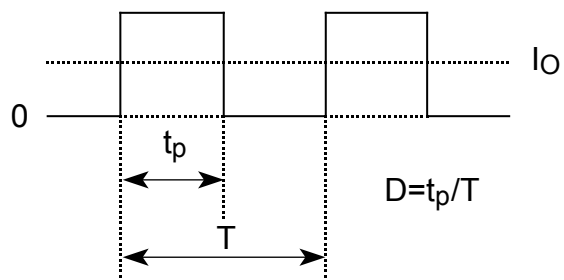


S2S6M

Derating Curve

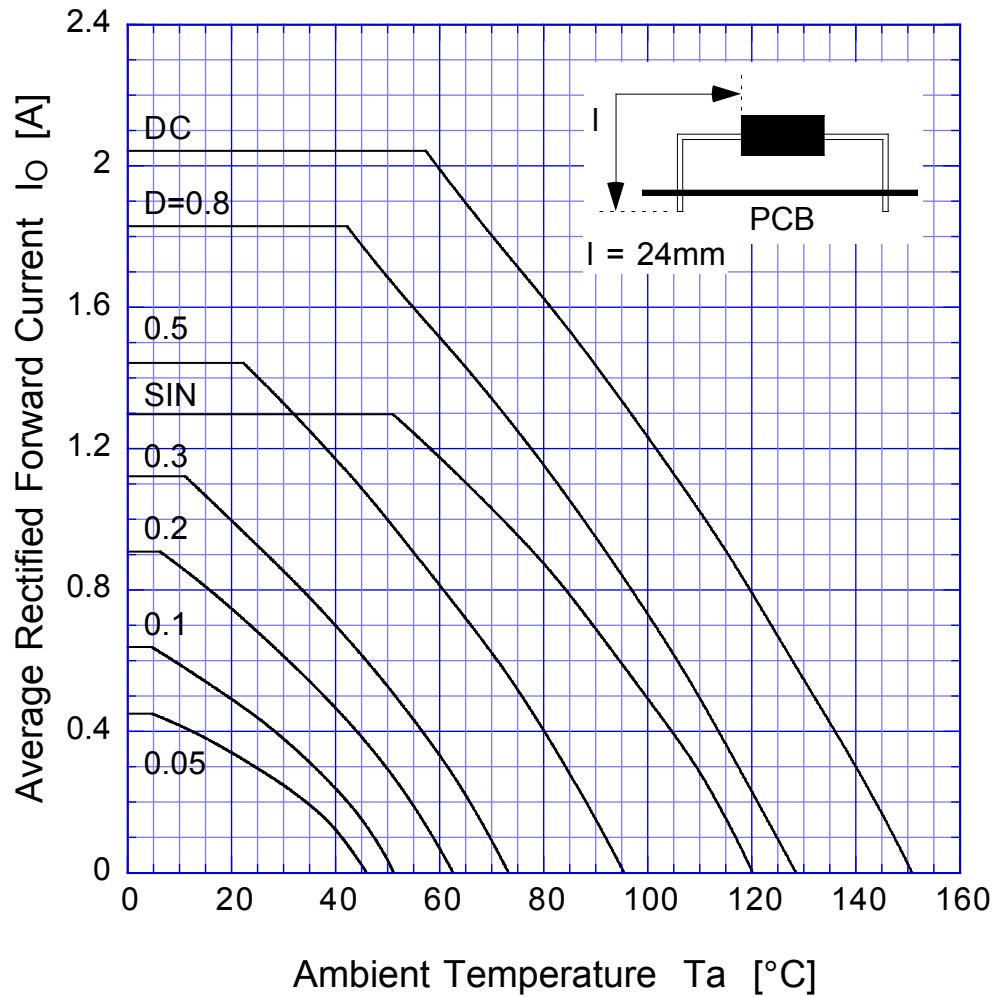


$V_R = 30\text{V}$


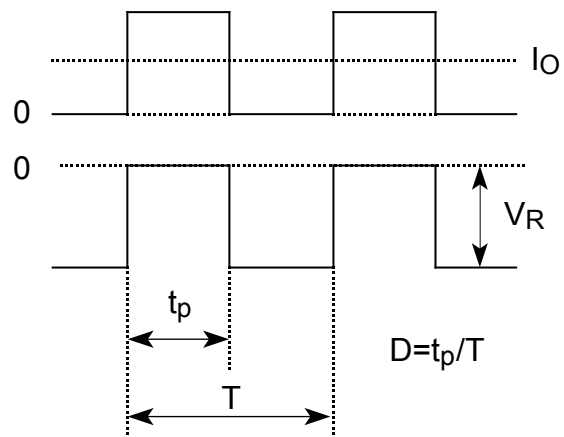


S2S6M

Peak Surge Forward Capability

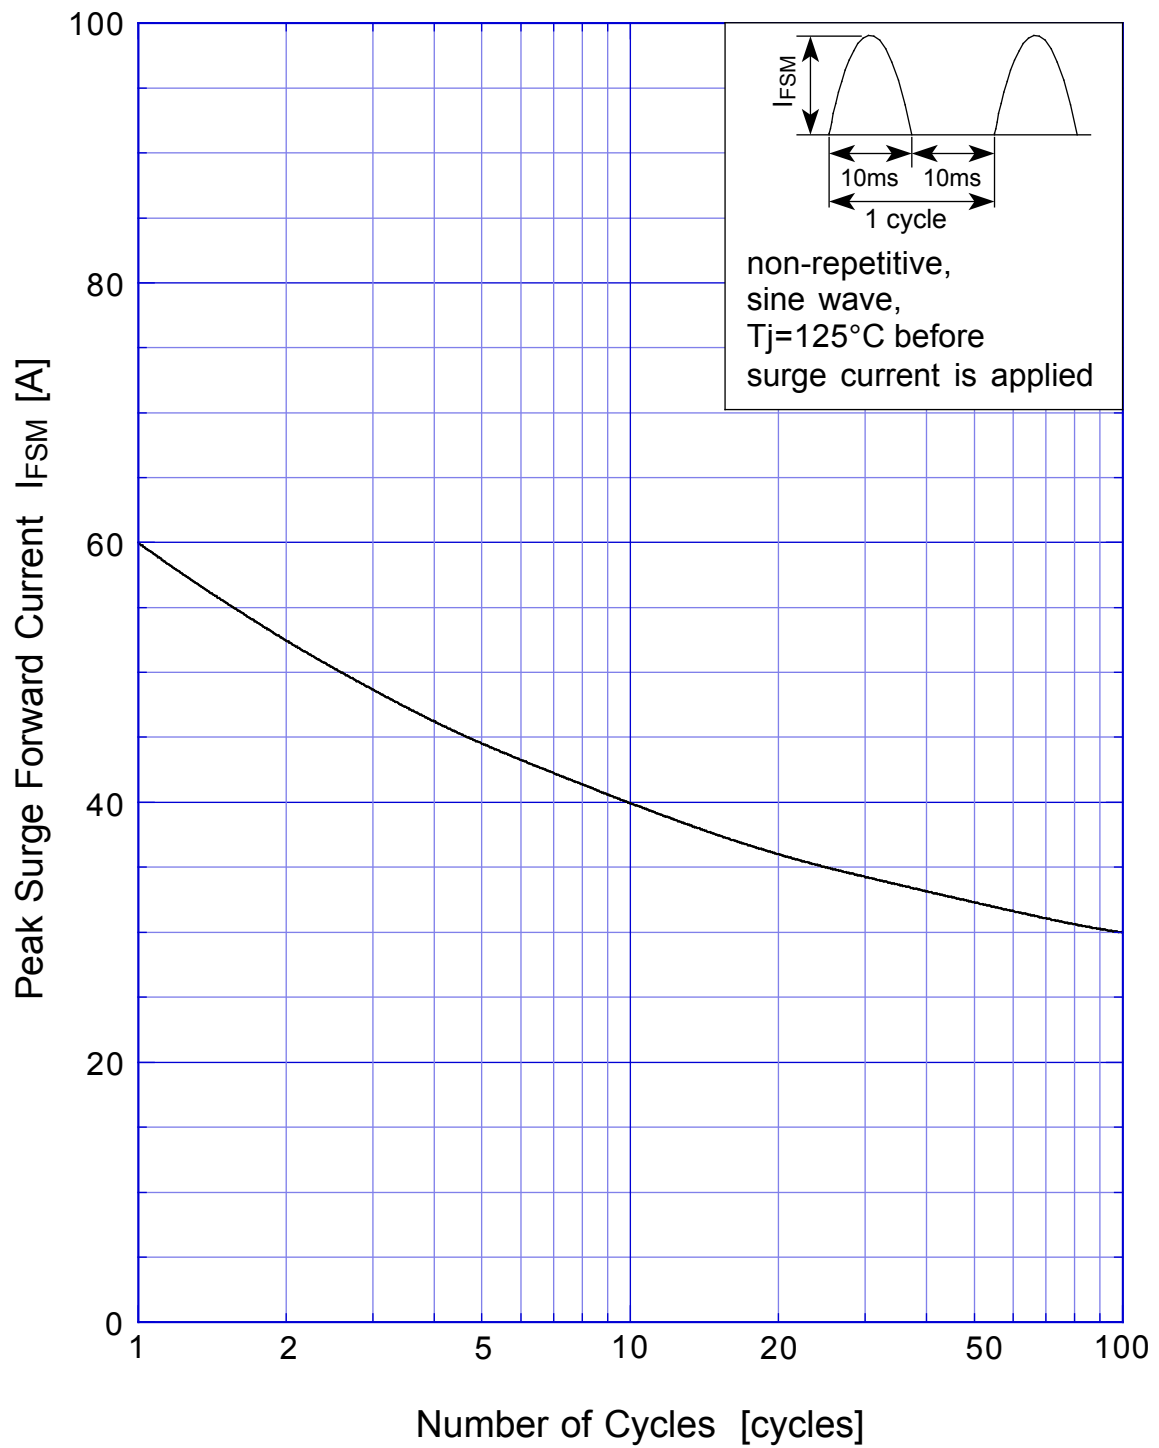

SBD Repetitive Surge Reverse Power Derating Curve

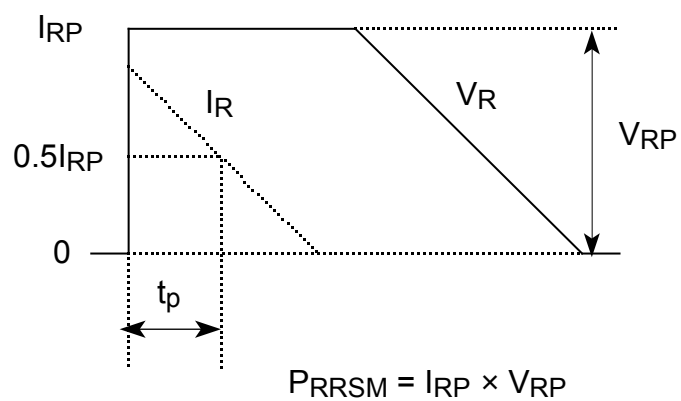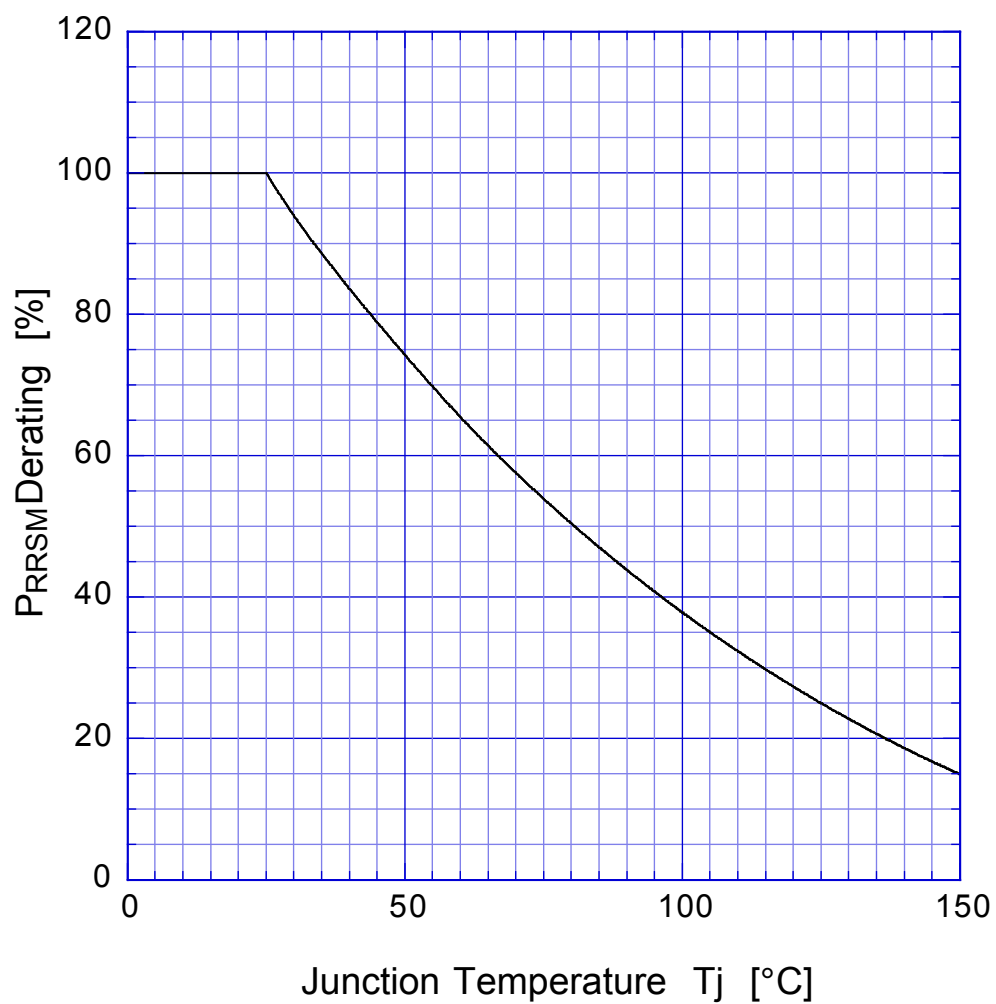

SBD

Repetitive Surge Reverse Power Capability

