



## S30D70 Thru S30D100


### Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

- \* Low Forward Voltag.
- \* Low Switching noise.
- \* High Current Capacity
- \* Guarantee Reverse Avalance.
- \* Guard-Ring for Stress Protection.
- \* Low Power Loss & High efficiency.
- \* 125°C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Cnduction.
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

#### SCHOTTKY BARRIER RECTIFIERS


**30 AMPERES  
70 -- 100 VOLTS**



TO-247 (3P)

### MAXIMUM RATINGS


Characteristic	Symbol	S30D				Unit
		70	80	90	100	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	70	80	90	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	49	56	63	70	V
Average Rectifier Forward Current Total Device	$I_{F(AV)}$	15 30				A
Peak Repetitive Forward Current ( Rate $V_R$ , Square Wave, 20kHz )	$I_{FRM}$	30				A
Non-Repetitive Peak Surge Current ( Surge applied at rate load conditions halfware, single phase, 60Hz )	$I_{FSM}$	275				A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	- 65 to + 125				°C



DIM	MILLIMETERS	
	MIN	MAX
A	--	16.2
B	1.7	2.7
C	5.0	6.0
D	--	23.0
E	14.8	15.2
F	11.7	12.7
G	--	4.5
H	--	2.5
I	--	3.5
J	1.1	1.4
K	5.25	5.65
L	19	--
M	4.7	5.3
N	2.8	3.2
O	0.45	0.85

### ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	S30D				Unit
		70	80	90	100	
Maximum Instantaneous Forward Voltage ( $I_F=15$ Amp, $T_C = 25$ °C ) ( $I_F=15$ Amp, $T_C = 100$ °C )	$V_F$	0.75 0.69		0.85 0.75		V
Maximum Instantaneous Reverse Current ( Rated DC Voltage, $T_C = 25$ °C ) ( Rated DC Voltage, $T_C = 100$ °C )	$I_R$	5.0 80				mA



# S30D70 , S30D80

FIG-1 FORWARD CURRENT DERATING CURVE

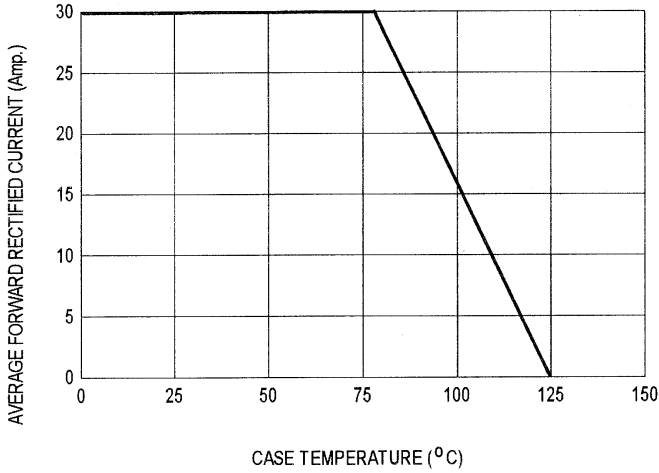


FIG-2 TYPICAL FORWARD CHARACTERISTICS

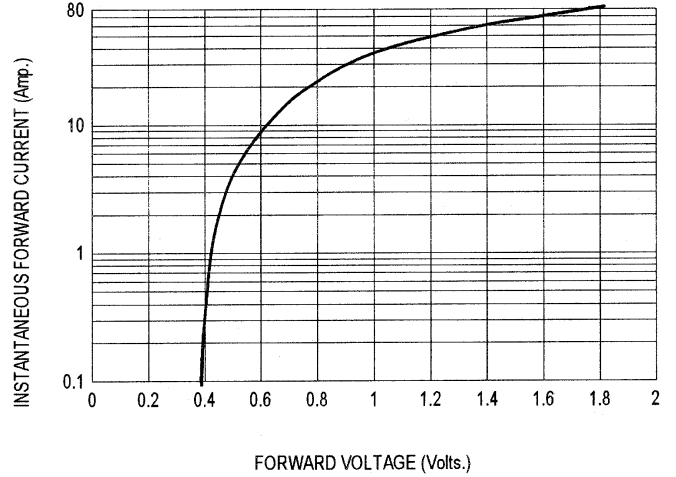


FIG-3 TYPICAL REVERSE CHARACTERISTICS

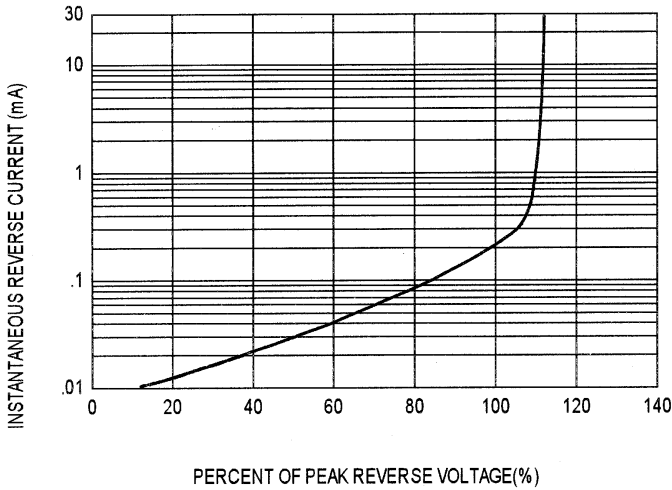


FIG-4 TYPICAL JUNCTION CAPACITANCE


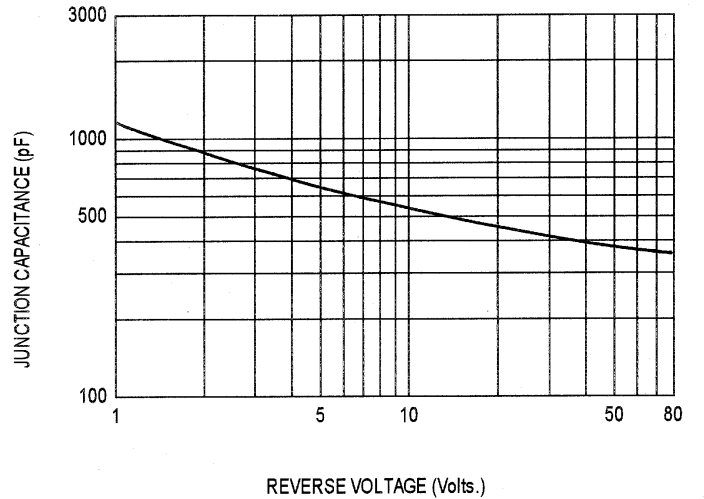


FIG-5 PEAK FORWARD SURGE CURRENT

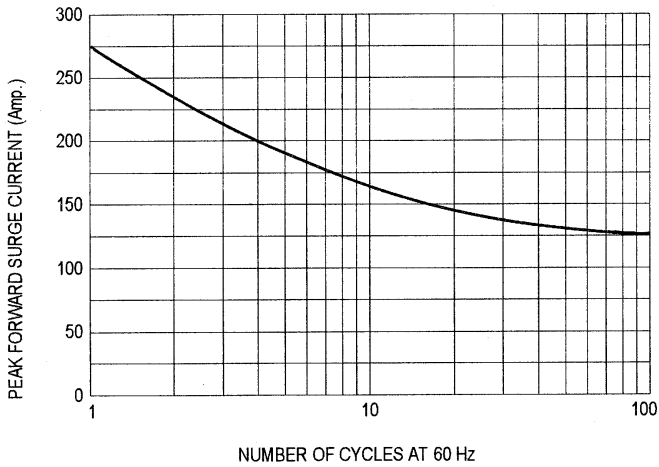

# S30D90 , S30D100

FIG-1 FORWARD CURRENT DERATING CURVE

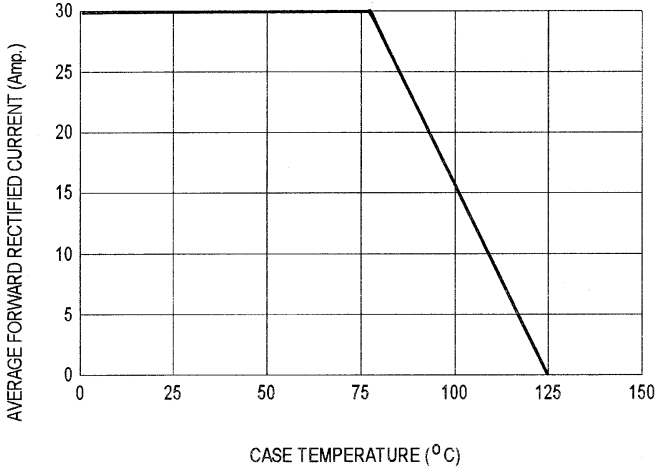


FIG-2 TYPICAL FORWARD CHARACTERISTICS

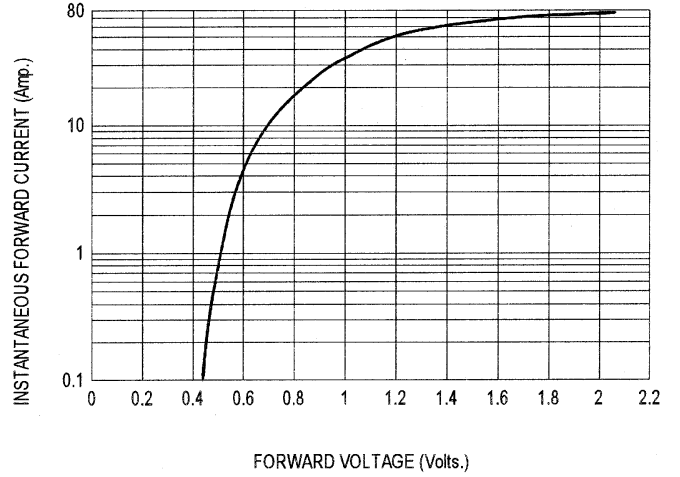


FIG-3 TYPICAL REVERSE CHARACTERISTICS

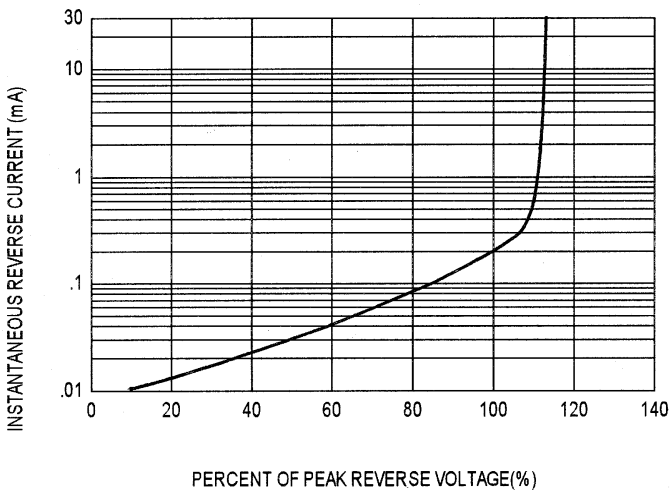


FIG-4 TYPICAL JUNCTION CAPACITANCE

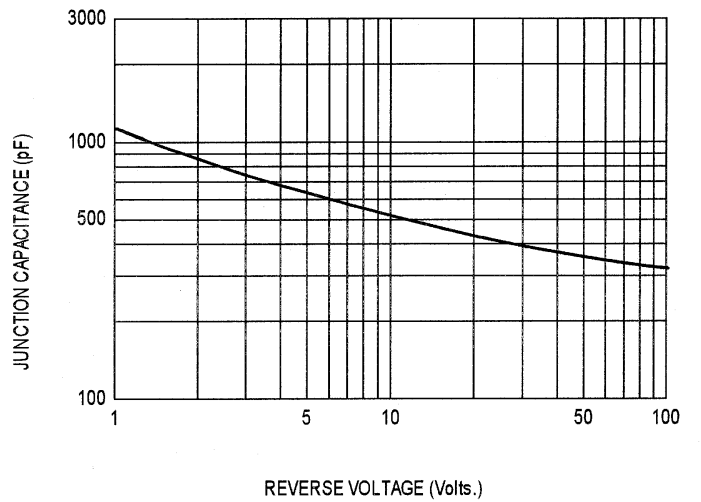


FIG-5 PEAK FORWARD SURGE CURRENT

