

NEC

6 PIN DIP LOW OUTPUT CAPACITANCE, LOW ON-STATE RESISTANCE, SOLID STATE RELAY

PS7341B-1B
PS7341BL-1B

FEATURES

- **HIGH ISOLATION VOLTAGE**
BV = 3,750 Vr.m.s.
- **1 CHANNEL TYPE**
1 B output
- **DESIGNED FOR AC/DC SWITCHING LINE CHANGER**
- **SMALL PACKAGE**
6 pin DIP
- **LOW OUTPUT CAPACITANCE**
Cout = 50 pF TYP
- **LOW ON-STATE RESISTANCE**
Ron2 = 35 Ω TYP
- **LOW LED OPERATING CURRENT**
IF = 2 mA
- **LOW OFFSET VOLTAGE**
- **SURFACE MOUNT TYPE LEAD AVAILABLE**
PS7341BL-1B

DESCRIPTION

The PS7341B-1B and PS7341BL-1B are solid state relays containing a GaAs LED on the light emitting side (input side) and normally close (N.C.) contact MOSFETs on the output side. They are suitable for analog signal control because of their low offset and high linearity.

APPLICATIONS


- EXCHANGE EQUIPMENT
- MEASUREMENT EQUIPMENT
- FA/OA EQUIPMENT

ELECTRICAL CHARACTERISTICS (TA = 25°C)


PART NUMBER				PS7341-1B, PS7341L-1B		
SYMBOLS		PARAMETERS	UNITS	MIN	TYP	MAX
Diode	VF	Forward Voltage, IF = 10 mA	V		1.2	1.4
	IR	Reverse Current, VR = 5 V	μA			5.0
MOS FET	ILOFF	Off-State Leakage Current, IF = 10 mA, VD = 400 V	μA			10
	COUT	Output Capacitance, IF = 10 mA, VD = 0 V, f = 1 MHz	pF		50	
Coupled	RON1	On-State Resistance, IL = 0 mA, IL = 10 mA	Ω		50	70
	RON2	On-State Resistance, IL = 0 mA, IL = 90 mA, t ≤ 10 ms	Ω		35	55
	TON	Turn-On Time ¹	ms			0.2
	TOFF	Turn-Off Time ¹	ms			1.5
	RI-O	Isolation Resistance, VI-o = 1.0 kVdc	Ω	10 ⁹		
	CI-O	Isolation Capacitance, V = 0 V, f = 1 MHz	pF		1.1	

Notes:

1. Test Circuit for switching Time

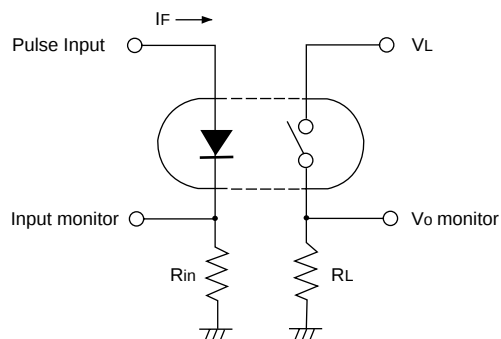

PS7341B-1B, PS7341BL-1B




ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
			PS7341B-1B
			PS7341BL-1B
Diode			
V _R	Reverse Voltage	V	5.0
I _F	Forward Current (DC)	mA	50
P _D	Power Dissipation	mW	50
I _{FP}	Peak Forward Current ²	A	1
MOSFET			
V _L	Break Down Voltage	V	400
I _L	Continuous Load Current ³	mA	
	Connection A		90
	Connection B		120
	Connection C		180
I _{LP}	Pulse Load Current ⁴	mA	180
P _D	Power Dissipation	mW	560
Coupled			
BV	Isolation Voltage ⁵	Vr.m.s.	3,750
P _T	Total Power Dissipation	mW	610
T _{STG}	Storage Temperature	°C	-40 to +125
T _A	Operating Ambient Temp.	°C	-40 to +85

Notes:

- Operation in excess of any one of these parameters may result in permanent damage.
- PW = 100 μs, Duty Cycle = 1%
- Conditions: I_F ≥ 2 mA. The following types of load connections are available.

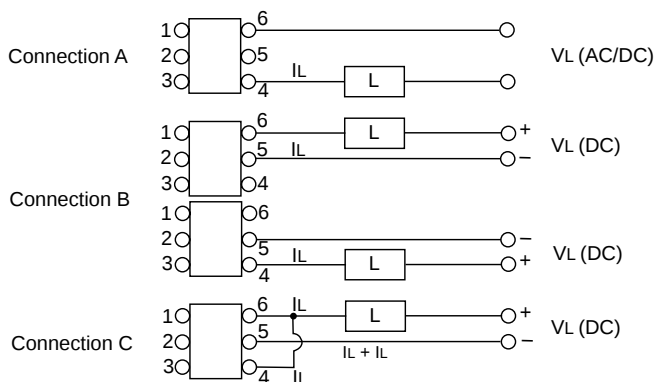

- PW = 100 ms, 1 shot
- AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and output.

RECOMMENDED


OPERATING CONDITIONS (T_A = 25 °C)

SYMBOL	PARAMETER	UNITS	MIN	TYP	MAX
I _F	LED Operating Current	mA	2	10	20
V _F	LED Off Voltage	V	0		0.5

OUTLINE DIMENSIONS (Units in mm)


PS7341B-1B

- LED Anode
- LED Cathode
- NC
- MOSFET Drain
- MOSFET Source
- MOSFET Drain

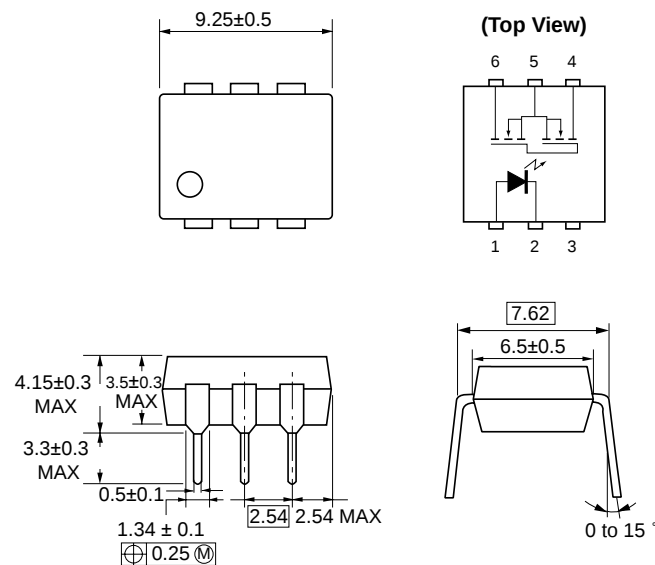

PS7341BL-1B

- LED Anode
- LED Cathode
- NC
- MOSFET Drain
- MOSFET Source
- MOSFET Drain

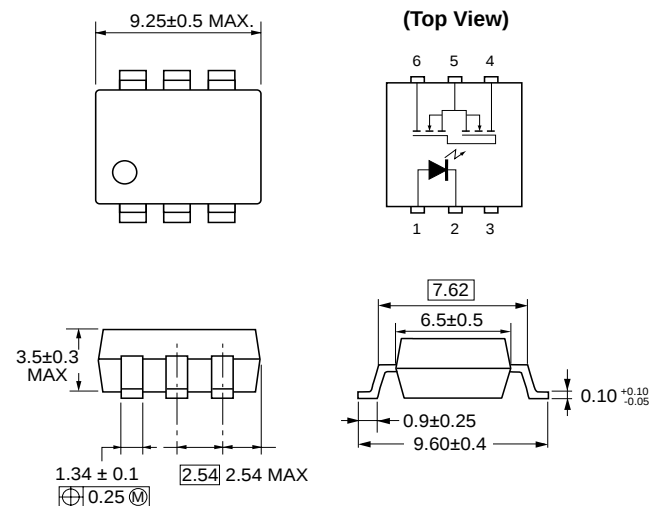

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com