

TOSHIBA

MICROWAVE SEMICONDUCTOR

TECHNICAL DATA

MICROWAVE POWER GaAs FET

S8850A

FEATURES:

- HIGH POWER
 $P_{1dB} = 21.5\text{dBm}$ at $f = 15\text{ GHz}$
- HIGH GAIN
 $G_{1dB} = 9.0\text{ dB}$ at $f = 15\text{ GHz}$
- SUITABLE FOR Ku-BAND AMPLIFIER
- ION IMPLANTATION

RF PERFORMANCE SPECIFICATIONS ($T_a = 25^\circ\text{C}$)

TYPE NUMBER (PACKAGE CODE)				S8850A (2-3K1B)			
CHARACTERISTIC	SYMBOL	CONDITION		UNIT	MIN.	TYP.	MAX.
		f	V _{DS}				
Output Power at 1dB compression Point	P _{1dB}	15 GHz	10V	dBm	20.5	21.5	-
			8 V		-	20.5	-
Power Gain at 1dB Compression Point	G _{1dB}		10V	dB	8.0	9.0	-
			8 V		-	9.0	-
Drain Current	I _{DS}		10V	A	-	0.06	0.09
			8 V		-	0.06	0.09
Power Added Efficiency	η_{add}		10V	%	-	21	-
			8 V		-	20	-

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

TYPE NUMBER (PACKAGE CODE)				S8850A (2-3K1B)		
CHARACTERISTIC	SYMBOL	CONDITION	UNIT	MIN.	TYP.	MAX.
Trans-conductance	g_m	V _{DS} = 3V I _{DS} = 45mA	mS	-	30	-
Pinch-off Voltage	V _{GSoff}	V _{DS} = 3V I _{DS} = 1.5mA	V	-2.5	-3.5	-5
Saturated Drain Current	I _{DSS}	V _{DS} = 3V V _{GS} = 0V	A	-	0.1	0.125
Gate to Source Breakdown Voltage	V _{GSO}	I _{GS} = -1.5 μ A	V	-5	-	-
Thermal Resistance	R _{th(c-c)}	Channel to case	$^\circ\text{C/W}$	-	90	150

- * The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- * The information contained herein may be changed without prior notice. It is therefore advisable to contact TOSHIBA before proceeding with the design of equipment incorporating this product.




S8850A

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

TYPE NUMBER (PACKAGE CODE)			S8850A (2-3K1B)
CHARACTERISTIC	SYMBOL	UNIT	RATING
Drain-Source Voltage	V_{DS}	V	15
Gate-Source Voltage	V_{GS}	V	-5
Drain Current	I_D	A	0.125
Total Power Dissipation (Tc=25°C)	P_T	W	1.0
Channel Temperature	T_{ch}	°C	175
Storage Temperature	T_{stg}	°C	-65 ~ 175

PACKAGE OUTLINE (2-3K1B)

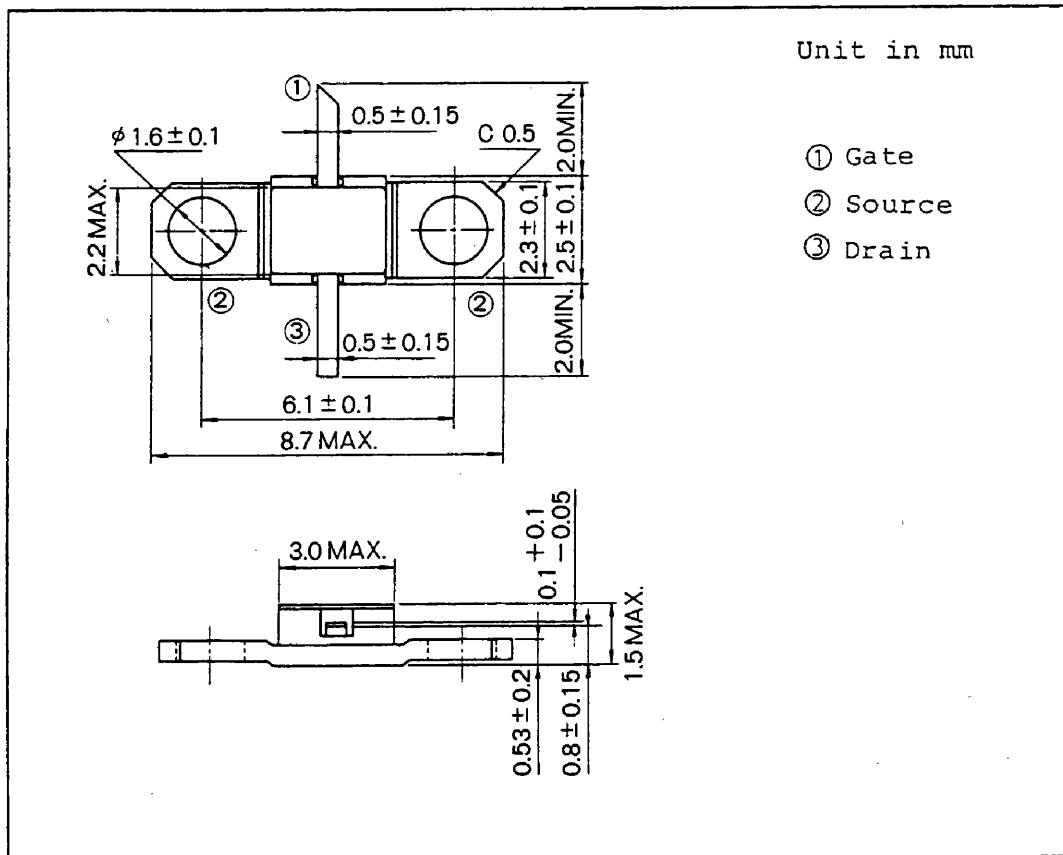


HANDLING PRECAUTIONS FOR PACKAGED TYPE


Soldering iron should be grounded and the operating time should not exceed 10 seconds at 260°C.

S8850A

RF PERFORMANCES

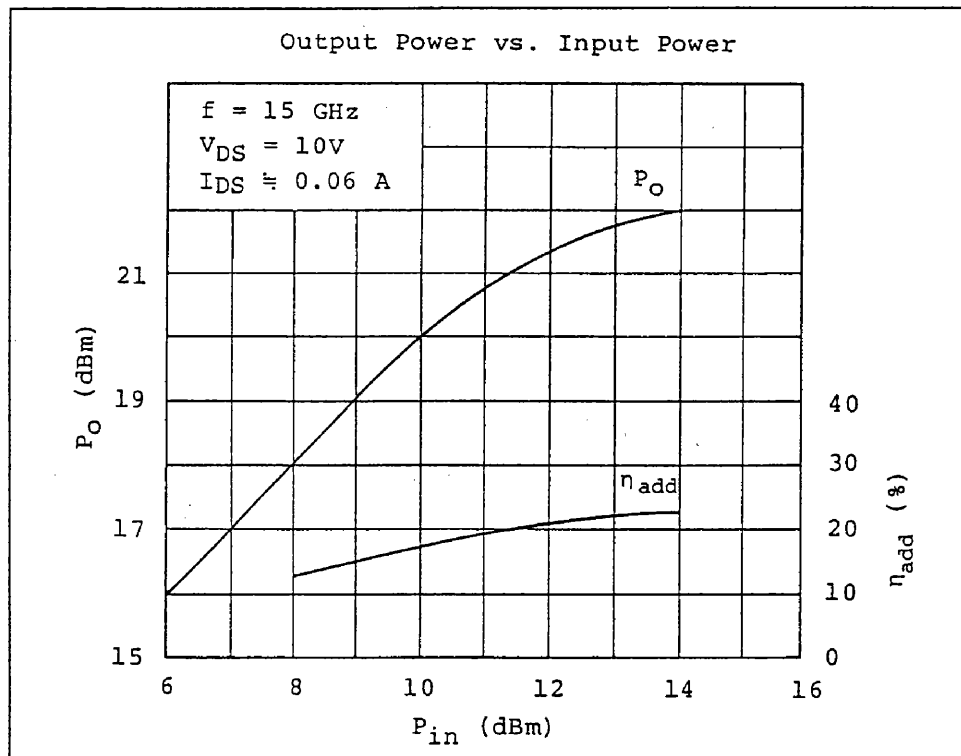


POWER DISSIPATION VS. CASE TEMPERATURE

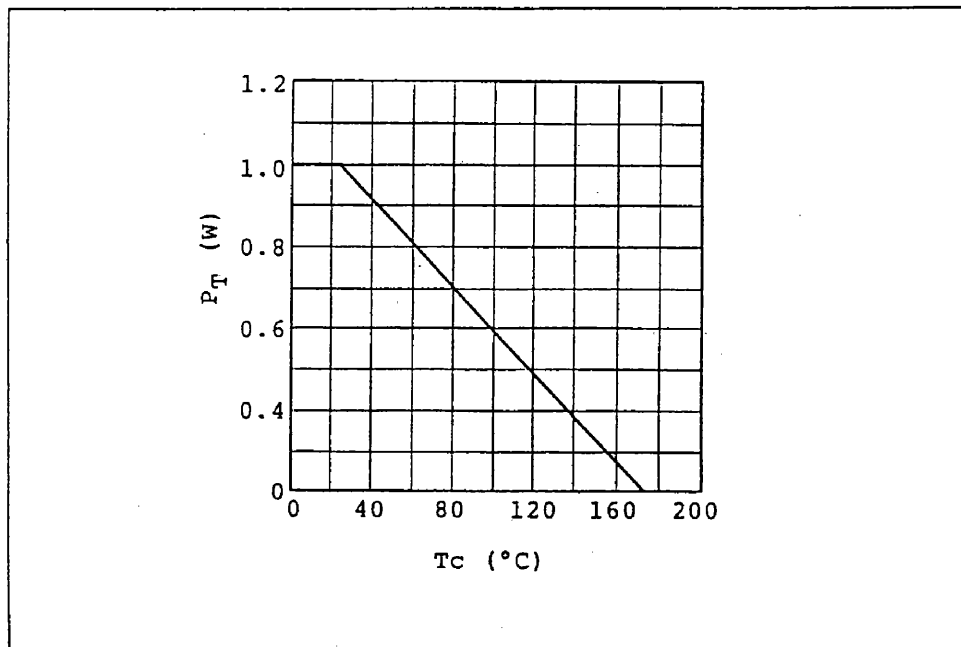

S8850A

S8850A S-PARAMETERS (MAGN. and ANGLES)

$V_{DS} = 10 \text{ V}$, $I_{DS} = 50 \text{ mA}$

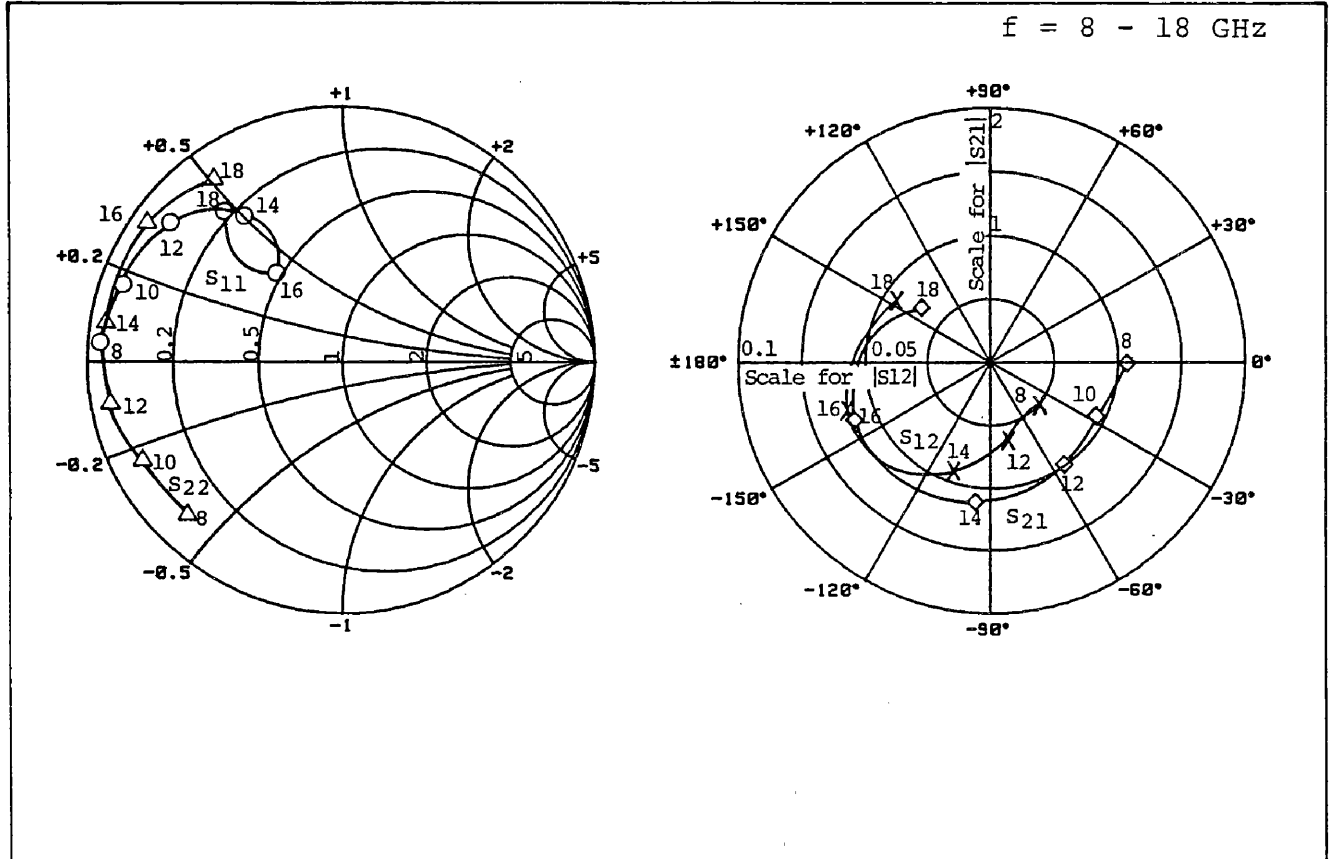

FREQUENCY (GHz)	S_{11}		S_{12}		S_{21}		S_{22}	
8	0.95	176	0.026	-47	1.06	-1	0.87	-135
9	0.92	169	0.024	-51	0.94	-14	0.88	-145
10	0.91	161	0.024	-58	0.91	-27	0.89	-153
11	0.89	151	0.027	-66	0.91	-40	0.91	-160
12	0.87	141	0.032	-76	0.97	-56	0.93	-169
13	0.81	132	0.039	-88	1.01	-74	0.95	-177
14	0.68	125	0.045	-108	1.09	-95	0.94	172
15	0.53	118	0.057	-130	1.21	-122	0.94	160
16	0.43	127	0.060	-161	1.18	-156	0.94	145
17	0.55	135	0.058	173	0.99	169	0.89	132
18	0.74	129	0.044	149	0.70	141	0.88	126

Copyright Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com