

KEY FEATURES

- Power Modules for PCB Mounting
- Regulated Output
- Low Ripple and Noise
- 2-Year Product Warranty




ELECTRICAL SPECIFICATIONS

Model No.	SA 06-24-3.3S	SA 06-24-5S	SA 06-24-12S	SA 06-24-15S	SA 06-24-24S
Max. output wattage (W)	5W	6W	6W	6W	6W
Input voltage (V.DC.)	24V (18-36V)	24V (18-36V)	24V (18-36V)	24V (18-36V)	24V (18-36V)
Output voltage (V.DC.)	3.3V / 1500mA	5V / 1200mA	12V / 500mA	15V / 400mA	24V / 250mA

Model No.	SA 06-24-3.3S	SA 06-24-5S	SA 06-24-12S	SA 06-24-15S	SA 06-24-24S	
Max output wattage (W)	5W	6W	6W	6W	6W	
Input	Input filter: π type					
Output	Voltage (V.DC.)	3.3	5	12	15	24
	Voltage accuracy	$\pm 2\%$	$\pm 2\%$	$\pm 2\%$	$\pm 2\%$	$\pm 2\%$
	Current (mA) max	1500	1200	500	400	250
	Line regulation (HL-LL) (typ.)	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$
	Load regulation (10-100%) (typ.)	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$
	Ripple	$< 0.2\%$ Vout +20mV max (Vp-p)				
	Noise	$< 0.5\%$ Vout +50mV max (Vp-p)				
	Efficiency	76%	79%	82%	82%	83%
Protection	Switching frequency	125KHz	125KHz	125KHz	125KHz	
	Over current protection	Works over 120% of rating and recovers automatically.				
	Over voltage protection	Zener diode clamp				
Isolation	Short circuit protection	Current limit, auto-recovery				
	Voltage	1600 VDC.				
	Resistance	10^9 ohms				
Environment	Capacitance	1000 pF				
	Operating temperature	$-25^{\circ}\text{C} \dots +71^{\circ}\text{C}$				
	Storage temperature	$-55^{\circ}\text{C} \dots +105^{\circ}\text{C}$				
	Case temperature	$+95^{\circ}\text{C}$ max.				
	Temperature coefficient	$\pm 0.02\%$ Per $^{\circ}\text{C}$				
	Humidity	95%RH				
Physical	MTBF	$> 800,000$ h @ 25°C (MIL-HDBK-217F)				
	Dimension (L x W x H)	2.0 x 1.0 x 0.55 Inches (50.8 x 25.4 x 14 mm)				
	Case Material	Six-side shielded Aluminum with Non-Conductive base				
	Weight	25 g				
Cooling method	Free-air convection					


All specifications valid at nominal input voltage, full load and $+25^{\circ}\text{C}$ after warm-up time unless otherwise stated.

MECHANICAL DIMENSION (Top View)

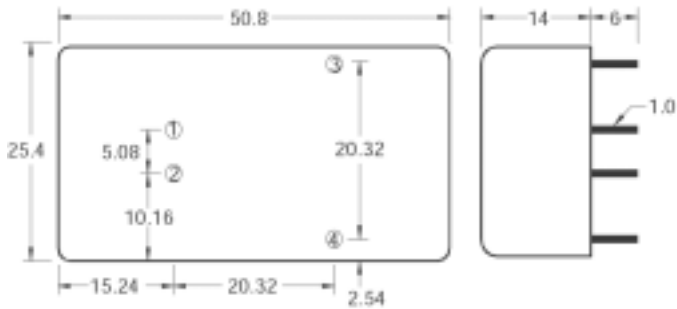

PIN#	Single
1	-DC IN
2	+DC IN
3	-DC OUT
4	+DC OUT

DERATING

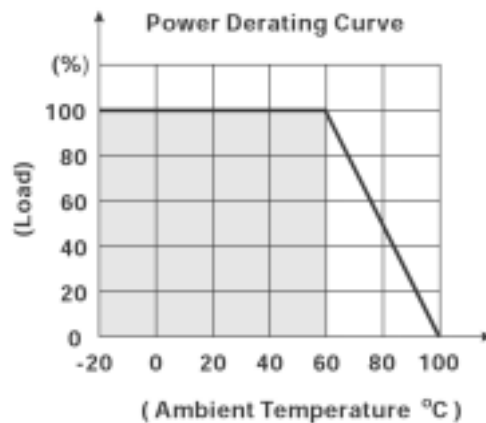

BLOCK DIAGRAM

Single Output

