


SB 220...SB 2100

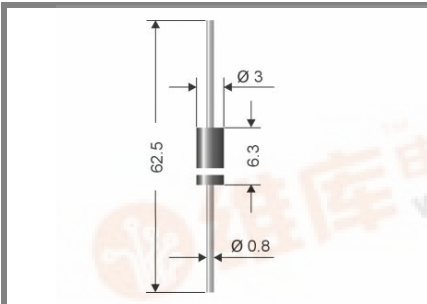

Axial lead diode

Schottky barrier rectifiers diodes

SB 220...SB 2100

Forward Current: 2 A

Reverse Voltage: 20 to 100 V

Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

Mechanical Data

- Plastic case DO-15 / DO-204AC
- Weight approx.: 0,4 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 4000 pieces per ammo

¹⁾ Valid, if leads are kept at ambient temperature at a distance of 10 mm from case


²⁾ $I_F = 2 \text{ A}$, $T_J = 25^\circ\text{C}$

³⁾ $T_A = 25^\circ\text{C}$

Type	Repetitive peak reverse voltage V_{RRM} V	Surge peak reverse voltage V_{RSM} V	Max. reverse recovery time $I_F = -A$ $I_R = -A$ $I_{RR} = -A$ t_{rr} ns	Max. forward voltage $V_F^{2)}$
SB 220	20	20	-	0,50
SB 230	30	30	-	0,50
SB 240	40	40	-	0,50
SB 250	50	50	-	0,70
SB 260	60	60	-	0,70
SB 290	90	90	-	0,79
SB 2100	100	100	-	0,79



Absolute Maximum Ratings		$T_c = 25^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
I_{FAV}	Max. averaged fwd. current, R-load, $T_A = 50^\circ\text{C}^{1)}$	2	A
I_{FRM}	Repetitive peak forward current $f > 15 \text{ Hz}^{1)}$	12	A
I_{FSM}	Peak forward surge current 50 Hz half sinus-wave ³⁾	50	A
i^2t	Rating for fusing, $t < 10 \text{ ms}^{3)}$	12,5	A ² s
R_{thA}	Max. thermal resistance junction to ambient ¹⁾	45	K/W
R_{thT}	Max. thermal resistance junction to terminals ¹⁾	15	K/W
T_j	Operating junction temperature	-50...+150	°C
T_s	Storage temperature	-50...+175	°C

Characteristics		$T_c = 25^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
I_R	Maximum leakage current, $T_j = 25^\circ\text{C}$; $V_R = V_{RRM}$	<0,5	mA
	$T_j = 100^\circ\text{C}$; $V_R = V_{RRM}$	<5,0	mA
C_J	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
Q_{rr}	Reverse recovery charge ($U_R = V$; $I_F = A$; $dI_F/dt = A/ms$)	-	µC
E_{RSM}	Non repetitive peak reverse avalanche energy ($I_R = mA$; $T_j = ^\circ\text{C}$; inductive load switched off)	-	mJ

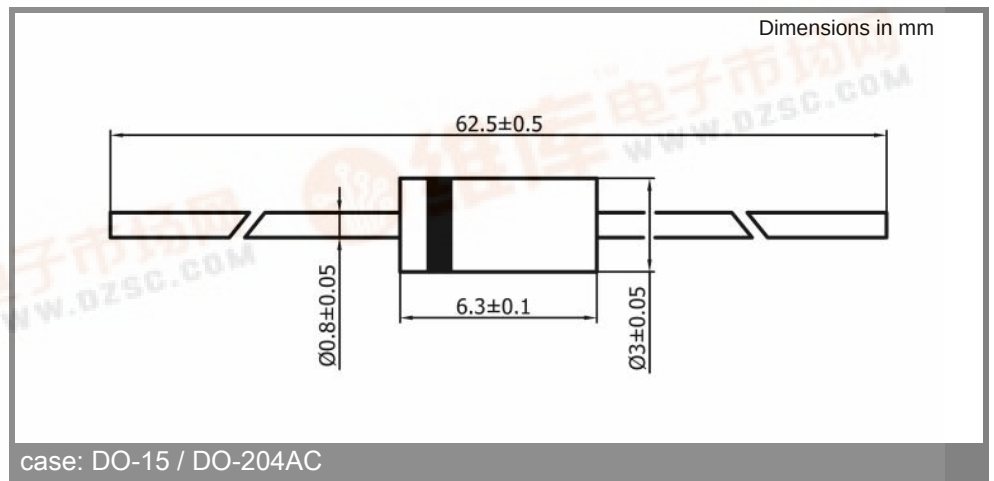

case: DO-15 / DO-204AC

SB 220...SB 2100

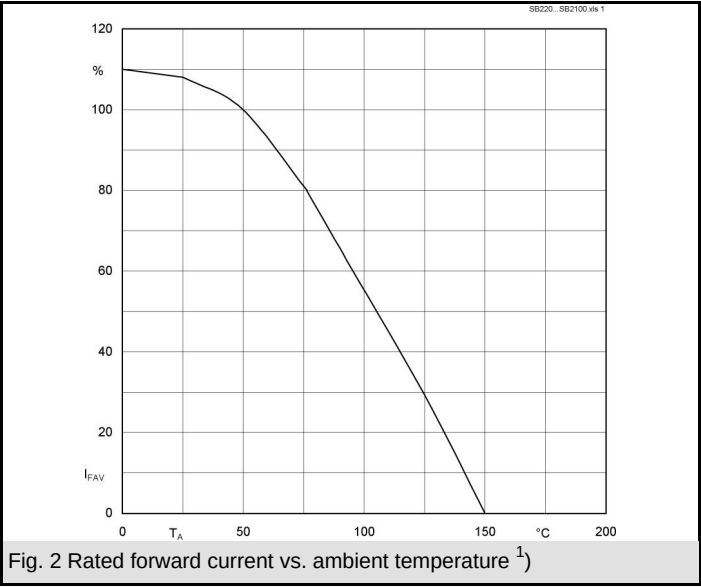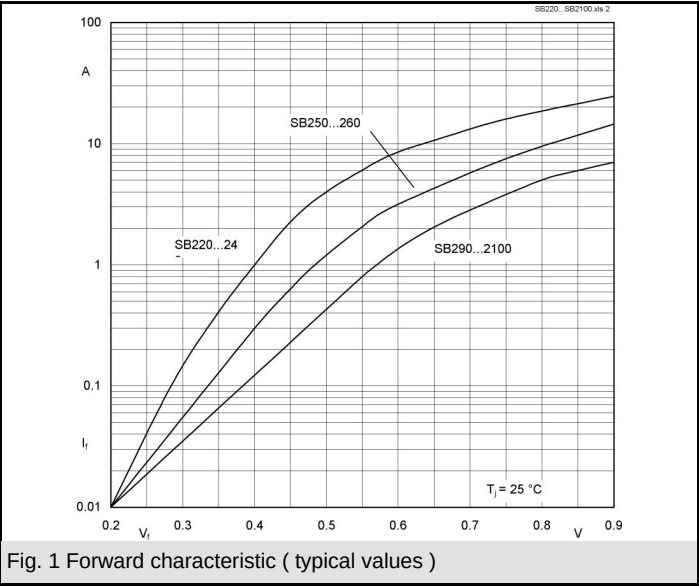

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com