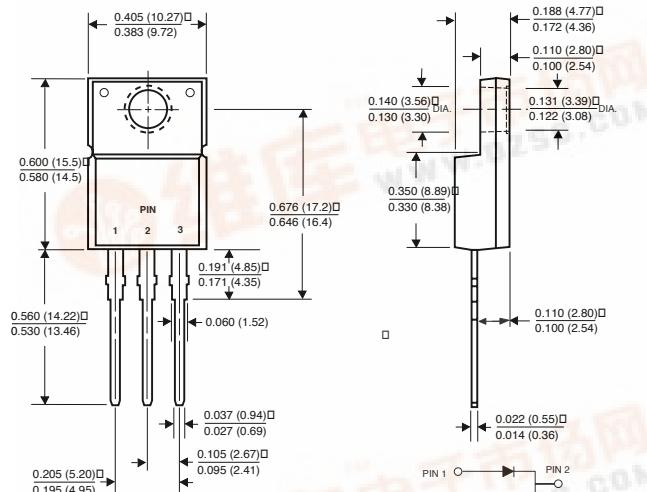


SBLF25L20CT THRU SBLF25L30CT

LOW VF SCHOTTKY ISOLATED PLASTIC RECTIFIER
Reverse Voltage - 20 and 25 Volts Forward Current - 25.0 Amperes

ITO-220AB

Dimensions in inches and (millimeters)

FEATURES

- ◆ Isolated plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability
- ◆ Very low forward voltage drop
- ◆ High surge capability
- ◆ Guardring for overvoltage protection
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.16" (4.06mm) from case

**MECHANICAL DATA****Case:** JEDEC ITO-220AB fully overmolded plastic body**Terminals:** Leads solderable per MIL-STD-750, Method 2026**Polarity:** As marked**Mounting Position:** Any**Weight:** 0.08 ounce, 2.24 grams**Mounting Torque:** 5in.-lbs. max.**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SBLF25L20CT	SBLF25L25CT	SBLF25L30CT	UNITS
Maximum repetitive peak reverse voltage	V _R RM	20	25	30	Volts
Maximum RMS voltage	V _R M _S	14	17	21	Volts
Maximum DC blocking voltage	V _D C	20	25	30	Volts
Maximum average forward rectified current at T _C =95°C	I _F (AV)		25.0		Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FS} M		180.0		Amps
Maximum instantaneous forward voltage per leg at 12.5A (NOTE 1) T _C =125°C T _C =25°C	V _F		0.39 0.49		Volts
Maximum instantaneous reverse current at rated DC blocking voltage per leg (NOTE 1) T _C =25°C T _C =100°C T _C =125°C	I _R		1.0 50.0 100.0		mA
Typical thermal resistance per leg (NOTE 2)	R _{θJC}		4.0		°C/W
Operating junction and storage temperature range	T _J , T _{STG}		-40 to +125		°C
RMS Isolation voltage from terminals to heatsink with RH ≤ 30%	V _{ISOL}		4500 (NOTE 3) 3500 (NOTE 4) 1500 (NOTE 5)		Volts

NOTES:

(1) Pulse test: 300μs pulse width, 1% duty cycle

(2) Thermal resistance from junction to case per leg

(3) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset.

(4) Clip mounting (on case), where leads do overlap heatsink.

(5) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19").

RATINGS AND CHARACTERISTIC CURVES SBLF25L20CT THRU SBLF25L30CT

FIG. 1 - FORWARD CURRENT DERATING CURVE

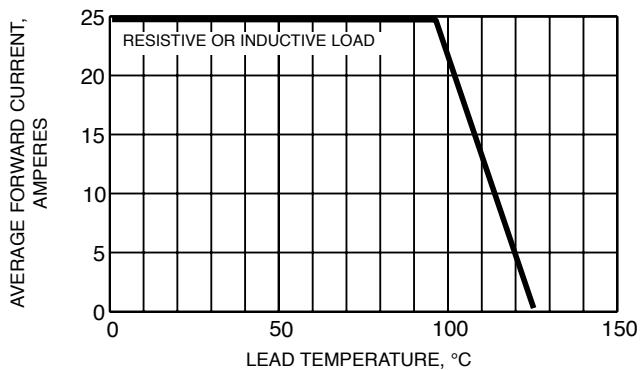


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

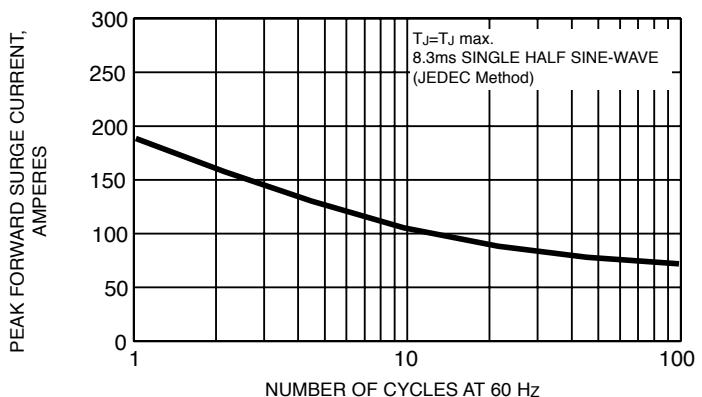


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

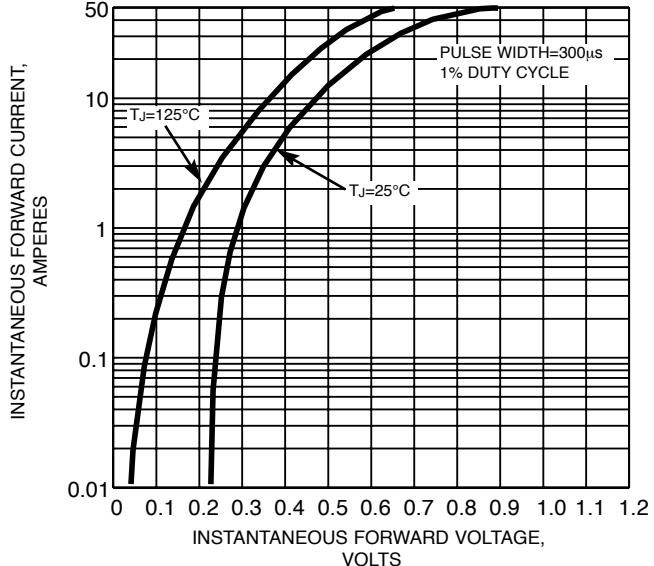


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

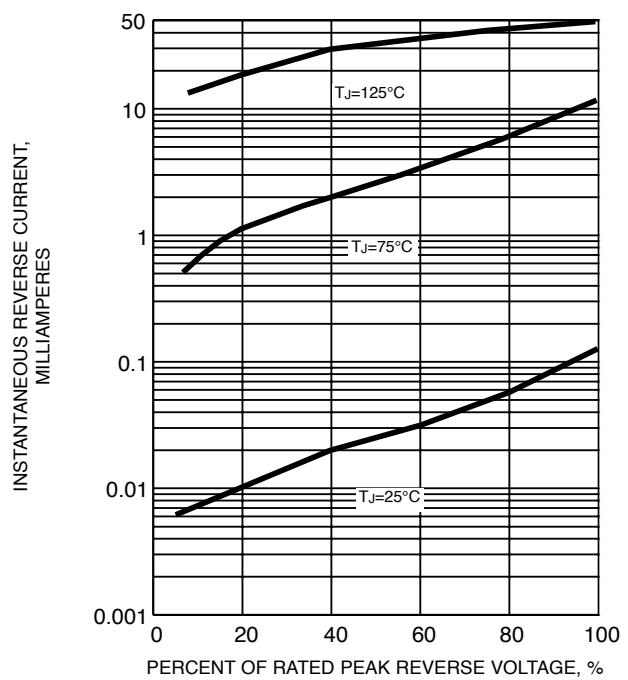


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

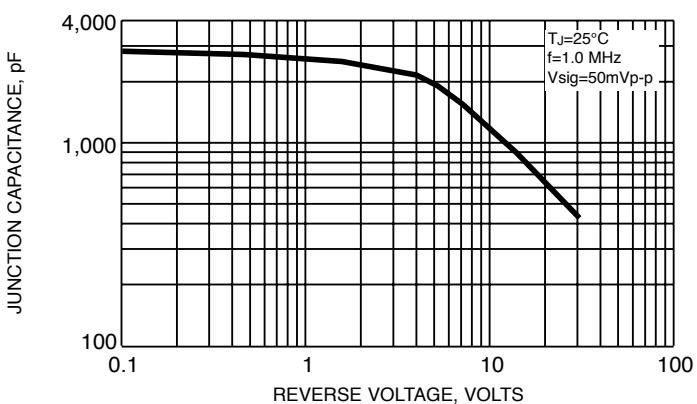


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

